

## MOS FET Relays

G3VM-61B1/E1

**Analog-switching MOS FET Relay for High Switching Currents, with Dielectric Strength of 2.5 kVAC between I/O.**


- Upgraded G3VM-61 B/E Series.
- Switches minute analog signals.
- Leakage current of 1  $\mu$ A max. when output relay is open.

### Application Examples

- Measurement devices
- Security systems
- Amusement machines

### List of Models

| Contact form | Terminals                  | Load voltage (peak value) | Model         | Number per stick | Number per tape |
|--------------|----------------------------|---------------------------|---------------|------------------|-----------------|
| SPST-NO      | PCB terminals              | 60 VAC                    | G3VM-61B1     | 50               | ---             |
|              | Surface-mounting terminals |                           | G3VM-61E1     |                  |                 |
|              |                            |                           | G3VM-61E1(TR) | ---              |                 |

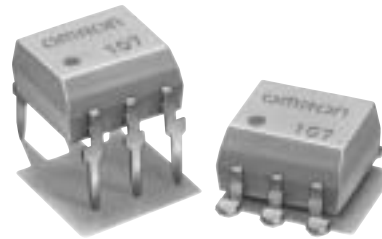



**NEW** Approval pending

**Note:** The actual product is marked differently from the image shown here.

### Dimensions



**Note:** All units are in millimeters unless otherwise indicated.

#### G3VM-61B1

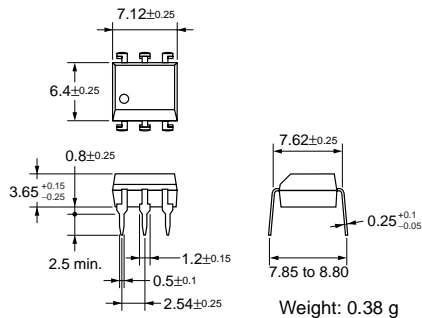

**Note:** The actual product is marked differently from the image shown here.


#### G3VM-61E1

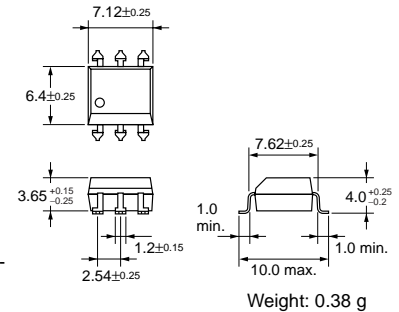


**Note:** The actual product is marked differently from the image shown here.

### Terminal Arrangement/Internal Connections (Top View)

#### G3VM-61B1




#### G3VM-61E1




### PCB Dimensions (Bottom View)

#### G3VM-61B1



### Actual Mounting Pad Dimensions (Recommended Value, Top View)

#### G3VM-61E1




**Absolute Maximum Ratings (Ta = 25°C)**

| Item   | Symbol                              | Rating                      | Unit                           | Measurement Conditions |                               |                |
|--|-------------------------------------|-----------------------------|--------------------------------|------------------------|-------------------------------|----------------|
| Input  | LED forward current                 | $I_F$                       | 50                             | mA                     |                               |                |
|  | Repetitive peak LED forward current | $I_{FP}$                    | 1                              | A                      | 100 $\mu$ s pulses, 100 pps   |                |
|  | LED forward current reduction rate  | $\Delta I_F/^\circ\text{C}$ | -0.5                           | mA/°C                  | Ta $\geq$ 25°C                |                |
|  | LED reverse voltage                 | $V_R$                       | 5                              | V                      |                               |                |
|  | Connection temperature              | $T_j$                       | 125                            | °C                     |                               |                |
| Output   | Output dielectric strength          | $V_{OFF}$                   | 60                             | V                      |                               |                |
|  | Continuous load current             | Connection A                | $I_O$                          | 500                    | mA                            |                |
|  |                                     | Connection B                |                                | 500                    |                               |                |
|  |                                     | Connection C                |                                | 1,000                  |                               |                |
|  | ON current reduction rate           | Connection A                | $\Delta I_{ON}/^\circ\text{C}$ | -0.5                   | mA/°C                         | Ta $\geq$ 25°C |
|  |                                     | Connection B                |                                | -0.5                   |                               |                |
| Connection C   |                                     |                             | -10.0                          |                        |                               |                |
| Connection temperature                                     | $T_j$                               | 125                         | °C                             |                        |                               |                |
| Dielectric strength between input and output (See note 1.) |                                     | $V_{I-O}$                   | 2,500                          | Vrms                   | AC for 1 min                  |                |
| Operating temperature                                      |                                     | $T_a$                       | -40 to +85                     | °C                     | With no icing or condensation |                |
| Storage temperature  |                                     | $T_{stg}$                   | -55 to +125                    | °C                     | With no icing or condensation |                |
| Soldering temperature (10 s)                               |                                     | ---                         | 260                            | °C                     | 10 s                          |                |

**Note:** 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


Connection Diagram

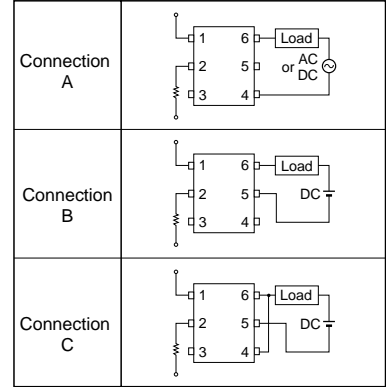

**Electrical Characteristics (Ta = 25°C)**

| Item                           | Symbol                                 | Minimum      | Typical  | Maximum | Unit       | Measurement conditions   |                  |                                |
|--------------------------------|--|--------------|----------|---------|------------|--|------------------|--------------------------------|
| Input                          | LED forward voltage                    | $V_F$        | 1.0      | 1.15    | 1.3        | V  | $I_F = 10$ mA    |                                |
|                                | Reverse current                        | $I_R$        | ---      | ---     | 10         | $\mu$ A  | $V_R = 5$ V      |                                |
|                                | Capacity between terminals             | $C_T$        | ---      | 30      | ---        | pF   | V = 0, f = 1 MHz |                                |
|                                | Trigger LED forward current            | $I_{FT}$     | ---      | 1.6     | 3          | mA   | $I_O = 500$ mA   |                                |
| Output                         | Maximum resistance with output ON      | Connection A | $R_{ON}$ | ---     | 1          | 2  | $\Omega$         | $I_F = 5$ mA, $I_O = 500$ mA   |
|                                |  | Connection B |          | ---     | 0.5        | 1  | $\Omega$         | $I_F = 5$ mA, $I_O = 500$ mA   |
|                                |  | Connection C |          | ---     | 0.25       | ---  | $\Omega$         | $I_F = 5$ mA, $I_O = 1,000$ mA |
|                                | Current leakage when the relay is open | $I_{LEAK}$   | ---      | ---     | 1.0        | $\mu$ A  | $V_{OFF} = 60$ V |                                |
| Capacity between I/O terminals | $C_{I-O}$                              | ---          | 0.8      | ---     | pF         | f = 1 MHz, Vs = 0 V  |                  |                                |
| Insulation resistance          | $R_{I-O}$                              | 1,000        | ---      | ---     | M $\Omega$ | $V_{I-O} = 500$ VDC, RoH $\leq$ 60%                              |                  |                                |
| Turn-ON time                   | tON                                    | ---          | 0.8      | 2.0     | ms         | $I_F = 5$ mA, $R_L = 200 \Omega$ , $V_{DD} = 20$ V (See note 2.) |                  |                                |
| Turn-OFF time                  | tOFF                                   | ---          | 0.1      | 0.5     | ms         |  |                  |                                |

**Note:** 2. Turn-ON and Turn-OFF Times



**Recommended Operating Conditions**


Use the G3VM under the following conditions so that the Relay will operate properly.

| Item                          | Symbol   | Minimum | Typical | Maximum | Unit |
|-------------------------------|----------|---------|---------|---------|------|
| Output dielectric strength    | $V_{DD}$ | ---     | ---     | 48      | V    |
| Operating LED forward current | $I_F$    | 5       | 7.5     | 25      | mA   |
| Continuous load current       | $I_O$    | ---     | ---     | 500     | mA   |
| Operating temperature         | $T_a$    | -20     | ---     | 65      | °C   |

**Engineering Data**

**Load Current vs. Ambient Temperature**

G3VM-61B1(E1)

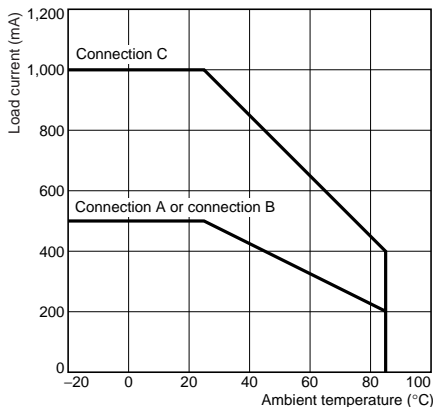

**Safety Precautions**

Refer to page 6 for precautions common to all G3VM models.