


SDS-plus hammer drills with 4 cutters

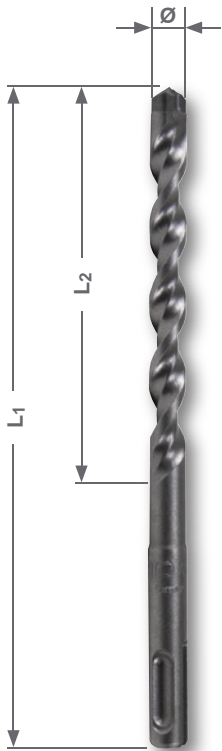

Extreme stability through core strengthening, thereby providing maximum power transmission from hammer drill to drill bit. High wear resistance due to special blasting treatment for hardening. 4 cutters with conical centering point for precise drilling guidance. Spiral geometry for optimal drilling dust removal. Particularly suitable for fastening techniques, because a wear mark serves as a control point and thus ensures an exact drill diameter.

Applications: for granite, concrete, clinker, stone, brick, tile and marble. In all hammer drills with SDS-plus adaptor and 2-groove adaptor such as Hilti TE 10-22.

Packaging: in plastic clip of 1 each

Ø mm	Ø inch	L1 mm	L2 mm	Article no.
5,0	3/16	110,0	50,0	213 050
5,0	3/16	160,0	100,0	213 051
5,0	3/16	210,0	150,0	213 052
5,5	7/32	110,0	50,0	213 055
5,5	7/32	160,0	100,0	213 056
6,0	15/64	115,0	50,0	213 060
6,0	15/64	165,0	100,0	213 061
6,0	15/64	215,0	150,0	213 062
6,0	15/64	265,0	200,0	213 063
6,5	8/32	115,0	50,0	213 065
6,5	8/32	165,0	100,0	213 066
6,5	8/32	265,0	200,0	213 067
8,0	5/16	115,0	50,0	213 080
8,0	5/16	165,0	100,0	213 081
8,0	5/16	215,0	150,0	213 082
8,0	5/16	265,0	200,0	213 083
8,0	5/16	365,0	300,0	213 084
8,0	5/16	465,0	400,0	213 085
10,0	3/8	115,0	50,0	213 100
10,0	3/8	165,0	100,0	213 101
10,0	3/8	215,0	150,0	213 102
10,0	3/8	265,0	200,0	213 103
10,0	3/8	365,0	300,0	213 104
10,0	3/8	465,0	400,0	213 105
12,0	15/32	165,0	100,0	213 120
12,0	15/32	215,0	150,0	213 121
12,0	15/32	265,0	200,0	213 122
12,0	15/32	365,0	300,0	213 123
12,0	15/32	465,0	400,0	213 124
14,0	9/16	165,0	100,0	213 140
14,0	9/16	215,0	150,0	213 141
14,0	9/16	265,0	200,0	213 142
14,0	9/16	365,0	300,0	213 143
14,0	9/16	465,0	400,0	213 144

