





# Series 4004/G

- Contacting of individual test points
- Contacting without adapter possible
- For use in function test
- Replacement without soldering

## Tip style • Diameter • Plating

			
<b>BST1</b>	<b>C</b>	<b>G</b>	<b>V</b>
1.50 Rh	2.50 Rh	1.30 Rh	1.00 Rh

### Mechanical Data

Center	4.00 mm/ 160 mil
Full travel	10.00 mm
Working travel	6.00 mm
Operating pressure	6 bar
Operating medium	Druckluft (gefiltert, ölfrei)
Spring force at working travel	0.60 N

### Electrical Data

Max. current rating	2.0 A
Typical continuity resistance	<= 30 mOhm


### Materials

Barrel	brass, gold plated
Spring	spring steel, gold plated
Plunger	steel
Receptacle	brass, gold plated


### Recommended diameter of drill

HP 2361.1 (Trolitax)	3.40 mm
HGW 2371	3.41 mm


4004/G

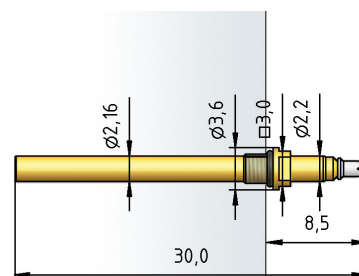


H 4004/GR

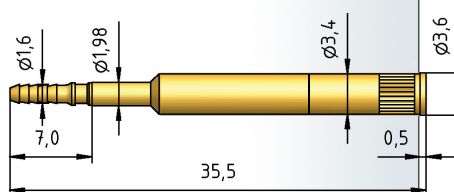

H 4004/GR-L

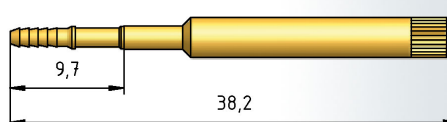

L 4000



### How to order:

4004/G - BST1 - 0.6 N - Rh - 1.5 - L

1. series 2. threaded design 3. tip style 4. spring force 5. tip plating  
6. tip diameter 7. for connection of L 4000