

Capacitor Array (IPC)

BENEFITS OF USING CAPACITOR ARRAYS

AVX capacitor arrays offer designers the opportunity to lower placement costs, increase assembly line output through lower component count per board and to reduce real estate requirements.

Reduced Costs

Placement costs are greatly reduced by effectively placing one device instead of four or two. This results in increased throughput and translates into savings on machine time. Inventory levels are lowered and further savings are made on solder materials, etc.

Space Saving

Space savings can be quite dramatic when compared to the use of discrete chip capacitors. As an example, the 0508 4-element array offers a space reduction of >40% vs. 4 x 0402 discrete capacitors and of >70% vs. 4 x 0603 discrete capacitors. (This calculation is dependent on the spacing of the discrete components.)

Increased Throughput

Assuming that there are 220 passive components placed in a mobile phone:

A reduction in the passive count to 200 (by replacing discrete components with arrays) results in an increase in throughput of approximately 9%.

A reduction of 40 placements increases throughput by 18%.


For high volume users of cap arrays using the very latest placement equipment capable of placing 10 components per second, the increase in throughput can be very significant and can have the overall effect of reducing the number of placement machines required to mount components:

If 120 million 2-element arrays or 40 million 4-element arrays were placed in a year, the requirement for placement equipment would be reduced by one machine.

During a 20Hr operational day a machine places 720K components. Over a working year of 167 days the machine can place approximately 120 million. If 2-element arrays are mounted instead of discrete components, then the number of placements is reduced by a factor of two and in the scenario where 120 million 2-element arrays are placed there is a saving of one pick and place machine.


Smaller volume users can also benefit from replacing discrete components with arrays. The total number of placements is reduced thus creating spare capacity on placement machines. This in turn generates the opportunity to increase overall production output without further investment in new equipment.

W2A (0508) Capacitor Arrays

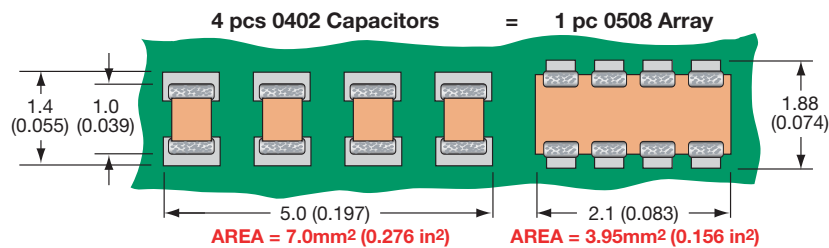

The 0508 4-element capacitor array gives a PCB space saving of over 40% vs four 0402 discretés and over 70% vs four 0603 discrete capacitors.


W3A (0612) Capacitor Arrays

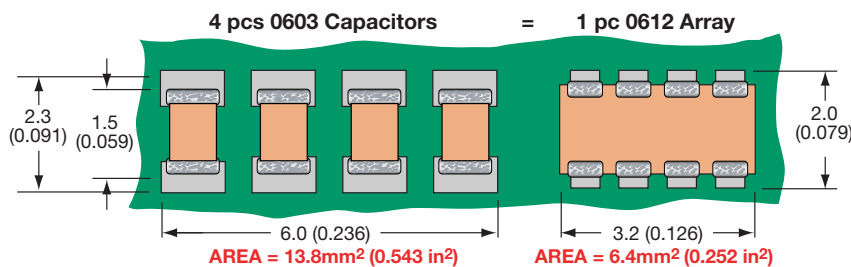

The 0612 4-element capacitor array gives a PCB space saving of over 50% vs four 0603 discretés and over 70% vs four 0805 discrete capacitors.

PART & PAD LAYOUT DIMENSIONS

millimeters (inches)

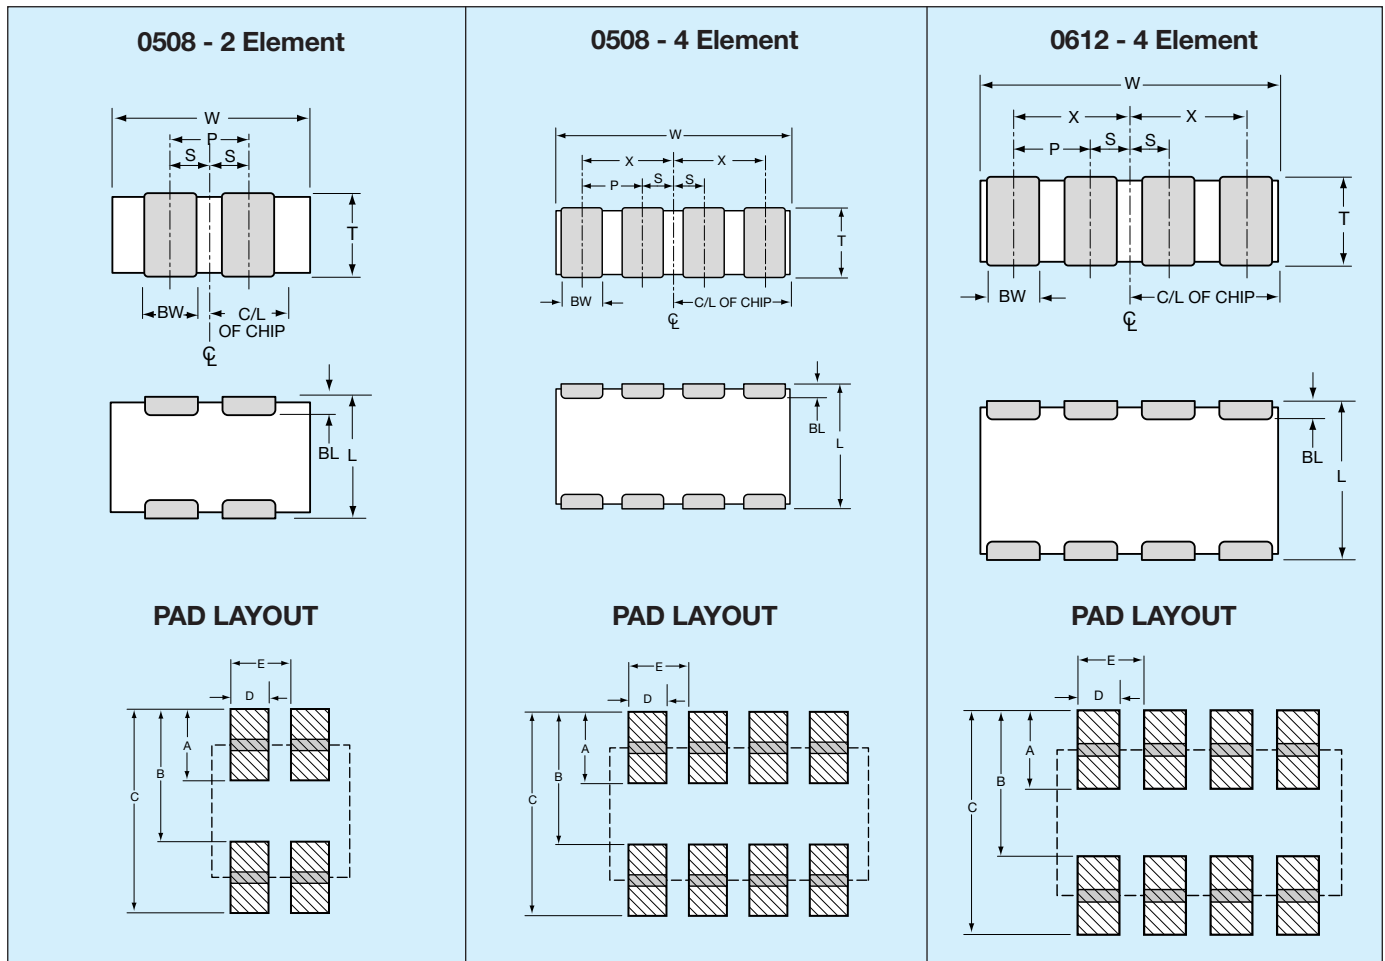

PART DIMENSIONS

0508 - 2 Element

L	W	T	BW	BL	P	S
1.30 ± 0.15 (0.051 ± 0.006)	2.10 ± 0.15 (0.083 ± 0.006)	0.94 MAX (0.037 MAX)	0.43 ± 0.10 (0.017 ± 0.004)	0.33 ± 0.08 (0.013 ± 0.003)	1.00 REF (0.039 REF)	0.50 ± 0.10 (0.020 ± 0.004)

0508 - 4 Element

L	W	T	BW	BL	P	X	S
1.30 ± 0.15 (0.051 ± 0.006)	2.10 ± 0.15 (0.083 ± 0.006)	0.94 MAX (0.037 MAX)	0.25 ± 0.06 (0.010 ± 0.003)	0.20 ± 0.08 (0.008 ± 0.003)	0.50 REF (0.020 REF)	0.75 ± 0.10 (0.030 ± 0.004)	0.25 ± 0.10 (0.010 ± 0.004)

0612 - 4 Element

L	W	T	BW	BL	P	X	S
1.60 ± 0.20 (0.063 ± 0.008)	3.20 ± 0.20 (0.126 ± 0.008)	1.35 MAX (0.053 MAX)	0.41 ± 0.10 (0.016 ± 0.004)	0.18 ^{+0.25} _{-0.08} (0.007 ^{+0.010} _{-0.003})	0.76 REF (0.030 REF)	1.14 ± 0.10 (0.045 ± 0.004)	0.38 ± 0.10 (0.015 ± 0.004)

PAD LAYOUT DIMENSIONS

0508 - 2 Element

A	B	C	D	E
0.68 (0.027)	1.32 (0.052)	2.00 (0.079)	0.46 (0.018)	1.00 (0.039)

0508 - 4 Element

A	B	C	D	E
0.56 (0.022)	1.32 (0.052)	1.88 (0.074)	0.30 (0.012)	0.50 (0.020)

0612 - 4 Element

A	B	C	D	E
0.89 (0.035)	1.65 (0.065)	2.54 (0.100)	0.46 (0.018)	0.76 (0.030)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

[W2A2YC102MAT2A](#) [W2A2YC103MAT2A](#) [W2A41A330KAT2A](#) [W2A43A470KAT2A](#) [W2A45A101KAT2A](#)
[W2A45C103KAT2A](#) [W2A45C471MAT2A](#) [W2A4YC103KAT2A](#) [W2A4YC103MAT2A](#) [W2A4YC104MAT2A](#)
[W2A4ZC103MAT2A](#) [W2A4ZC104MAT2A](#) [W3A41A220KAT2A](#) [W3A41A221KAT2A](#) [W3A41A331KAT2A](#)
[W3A41C103KAT2A](#) [W3A41C103MAT2A](#) [W3A41C222KAT2A](#) [W3A41C471K4T2A](#) [W3A41C472KAT2A](#)
[W3A43A221KAT2A](#) [W3A43C102MAT2A](#) [W3A43C332KAT2F](#) [W3A45A101JAT2F](#) [W3A45A101KAT2A](#)
[W3A45A330KAT2A](#) [W3A45A470KAT2A](#) [W3A45C103KAT2A](#) [W3A45C103MAT2A](#) [W3A45C222KAT2A](#)
[W3A45C333MAT2F](#) [W3A45C471MAT2A](#) [W3A4YC102MAT2A](#) [W3A4YC103MAT2A](#) [W3A4YC104KAT2A](#)
[W3A4YC104MAT2A](#) [W3A45A471KAT2A](#) [W3A45C472MAT2A](#) [W3A45C102MAT2A](#) [W3A45C473MAT2A](#)
[W3A43C332MAT2F](#) [W3A4YC104MAT1A](#) [W3A45A151KAT2A](#) [W2A43C103M4T2A](#) [W3A43C472KAT2A](#)
[W2A4YC222KAT2A](#) [W3A43A181KAT2A](#) [W3A45A100KAT2A](#) [W3A41A151KAT2A](#) [W3A45A220KAT2A](#)
[W2A4YA181KAT2A](#) [W3A45C331KAT2A](#) [W2A2YA101KAT2A](#) [W2A2ZC103MAT2A](#) [W2A2ZC473MAT2A](#)
[W2A21A101KAT2A](#) [W2A23A101KAT2A](#) [W2A23C103MAT2A](#) [W2A25A101KAT2A](#) [W2A25C103MAT2A](#)
[W2A4YA100KAT2A](#) [W2A4YA101JAT2A](#) [W2A4YA101KAT2A](#) [W2A4YA120KAT2A](#) [W2A4YA150KAT2A](#)
[W2A4YA180KAT2A](#) [W2A4YA201KAT2F](#) [W2A4YA220KAT2A](#) [W2A4YA221KAT2A](#) [W2A4YA270KAT2A](#)
[W2A4YA330KAT2A](#) [W2A4YA330KAT4A](#) [W2A4YA680KAT2A](#) [W2A4YC102MAT2A](#) [W2A4YC103MAT2F](#)
[W2A4YC103M4T2A](#) [W2A4YC152KAT2A](#) [W2A4YC183KAT2F](#) [W2A4YC222MAT2F](#) [W2A4YC331KAT2A](#)
[W2A4YC332KAT2A](#) [W2A4YC471KAT2A](#) [W2A4YC471KAT2F](#) [W2A4YC471MAT2A](#) [W2A4YC472MAT2A](#)
[W2A4YC681KAT2A](#) [W2A4YC682KAT2A](#) [W2A4ZA270KAT2A](#) [W2A4ZA470KAT2A](#) [W2A4ZC183KAT2F](#)
[W2A4ZC332KAT2A](#) [W2A4ZC471KAT2A](#) [W2A4ZC682KAT2A](#) [W2A41A100KAT2A](#) [W2A41A120KAT2A](#)
[W2A41A150KAT2A](#) [W2A41A270KAT2A](#) [W2A41A390KAT2A](#) [W2A41A390KAT2F](#) [W2A41A470JAT2A](#)