


**KEMET Part Number: PME264NC5220MR30**  
(P264CJ223M660A)

PME264/P264, Film, Metallized Paper, Safety, 0.022 uF, 20%, 660 VAC (X2), 1500 VDC, 85°C, Lead Spacing = 20.3mm

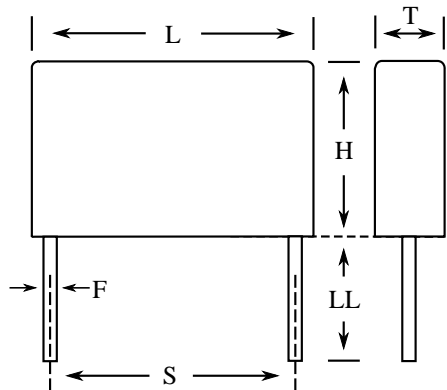

**General Information**

<b>Series:</b>	PME264/P264
<b>Dielectric:</b>	Metallized Paper
<b>Style:</b>	Radial
<b>Features:</b>	EMI Safety
<b>RoHS:</b>	Yes
<b>Lead:</b>	Wire Leads
<b>Qualifications:</b>	ENEC, UL, cUL
<b>AEC-Q200:</b>	No
<b>Construction:</b>	Molded

**Dimensions**

<b>L</b>	24mm MAX
<b>H</b>	15mm MAX
<b>T</b>	9mm MAX
<b>S</b>	20.3mm +/-0.4mm
<b>LL</b>	30mm +5mm
<b>F</b>	0.8mm NOM

**Specifications**

<b>Capacitance:</b>	0.022 uF
<b>Capacitance Tolerance:</b>	20%
<b>Voltage AC:</b>	660 VAC (X2)
<b>Voltage DC:</b>	1500 VDC
<b>Temperature Range:</b>	-40/+85°C
<b>Rated Temperature:</b>	85°C
<b>Dissipation Factor:</b>	1.30% 1kHz
<b>Insulation Resistance:</b>	12 GOhms
<b>Max dV/dt:</b>	1400 V/us
<b>Safety Class:</b>	X2

**Packaging Specifications**

<b>Packaging:</b>	Bulk, Bag
<b>Packaging Quantity:</b>	200