


New MOSFET Relay with Low Output Capacitance and ON Resistance ($C_{xR} = 5\text{pF} \cdot \Omega$) in a 20-V Load Voltage Model

- Output capacitance of 1 pF (typical) allows high-frequency applications.
- Leakage current of 1.0 nA max. when output relay is open.



NEW

Note: The actual product is marked differently from the image shown here.

List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NO	Surface-mounting terminals	20 VAC	G3VM-21GR	100	
			G3VM-21GR(TR)	---	2,500


Dimensions

Note: All units are in millimeters unless otherwise indicated.

G3VM-21GR




Note: The actual product is marked differently from the image shown here.

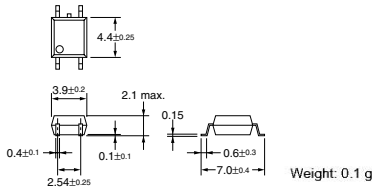


Terminal Arrangement/Internal Connections (Top View)

G3VM-21GR



Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-21GR



Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement Conditions	
Input	LED forward current	I_F	50	mA	
	Repetitive peak LED forward current	I_{FP}	1	A	100 μ s pulses, 100 pps
	LED forward current reduction rate	$\Delta I_{FM}/^{\circ}\text{C}$	0.5	mA/ $^{\circ}\text{C}$	Ta > 25 $^{\circ}\text{C}$
	LED reverse voltage	V_R	5	V	
	Connection temperature	T_J	125	$^{\circ}\text{C}$	
Output	Output dielectric strength	V_{OUT}	20	V	
	Continuous load current	I_O	160	mA	
	ON current reduction rate	$\Delta I_{OM}/^{\circ}\text{C}$	-1.6	mA/ $^{\circ}\text{C}$	Ta \geq 25 $^{\circ}\text{C}$
	Connection temperature	T_J	125	$^{\circ}\text{C}$	
	Dielectric strength between input and output (See note 1.)	$V_{I/O}$	1,500	Vrms	AC for 1 min
Operating temperature	T_a	-20 to +85	$^{\circ}\text{C}$	With no icing or condensation	
Storage temperature	T_{stg}	-40 to +125	$^{\circ}\text{C}$	With no icing or condensation	
Soldering temperature (10 s)	---	260	$^{\circ}\text{C}$	10 s	

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions	
Input	LED forward voltage	V_F	1.0	1.15	1.3	V	$I_F = 10$ mA
	Reverse current	I_R	---	---	10	μ A	$V_R = 5$ V
	Capacity between terminals	C_I	---	15	---	pF	$V = 0$, $f = 1$ MHz
	Trigger LED forward current	I_{FI}	---	---	4	mA	$I_O = 100$ mA
Output	Maximum resistance with output ON	R_{ON}	---	5	8	Ω	$I_F = 5$ mA, $I_O = 160$ mA, $t < 1$ s
	Current leakage when the relay is open	I_{FAK}	---	---	1.0	nA	$V_{(ON)} = 20$ V, Ta = 50 $^{\circ}\text{C}$
	Capacity between terminals	C_{OUT}	---	1.0	2.5	pF	$V = 0$, $f = 100$ MHz, $t < 1$ s
Capacity between I/O terminals	$C_{I/O}$	---	0.8	---	pF	$f = 1$ MHz, $V_S = 0$ V	
Insulation resistance	$R_{I/O}$	1,000	---	---	M Ω	$V_{I/O} = 500$ VDC, $R_{OH} \leq 60\%$	
Turn-ON time	tON	---	---	0.5	ms	$I_F = 10$ mA, $R_L = 200$ Ω , $V_{DD} = 20$ V (See note 2.)	
Turn-OFF time	tOFF	---	---	0.5	ms		

Note: 2. Turn-ON and Turn-OFF Times



Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Output dielectric strength	V_{DD}	---	---	20	V
Operating LED forward current	I_F	7	---	30	mA
Continuous load current	I_O	---	---	160	mA
Operating temperature	T_a	25	---	60	$^{\circ}\text{C}$

Engineering Data

Load Current vs. Ambient Temperature

G3VM-21GR

