

FMA8012AS-M



80X80X16

0.60~1.028 M³/MIN

MATERIAL

Frame	Plastic PBT 94V0
Impeller	Plastic PBT 94V0
Lead Wire	AWG26 "+" Red "-" Black
	Standard JL 1007
Option	Signal output
Bearing	Sleeve Bearing

Dimensions in mm

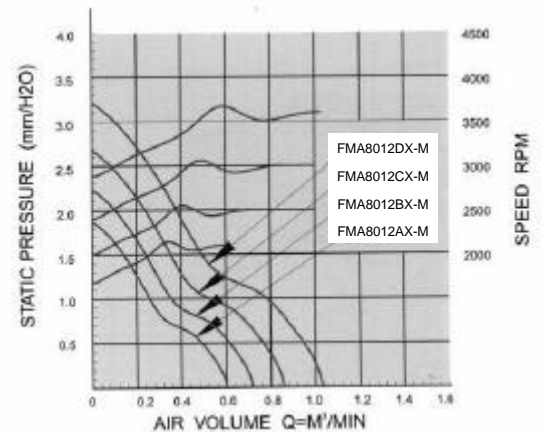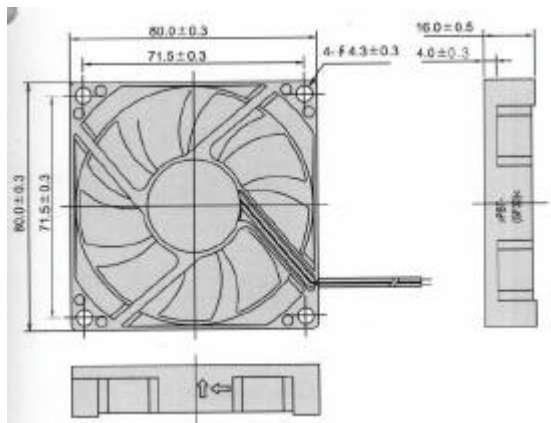

Model	FMA8012AS-M
Rated Voltage DCV	12
Operating Voltage DCV	6.0-13.8
Rated Input W	1.08
Rated Current A	0.12
Operating Temperature °C	-10~70
Storage Temperature °C	-40~70
Speed RPM	2100
Max, Air Flow M ³ /Min(CFM)	0.60(21.2)
Max, Air Pressure mmH ₂ O	1.88
Noise DB	29
Bearing	○
Weight (g)	APPROX.76

○: Sleevebearing