

Series 1064

- Short, compact size
- Board-to-board contacting
- For use in charging units

Mechanical Data	
Center	2.54 mm/100 mil
Full Travel	1.27 mm
Working Travel	up to 1.27 mm
Pre-loaded Spring Force	0.20/ 0.35/ 0.75 N
Spring Force at Working Travel	0.60/ 1.25/ 1.85 N

Electrical Data	
Max. Current Rating	5.0 A
Typical Continuity Resistance	<= 185 mOhm

Materials	
Barrel	Neusilber, unbeschichtet
Spring	Spring Steel, Stainless Steel, silver plated
Plunger	CuBe
Receptacle	Neusilber, unbeschichtet

Recommended Diameter of Drill	
HP 2361.1 (Trolitax)	1.70...1.75 mm
HGW 2372	1.70...1.75 mm

Tip style - Diameter - Plating




A	D	D	H	H
1.96C Au	1.96C Au	1.17C Au	1.96C Au	3.30C Au




H	H1	H1	H2
3.96C Au	1.57C Au	2.49C Au	1.96C Au


1064-A/1064-D




1064-H/1064-H1




1064-H2




H 1064 L



H 1064 C



H 1064 W

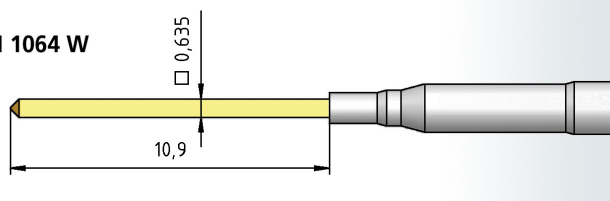

How to Order

1064	D	0.6 N	Au	1.96	C
1	2	3	4	5	6

1. Series 2. Tip Style 3. Spring Force
4. Tip Plating 5. Tip Diameter 6. Tip Material (only for CuBe)