


DIN Track Push-In Plus Terminal Blocks

XW5T-P

Push-In Plus Terminal Blocks to Downsize Control Panels and Save Wiring Work



- Push-in Plus terminal blocks are more compact than traditional screw terminal blocks.
- No loosening means maintenance-free application.
- Slim models available down to a width of 3.5 mm to help downsize control panels.
- Light insertion force and strong holding strength to achieve both less wiring work and high reliability.
- 'Hand-free' structure that holds an inserted screwdriver to achieve easier wiring work.

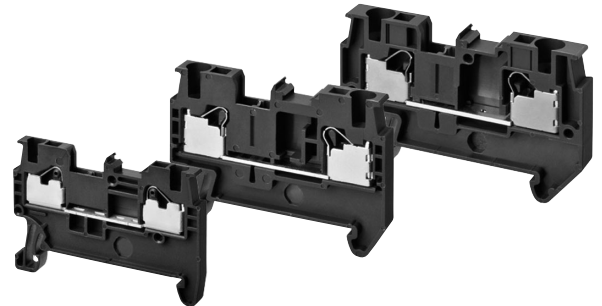

For the most recent information on models that have been certified for safety standards, refer to your OMRON website.



Refer to *Safety Precautions* on page 8.

Model Number Legend

Feed Through Terminal Blocks

XW5T - P□-□-□□
(1) (2) (3)(4)

(1) **Maximum Applicable Stranded Wire**
1.5: 1.5mm²
2.5: 2.5mm²
4.0: 4.0mm²

(2) **Wiring**
1.1: 1:1
1.2: 1:2
2.2: 2:2

Grounding Terminal Blocks

XW5G - P□-□-□
(1) (2) (3)

(3) **Number of Tiers**
1: 1 tier
2: 2 tiers

(4) **Color**
Blank: Dark gray
BL: Blue

XW5T-P

Ordering Information

Product type	Applicable wire sizes	Applicable wire sizes with ferrules attached	Color	Wiring	Tiers	Model	
Feed Through Terminal Blocks	0.08 mm ² to 1.5 mm ² AWG 28 to AWG 14	0.14 mm ² to 1.0 mm ² AWG 26 to AWG 18	Dark gray	1:1	1 tier	XW5T-P1.5-1.1-1	
				1:2		XW5T-P1.5-1.2-1	
				2:2		XW5T-P1.5-2.2-1	
			Blue	1:1	2 tiers	XW5T-P1.5-1.1-2	
				1:1		XW5T-P1.5-1.1-1BL	
				1:2		XW5T-P1.5-1.2-1BL	
	0.14 mm ² to 4.0 mm ² AWG 26 to AWG 12	0.14 mm ² to 2.5 mm ² AWG 26 to AWG 14	Dark gray	1:1	1 tier	XW5T-P2.5-1.1-1	
			Blue	1:1	1 tier	XW5T-P2.5-1.1-1BL	
	0.2 mm ² to 6.0 mm ² AWG 24 to AWG 10	0.2 mm ² to 4.0 mm ² AWG 24 to AWG 12	Dark gray	1:1	1 tier	XW5T-P4.0-1.1-1	
			Blue	1:1	1 tier	XW5T-P4.0-1.1-1BL	
	Grounding Terminal Blocks	0.08 mm ² to 1.5 mm ² AWG 28 to AWG 14	0.14 mm ² to 1.0 mm ² AWG 26 to AWG 18	Green/yellow	1:1	1 tier	XW5G-P1.5-1.1-1
					1:2		XW5G-P1.5-1.2-1
2:2					XW5G-P1.5-2.2-1		
0.14 mm ² to 4.0 mm ² AWG26 to AWG 12		0.14 mm ² to 2.5 mm ² AWG 26 to AWG 14	1:1		2 tiers	XW5G-P1.5-1.1-2	
			1:1		1 tier	XW5G-P2.5-1.1-1	
			1:1		1 tier	XW5G-P4.0-1.1-1	
0.2 mm ² to 6.0 mm ² AWG 24 to AWG 10	0.12 mm ² to 4.0 mm ² AWG 24 to AWG 12	1:1	1 tier				

Accessories

Short Bars

For XW5T-P1.5-□ or XW5G-P1.5-□

No. of poles	Colors	Model
2	Red (RD) Blue(BL) Yellow (YL)	XW5S-P1.5-2□□
3		XW5S-P1.5-3□□
4		XW5S-P1.5-4□□
5		XW5S-P1.5-5□□
10		XW5S-P1.5-10□□

For XW5T-P2.5-□ or XW5G-P2.5-□

No. of poles	Colors	Model
2	Red (RD) Blue(BL) Yellow (YL)	XW5S-P2.5-2□□
3		XW5S-P2.5-3□□
4		XW5S-P2.5-4□□
5		XW5S-P2.5-5□□
10		XW5S-P2.5-10□□

For XW5T-P4.0-□ or XW5G-P4.0-□

No. of poles	Colors	Model
2	Red (RD) Blue(BL) Yellow (YL)	XW5S-P4.0-2□□
3		XW5S-P4.0-3□□
4		XW5S-P4.0-4□□
5		XW5S-P4.0-5□□
10		XW5S-P4.0-10□□

Labels

Applicable Terminal Blocks	Model	Description
XW5T-P1.5-□	XW5Z-P1.5LB1	For Top 1 sheet (102 pieces)
	XW5Z-P1.5LB2	For Side 1 sheet (108 pieces)
XW5T-P2.5-□	XW5Z-P2.5LB1	For Top 1 sheet (72 pieces)
	XW5Z-P2.5LB2	For Side 1 sheet (72 pieces)
XW5T-P4.0-□	XW5Z-P4.0LB1	For Top 1 sheet (60 pieces)
	XW5Z-P4.0LB2	For Side 1 sheet (60 pieces)

End Cover

Applicable Terminal Blocks	Model
XW5□-P1.5-1.1-1	XW5E-P1.5-1.1-1
XW5□-P1.5-1.1-2	XW5E-P1.5-1.1-2
XW5□-P1.5-1.2-1	XW5E-P1.5-1.2-1
XW5□-P1.5-2.2-1	XW5E-P1.5-2.2-1
XW5□-P2.5-1.1-1	XW5E-P2.5-1.1-1
XW5□-P4.0-1.1-1	XW5E-P4.0-1.1-1

End Brackets/Separator Plates







Name	Width (mm)	Model
End Brackets	6	XW5Z-EP6
Separator Plates	12	XW5Z-EP12

Ratings and Performance

Feed Through Terminal Blocks

	1 tier, 1:1				1 tier, 1:1				1 tier, 1:1			
Appearance and internal wiring												
Applicable wire sizes	0.08 to 1.5 mm ² (Stranded wires: 0.08 to 1.5 mm ² , Solid wire: 0.14 to 1.5 mm ²) AWG28 to AWG14				0.14 to 4.0 mm ² (Stranded wires: 0.14 to 2.5 mm ² , Solid wire: 0.14 to 4.0 mm ²) AWG26 to AWG12				0.2 to 6.0 mm ² (Stranded wires: 0.2 to 4.0 mm ² , Solid wire: 0.2 to 6.0 mm ²) AWG24 to AWG10			
Model	XW5T-P1.5-1.1-1(BL)				XW5T-P2.5-1.1-1(BL)				XW5T-P4.0-1.1-1(BL)			
Dimensions	3.5x45x30.5				5.2x48.8x35.25				6.2x56.1x35.25			
IEC rated voltage	500 V				800 V							
IEC rated current	17.5 A/1.5 mm ² (SOL), 13.5 A/1.0 mm ² (STR)				24 A/2.5 mm ² (SOL), 17.5 A/1.5 mm ² (STR)				32 A/4.0 mm ² (SOL), 24 A/2.5 mm ² (STR)			
Usage Group (UG)	B, C		D		B, C							
UL rated voltage	300 V		51-150 V		151-300 V		301-600 V		600 V			
UL rated current	15 A (SOL), 10 A (STR)		15 A (SOL), 10 A (STR)		10 A		5 A		20 A/AWG12 (SOL), 15 A/AWG14 (STR)		30 A/AWG10 (SOL), 20 A/AWG12 (STR)	
Dielectric strength	1,890 VAC for 1 min (leakage current: 1 mA max.)				2,000 VAC for 1 min (leakage current: 1 mA max.)							
Operating temperature range	-40 to 55°C (with no condensation or icing)											
Operating humidity range	5% to 95%											
Compliant standards	cULus (UL 1059) and IEC 60947-7-1											
Insertion durability	50 times											
Vibration resistance	10 to 150 Hz Acceleration 50m/s ² for 80 min each in X, Y, and Z directions											
Shock resistance	500 m/s ² 11 ms, each in 6 directions 5 times											
End Cover	XW5E-P1.5-1.1-1				XW5E-P2.5-1.1-1				XW5E-P4.0-1.1-1			
Special tool	XW4Z-00B											
Applicable nameplates	XW5Z-P1.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness				XW5Z-P2.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness				XW5Z-P4.0LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness			
Applicable Short Bars	XW5S-P1.5-□ (□: Poles = 2, 3, 4, 5 or 10)				XW5S-P2.5-□ (□: Poles = 2, 3, 4, 5 or 10)				XW5S-P4.0-□ (□: Poles = 2, 3, 4, 5 or 10)			
Weight	Approx. 3.3 g				Approx. 6.3 g				Approx. 8.2 g			
	2 tiers, 1:1				1 tier, 1:2				1 tier, 2:2			
Appearance and internal wiring												
Applicable wire sizes	0.08 to 1.5 mm ² (Stranded wires: 0.08 to 1.5 mm ² , Solid wire: 0.14 to 1.5 mm ²) AWG28 to AWG14											
Model	XW5T-P1.5-1.1-2(BL)				XW5T-P1.5-1.2-1(BL)				XW5T-P1.5-2.2-1(BL)			
Dimensions	3.5x65.7x41.1				3.5x54.1x30.5				3.5x63.2x30.5			
IEC rated voltage	500 V											
IEC rated current	17.5 A/1.5 mm ² (SOL), 13.5 A/1.0 mm ² (STR)											
Usage Group (UG)	B, C		D		B, C							
UL rated voltage	300 V		51-150 V		151-300 V		301-600 V		600 V			
UL rated current	15 A (SOL), 10 A (STR)		15 A (SOL), 10 A (STR)		10 A		5 A					
Dielectric strength	1,890 VAC for 1 min (leakage current: 1 mA max.)											
Operating temperature range	-40 to 55°C (with no condensation or icing)											
Operating humidity range	5% to 95%											
Compliant standards	cULus (UL 1059) and IEC 60947-7-1											
Insertion durability	50 times											
Vibration resistance	10 to 150 Hz Acceleration 50m/s ² for 80 min each in X, Y, and Z directions											
Shock resistance	500 m/s ² 11 ms, each in 6 directions 5 times											
End Cover	XW5E-P1.5-1.1-2				XW5E-P1.5-1.2-1				XW5E-P1.5-2.2-1			
Special tool	XW4Z-00B											
Applicable nameplates	XW5Z-P1.5LB2				XW5Z-P1.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness							
Applicable Short Bars	XW5S-P1.5-□ (□: Poles = 2, 3, 4, 5 or 10)											
Weight	Approx. 6.6 g				Approx. 4.1 g				Approx. 4.8 g			

Grounding Terminal Blocks

Appearance and internal wiring	1 tier, 1:1 	1 tier, 1:1 	1 tier, 1:1 
	Applicable wire sizes	0.08 to 1.5 mm ² (Stranded wires: 0.08 to 1.5 mm ² , Solid wire: 0.14 to 1.5 mm ²) AWG28 to AWG14	0.14 to 4.0 mm ² (Stranded wires: 0.14 to 2.5 mm ² , Solid wire: 0.14 to 4.0 mm ²) AWG26 to AWG12
Model	XW5G-P1.5-1.1-1	XW5G-P2.5-1.1-1	XW5G-P4.0-1.1-1
Dimensions	3.5x45x30.5	5.2x48.8x35.25	6.2x56.1x35.25
IEC rated voltage	500 V	800 V	
Operating temperature range	-40 to 55°C (with no condensation or icing)		
Operating humidity range	5% to 95%		
Compliant standards	cULus (UL 1059) and IEC 60947-7-2		
Insertion durability	50 times		
Vibration resistance	10 to 150 Hz Acceleration 50m/s ² for 80 min each in X, Y, and Z directions		
Shock resistance	500 m/s ² 11 ms, each in 6 directions 5 times		
End Cover	XW5E-P1.5-1.1-1	XW5E-P2.5-1.1-1	XW5E-P4.0-1.1-1
Special tool	XW4Z-00B		
Applicable nameplates	XW5Z-P1.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness	XW5Z-P2.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness	XW5Z-P4.0LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness
Applicable Short Bars	XW5S-P1.5-□ (□: Poles = 2, 3, 4, 5 or 10)	XW5S-P2.5-□ (□: Poles = 2, 3, 4, 5 or 10)	XW5S-P4.0-□ (□: Poles = 2, 3, 4, 5 or 10)
Weight	Approx. 4.7 g	Approx. 9.9 g	Approx. 11.7 g
Appearance and internal wiring	2 tiers, 1:1 	1 tier, 1:2 	1 tier, 2:2 
	Applicable wire sizes	0.08 to 1.5 mm ² (Stranded wires: 0.08 to 1.5 mm ² , Solid wire: 0.14 to 1.5 mm ²) AWG28 to AWG14	
Model	XW5G-P1.5-1.1-2	XW5G-P1.5-1.2-1	XW5G-P1.5-2.2-1
Dimensions	3.5x65.7x41.1	3.5x54.1x30.5	3.5x63.2x30.5
IEC rated voltage	500 V		
Operating temperature range	-40 to 55°C (with no condensation or icing)		
Operating humidity range	5% to 95%		
Compliant standards	cULus (UL 1059) and IEC 60947-7-2		
Insertion durability	50 times		
Vibration resistance	10 to 150 Hz Acceleration 50m/s ² for 80 min each in X, Y, and Z directions		
Shock resistance	500 m/s ² 11 ms, each in 6 directions 5 times		
End Cover	XW5E-P1.5-1.1-2	XW5E-P1.5-1.2-1	XW5E-P1.5-2.2-1
Special tool	XW4Z-00B		
Applicable nameplates	XW5Z-P1.5LB2	XW5Z-P1.5LB□ or commercially available nameplate with 9.5 mm width and 0.5 mm thickness	
Applicable Short Bars	XW5S-P1.5-□ (□: Poles = 2, 3, 4, 5 or 10)		
Weight	Approx. 8.2 g	Approx. 5.5 g	Approx. 6.3 g

Short Bars


Model	XW5S-P1.5-□	XW5S-P2.5-□	XW5S-P4.0-□
Rated voltage	500 V	800 V	
Rated current	17.5 A	24 A	32 A

Dimensions


(Unit: mm)

DIN Track Terminal Blocks


XW5T-P1.5-1.1-1(BL)/XW5G-P1.5-1.1-1

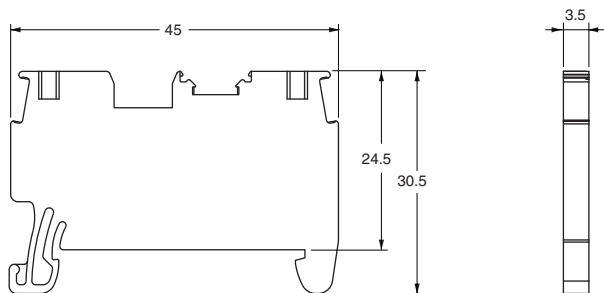


XW5T-P2.5-1.1-1(BL)/XW5G-P2.5-1.1-1

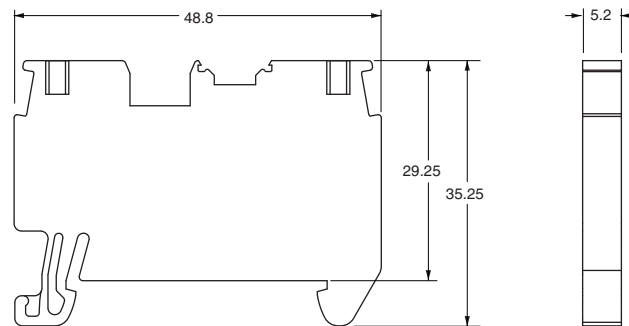


XW5T-P1.5-1.2-1(BL)/XW5G-P1.5-1.2-1

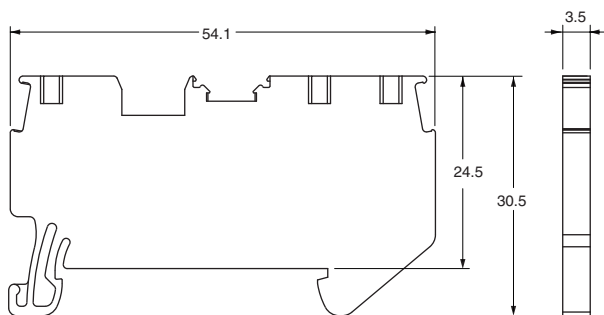


XW5T-P4.0-1.1-1(BL)/XW5G-P4.0-1.1-1

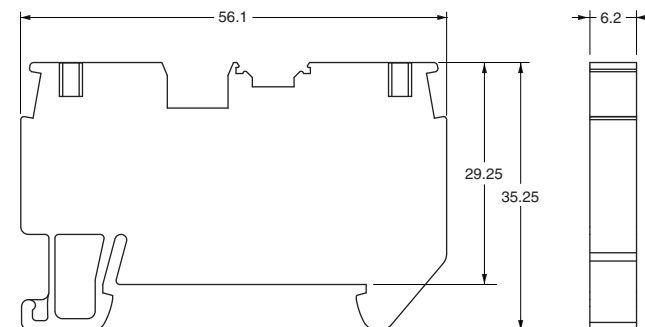

XW5T-P1.5-2.2-1(BL)/XW5G-P1.5-2.2-1

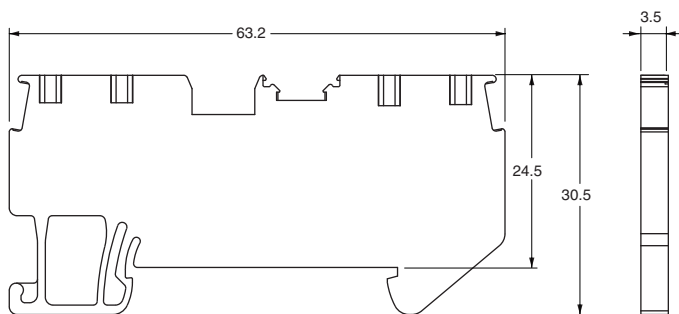


XW5T-P1.5-1.1-2(BL)/XW5G-P1.5-1.1-2

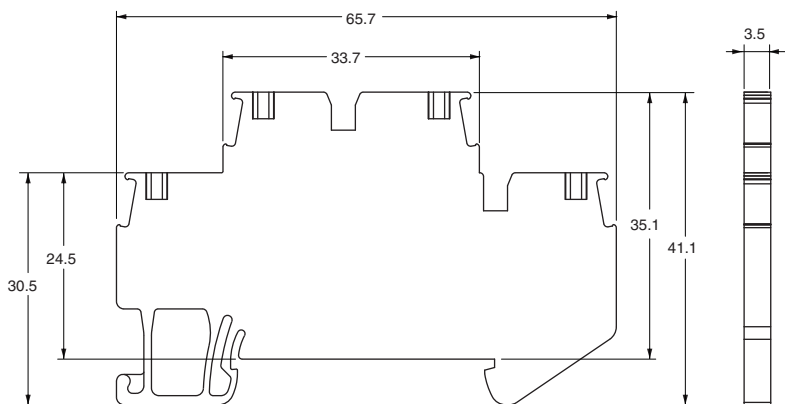

XW5T-P


Short Bars

XW5S-P1.5-□

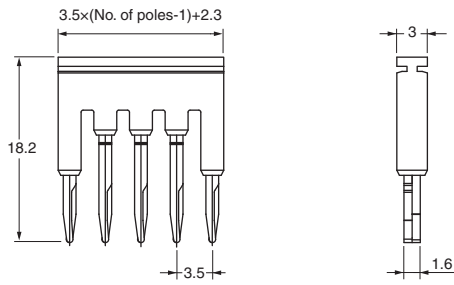


Model	P (mm)
XW5S-P1.5-2□	3.5
XW5S-P1.5-3□	7
XW5S-P1.5-4□	10.5
XW5S-P1.5-5□	14
XW5S-P1.5-10□	31.5

XW5S-P2.5-□

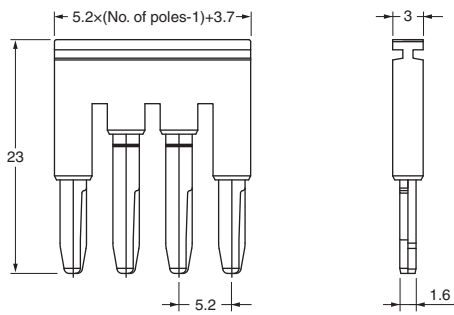

Model	P (mm)
XW5S-P2.5-2□	5.2
XW5S-P2.5-3□	10.4
XW5S-P2.5-4□	15.6
XW5S-P2.5-5□	20.8
XW5S-P2.5-10□	46.8


XW5S-P4.0-□

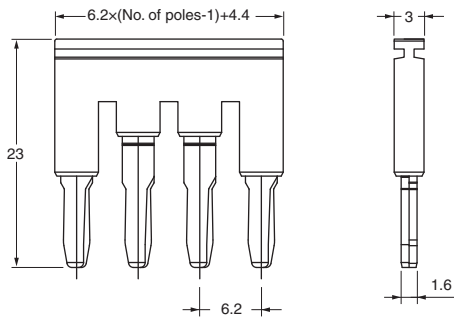


Model	P (mm)
XW5S-P4.0-2□	6.2
XW5S-P4.0-3□	12.4
XW5S-P4.0-4□	18.6
XW5S-P4.0-5□	24.8
XW5S-P4.0-10□	55.8

End Cover


XW5E-P1.5-1.1-1

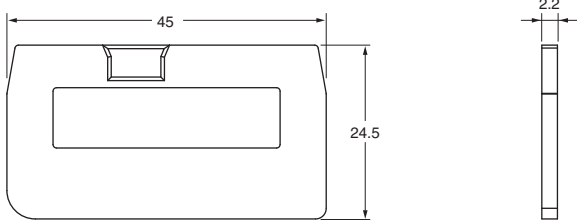


XW5E-P2.5-1.1-1

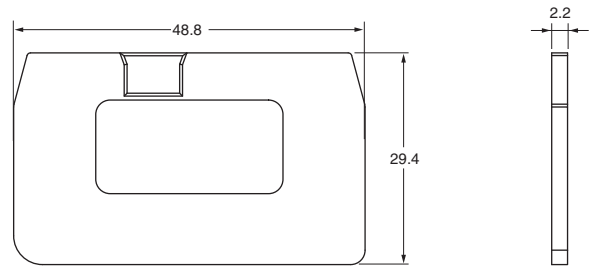


XW5E-P1.5-1.2-1

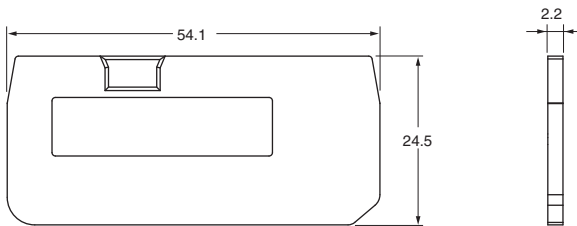


XW5E-P4.0-1.1-1

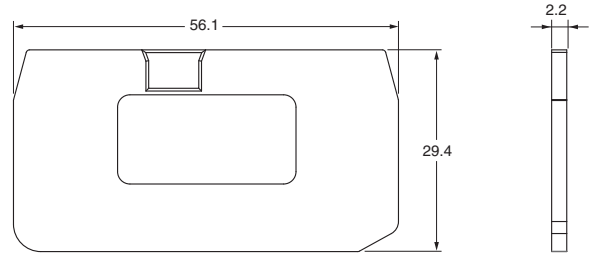

XW5E-P1.5-2.2-1

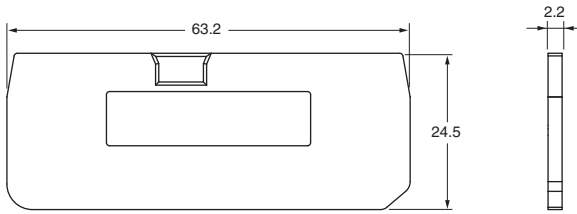


XW5E-P1.5-1.1-2

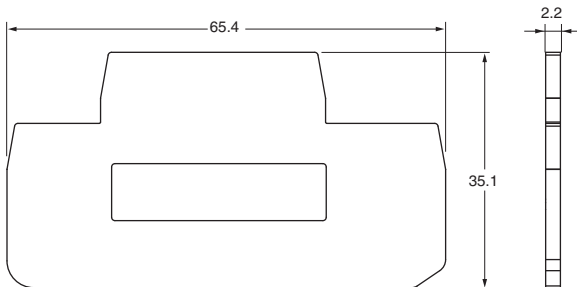


End Brackets/Separator Plates

XW5Z-EP6 (End Brackets)

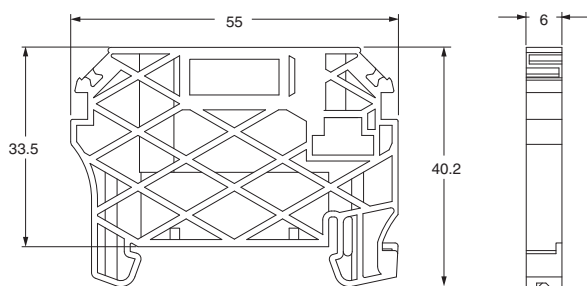

XW5Z-EP12 (Separator Plates)

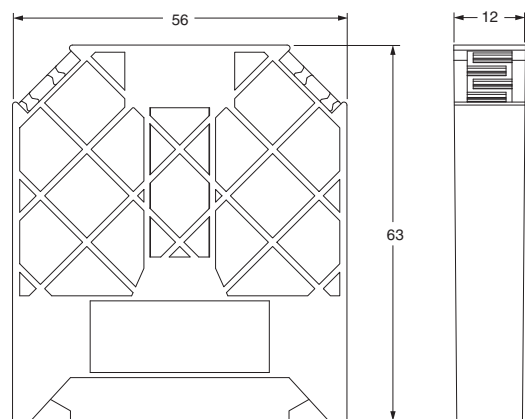

Safety Precautions

Warning Indications

Precautions for Safe Use	Supplementary comments on what to do or avoid doing, to use the product safely.
Precautions for Correct Use	Supplementary comments on what to do or avoid doing, to prevent failure to operate, malfunction, or undesirable effects on product performance.

Precautions for Safe Use

- Do not wire anything to the release holes.
- Do not tilt or twist a flat-blade screwdriver while it is inserted into a release hole on the terminal block. The terminal block may be damaged.
- Insert a flat-blade screwdriver into the release holes at an angle. The terminal block may be damaged if you insert the screwdriver straight in.
- Do not allow the flat-blade screwdriver to fall out while it is inserted into a release hole.
- Do not bend a wire past its natural bending radius or pull on it with excessive force. Doing so may cause the wire disconnection.
- Do not insert more than one wire into each terminal insertion hole.
- Do not install the Terminal Block upside down when mounting multiple Terminal Blocks. Doing so may cause short circuits with the adjacent Terminal Block.
- To prevent wiring materials from smoking or ignition, use the wiring materials given in the following table.

	Recommended Wire	Stripping length	
		With Ferrules	Without Ferrules
XW5T-P1.5-□-□□	0.08 to 1.5 mm ² / AWG 28 to 14	8 mm	8 mm
XW5T-P2.5-□-□□	0.25 to 4 mm ² / AWG 24 to 12	10 mm	10 mm
XW5T-P4.0-□-□□	0.25 to 6 mm ² / AWG 24 to 10	12 mm	12 mm

Note: Please use Ferrules with UL certification (R/C).


Precautions for Correct Use

1. Precautions for Correct Use

- Do not drop the Terminal Block. Terminal Block functionality may be inhibited.
- Always attach End Cover. Not doing so may cause electrical shock.
- When you wire the Terminal Block, do not subject it or the wires to stress. Secure the wires so that they do not resonate with vibrations from the facilities in installation conditions.
- Always turn OFF the power supply before wiring. Electrical shock may occur.

2. Connecting Wires to the Push-In Plus Terminal Block


Part Names of the Terminal Block

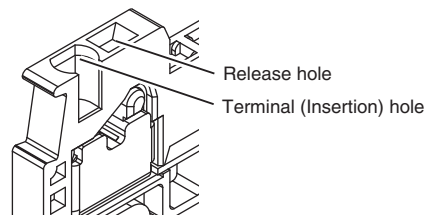

Connecting Wires with Ferrules

Insert the ferrule straight into the terminal block until the end strikes the terminal block.


If a wire is difficult to connect because it is too thin, use a flat-blade screwdriver in the same way as when connecting stranded wire.

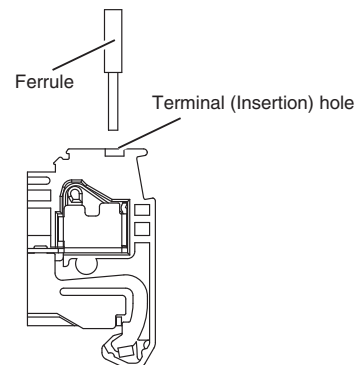

Connecting Stranded Wires


Use the following procedure to connect the wires to the terminal block.

- Hold a flat-blade screwdriver at an angle and insert it into the release hole. The angle should be between 10° and 15°. If the flat-blade screwdriver is inserted correctly, you will feel the spring in the release hole respond.
- With the flat-blade screwdriver still inserted into the release hole, insert the wire into the terminal hole until it strikes the terminal block.
- Remove the flat-blade screwdriver from the release hole.

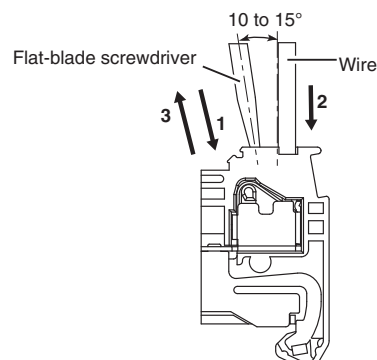

Checking Connections


- After the insertion, pull gently on the wire to make sure that it will not come off and the wire is securely fastened to the terminal block.
- To prevent short circuits, insert the stripped part of a stranded or solid wire or the conductor part of a ferrule until it is hidden inside the terminal insertion hole. (See the following diagram.)



3. Removing Wires from the Push-In Plus Terminal Block

Use the following procedure to remove wires from the terminal block. The same method is used to remove stranded wires, solid wires, and ferrules.

1. Hold a flat-blade screwdriver at an angle and insert it into the release hole.
2. With the flat-blade screwdriver still inserted into the release hole, remove the wire from the terminal insertion hole.
3. Remove the flat-blade screwdriver from the release hole.

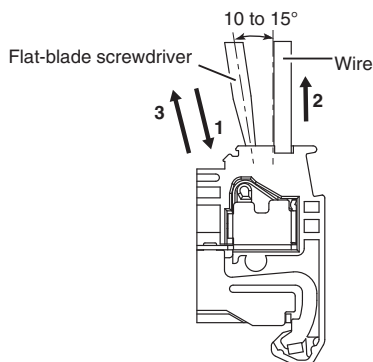

4. Recommended Ferrules and Crimp Tools

Recommended Ferrules

XW5T-P1.5-□-□□

Applicable wire		Ferrule Conductor length (mm)	Recommended ferrules		
(mm ²)	(AWG)		Manufactured by Phoenix Contact	Manufactured by Weidmuller	Manufactured by Wago
0.14	26	8	Al 0.14-8	H0.14/12	---
0.25	24	8	Al 0.25-8	H0.25/12	FE-0.25-8N-YE
0.34	22	8	Al 0.34-8	H0.34/12	FE-0.34-8N-TQ
0.50	20	8	Al 0.5-8	H0.5/14	FE-0.5-8N-WH
0.75	18	8	Al 0.75-8	H0.75/14	FE-0.75-8N-GY
1.00	18	8	Al 1-8	H1.0/14	FE-1.0-8N-RD
Recommended crimp tool			CRIMPFOX6 CRIMPFOX6-F CRIMPFOX10S	PZ6 roto	Variocrimp4


XW5T-P2.5-□-□□

Applicable wire		Ferrule Conductor length (mm)	Recommended ferrules		
(mm ²)	(AWG)		Manufactured by Phoenix Contact	Manufactured by Weidmuller	Manufactured by Wago
0.25	24	10	Al 0.25-10 YE	---	---
0.34	22	10	Al 0.34-10 TQ	---	---
0.50	20	10	Al 0.5-10 WH	H0.5/16	FE-0.5-10N-WH
0.75	18	10	Al 0.75-10 GY	H0.75/16	FE-0.75-10N-GY
1.00	18	10	Al 1-10 RD	H1.0/16	FE-1.0-10N-RD
1.50	16	10	Al 1.5-10 BK	H1.5/16	FE-1.5-10N-BK
2.50	14	10	Al 2.5-10 BU	H2.5/16DS	FE-2.5-10N-BU
Recommended crimp tool			CRIMPFOX6 CRIMPFOX6-F CRIMPFOX10S	PZ6 roto	Variocrimp4

XW5T-P4.0-□-□□

Applicable wire		Ferrule Conductor length (mm)	Recommended ferrules		
(mm ²)	(AWG)		Manufactured by Phoenix Contact	Manufactured by Weidmuller	Manufactured by Wago
0.25	24	12	Al 0.25-12 BU	---	---
0.34	22	12	Al 0.34-12 TQ	---	---
0.50	20	12	Al 0.5-12 WH	---	FE-0.5-12N-WH
0.75	18	12	Al 0.75-12 GY	H0.75/18	FE-0.75-12N-GY
1.00	18	12	Al 1-12 RD	H1.0/18	FE-1.0-12N-RD
1.50	16	12	Al 1.5-12 BK	H1.5/18D	FE-1.5-12N-BK
2.50	14	12	Al 2.5-12 BU	H2.5/19D	FE-2.5-12N-BU
4.00	12	12	Al 4-12 GY	H4.0/20D	FE-4.0-12N-GY
Recommended crimp tool			CRIMPFOX6 CRIMPFOX6-F CRIMPFOX10S	PZ6 roto	Variocrimp4

- Note:**
1. Make sure that the outer diameter of the wire is smaller than the inner diameter of the insulation sleeve of the recommended ferrule.
 2. Make sure that the ferrule processing dimensions conform to the following figure.




Recommended Flat-blade Screwdriver

Use a flat-blade screwdriver to connect and remove wires.

Use the following flat-blade screwdriver.

The following table shows manufacturers and models as of 2015/Dec.




Model	Manufacturer
XW4Z-00B	Omron
ESD0.40×2.5	Wera
SZF 0.4×2.5	Phoenix Contact
0.4×2.5×75 302	Wiha
AEF.2.5×75	Facom
210-719	Wago
SDI 0.4×2.5×75	Weidmuller

5. Mounting to DIN Track/Removing from DIN Track


Mounting Method

To mount a Terminal Block to a DIN Track, press it against the DIN Track as shown in the following figure.



Removal Method

To remove a Terminal Block from the DIN Track, catch the tip of a screwdriver in the hook, operate the screwdriver so that the tip moves in direction (1), and then remove the Terminal Block in direction (2). However, do not apply excessive force to the Terminal Block. Doing so may damage it.

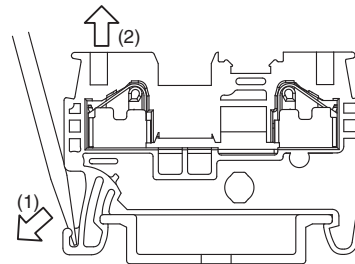

6. Storage

Store the Terminal Block within the following temperature range.
-40 to 85°C (with no condensation or icing)

Terms and Conditions of Sale

1. **Offer; Acceptance.** These terms and conditions (these "**Terms**") are deemed part of all quotes, agreements, purchase orders, acknowledgments, price lists, catalogs, manuals, brochures and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "**Products**") by Omron Electronics LLC and its subsidiary companies ("**Omron**"). Omron objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
2. **Prices; Payment Terms.** All prices stated are current, subject to change without notice by Omron. Omron reserves the right to increase or decrease prices on any unshipped portions of outstanding orders. Payments for Products are due net 30 days unless otherwise stated in the invoice.
3. **Discounts.** Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Omron's payment terms and (ii) Buyer has no past due amounts.
4. **Interest.** Omron, at its option, may charge Buyer 1-1/2% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
5. **Orders.** Omron will accept no order less than \$200 net billing.
6. **Governmental Approvals.** Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
7. **Taxes.** All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Omron or required to be collected directly or indirectly by Omron for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Omron.
8. **Financial.** If the financial position of Buyer at any time becomes unsatisfactory to Omron, Omron reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Omron may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
9. **Cancellation; Etc.** Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Omron against all related costs or expenses.
10. **Force Majeure.** Omron shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
11. **Shipping; Delivery.** Unless otherwise expressly agreed in writing by Omron:
 - a. Shipments shall be by a carrier selected by Omron; Omron will not drop ship except in "break down" situations.
 - b. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
 - c. All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Omron), at which point title and risk of loss shall pass from Omron to Buyer; provided that Omron shall retain a security interest in the Products until the full purchase price is paid;
 - d. Delivery and shipping dates are estimates only; and
 - e. Omron will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
12. **Claims.** Any claim by Buyer against Omron for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Omron within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Omron in the condition claimed.
13. **Warranties.** (a) **Exclusive Warranty.** Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied. (b) **Limitations.** OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) **Buyer Remedy.** Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty. See <http://www.omron247.com> or contact your Omron representative for published information.
14. **Limitation on Liability; Etc.** OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.
15. **Indemnities.** Buyer shall indemnify and hold harmless Omron Companies and their employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Omron is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Omron and defend or settle any action brought against such Companies to the extent based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
16. **Property; Confidentiality.** Any intellectual property in the Products is the exclusive property of Omron Companies and Buyer shall not attempt to duplicate it in any way without the written permission of Omron. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Omron. All information and materials supplied by Omron to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
17. **Export Controls.** Buyer shall comply with all applicable laws, regulations and licenses regarding (i) export of products or information; (ii) sale of products to "forbidden" or other proscribed persons; and (iii) disclosure to non-citizens of regulated technology or information.
18. **Miscellaneous.** (a) **Waiver.** No failure or delay by Omron in exercising any right and no course of dealing between Buyer and Omron shall operate as a waiver of rights by Omron. (b) **Assignment.** Buyer may not assign its rights hereunder without Omron's written consent. (c) **Law.** These Terms are governed by the law of the jurisdiction of the home office of the Omron company from which Buyer is purchasing the Products (without regard to conflict of law principles). (d) **Amendment.** These Terms constitute the entire agreement between Buyer and Omron relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) **Severability.** If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) **Setoff.** Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) **Definitions.** As used herein, "including" means "including without limitation"; and "Omron Companies" (or similar words) mean Omron Corporation and any direct or indirect subsidiary or affiliate thereof.

Certain Precautions on Specifications and Use

1. **Suitability of Use.** Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given: (i) Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document. (ii) Use in consumer products or any use in significant quantities. (iii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations. (iv) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Product. NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON'S PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
2. **Programmable Products.** Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.
3. **Performance Data.** Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.
4. **Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.
5. **Errors and Omissions.** Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

OMRON AUTOMATION AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE

México DF • 52.55.59.01.43.00 • 01-800-226-6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE

Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

OMRON EUROPE B.V. • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • +31 (0) 23 568 13 00 • www.industrial.omron.eu

Authorized Distributor:

Controllers & I/O

- Machine Automation Controllers (MAC) • Motion Controllers
- Programmable Logic Controllers (PLC) • Temperature Controllers • Remote I/O

Robotics

- Industrial Robots • Mobile Robots

Operator Interfaces

- Human Machine Interface (HMI)

Motion & Drives

- Machine Automation Controllers (MAC) • Motion Controllers • Servo Systems
- Frequency Inverters

Vision, Measurement & Identification

- Vision Sensors & Systems • Measurement Sensors • Auto Identification Systems

Sensing

- Photoelectric Sensors • Fiber-Optic Sensors • Proximity Sensors
- Rotary Encoders • Ultrasonic Sensors

Safety

- Safety Light Curtains • Safety Laser Scanners • Programmable Safety Systems
- Safety Mats and Edges • Safety Door Switches • Emergency Stop Devices
- Safety Switches & Operator Controls • Safety Monitoring/Force-guided Relays

Control Components

- Power Supplies • Timers • Counters • Programmable Relays
- Digital Panel Meters • Monitoring Products

Switches & Relays

- Limit Switches • Pushbutton Switches • Electromechanical Relays
- Solid State Relays

Software

- Programming & Configuration • Runtime