


# GKS-100 209 060 A 2000 LH

in product series GKS-100 LH



## Tip style

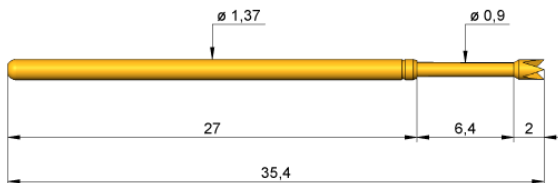

### General data

Order designation	GKS-100 209 060 A 2000 LH
Variant number	GKS-100-1549
Sub product group	Standard Stroke GKS
Series	GKS-100 LH Long version
Type of installation	plug-in
Quick-exchange system	yes
Installation height adjustable	no
Non-rotating	no
Magnetic	yes

### Mechanical data

Grid	2.54 mm
Total length	35.4 mm
Collar height	00
Probe barrel diameter	1.37 mm
Installation height without receptacle	0 mm
Working stroke	4.3 mm
Max. stroke	6.35 mm
Spring pre-load	0.66 N
Spring force at working stroke	2 N

### Electrical data

Current load capacity / rated current	5 A
Resistance (Ri typical)	20 mOhm

### Plunger head data

Tip style	09 flexi needle, self-cleaning
Tip style diameter	0,60 mm
Tip style material	2 Steel
Tip style surface	A Gold

### Operating temperature range

Temperature min.	-40 °C
Temperature max.	80 °C