

HEMOMATIK Sweden

Liquid level switch

Art.nr. HMCB-V

V=..... mm

Drawing nr. HMCB-V

Rev. 2

Approved H.S. 950120


Scale 1:2

Date 941129

Sign. MEM

Rev. date 180327

For switchpointmm, see label

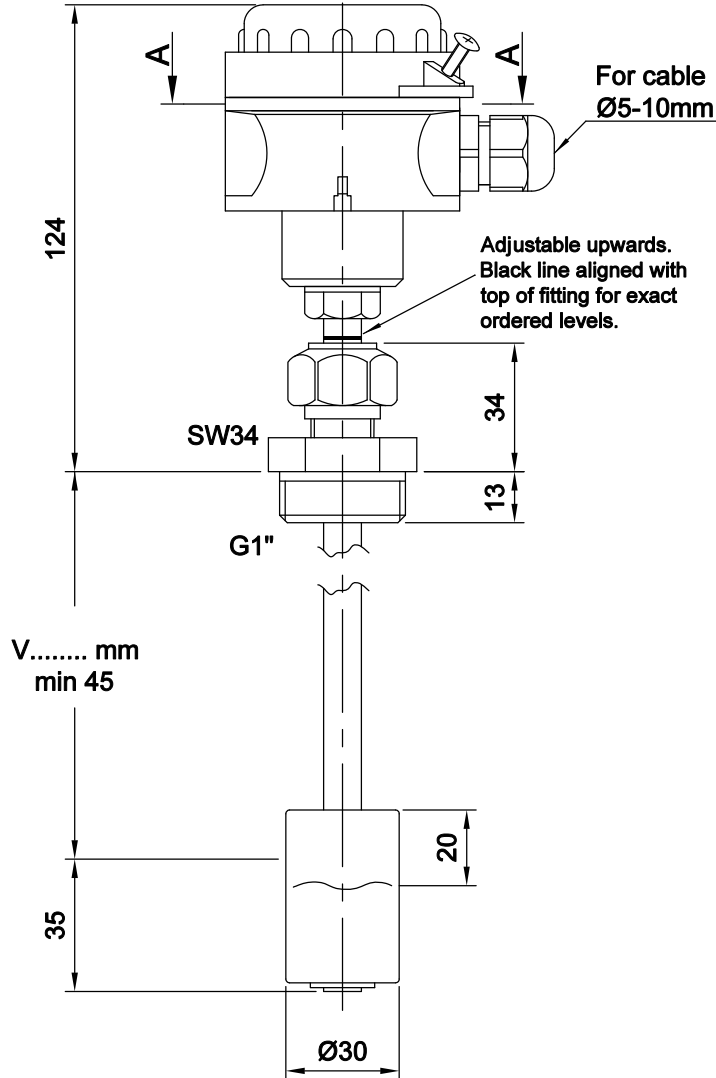

APPLICATION

For sensing off liquid levels to activate pumps or valves via relays or PCs, a floatswitch works equally well with conductive as with non-conductive fluids such as oils.

WORKING PRINCIPLE

The float contains a magnet. It follows the fluid along the stem. The stem is a non magnetic material with 1 to 5 built-in reedswitches. The magnet activates each reedswitch for aprox. 10 mm. This is called a passing switch. To assure that the contact status remains unchanged the stem is provided with a stop ring below respectively above the float. This allows to determine whether the level is rising or falling. We have chosen to define the contact status with empty tank and with the thread mounted in the upwards position.

MATERIALS

Stem : Brass
Float : BUNA-N (nitrofuel)
Fitting : Brass
Terminalbox : PA6
Temp. max : Oil +100°C

CONTACT SYMBOLS

V = change over

PROTECTION DEGREE

Junction box : IP67
Stem : IP68

INSTALLATION

Compression fitting is delivered not tightened. Decide and adjust level, once the nut is tightened the compression ring is firm on the stem.

ELECTRICAL DATA


Contact rating *	60 VA
max voltage	230 V
max current	1 A

* = resistive load

No ground = max 50 V

Note. Above values are for resistive loads. Mechanical life is 30 millions. Use series resistor for lamp load, or other suitable protection for inductive loads if the rating is higher than 1/10 of the values above.


Ground

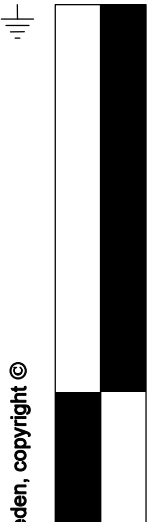

Rights to the design and drawing belongs to HEMOMATIK Sweden, copyright ©

■ = Switch closed

□ = Switch open

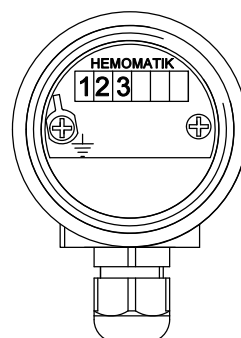

Section A-A