




Federkontaktstift TK 0050N
 Spring Contact Probe

Hülse S 0050N
 Receptacle

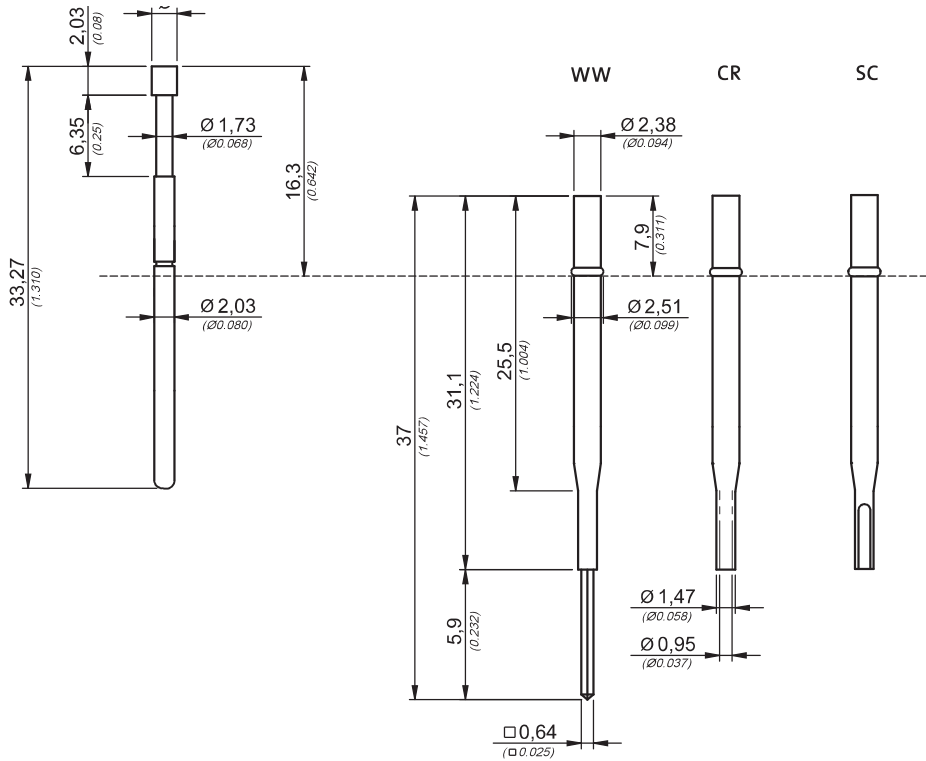

3:1

Serie Series TK0050 N					
Kopfform Head Type	Nr. No.	Tastkopf Ø mm Probe Tip Ø inch	Werkstoff Material	Federkraft Spring Force in cN	Oberfläche Tastkopf Surface Probe Tip
	A	2,54 0,10	C	Standard 120 cN	A
	B	1,73 0,068	C	Standard 4.0 oz.	A
	C	1,73 0,068	C		A
	D	2,54 0,10	C	Alternative 200 cN	A
	E	2,54 0,10	C	260 cN	A
	F	2,54 0,10	C	Alternative 7.0 oz. 9.0 oz.	A
	G	1,73 0,068	C		A
	H	2,54 0,10	C	+/- 20%	A
	J	1,73 0,068	C		A
	K	2,54 0,10	C		A

Technische Spezifikationen:
 Technical Specifications:

Max. Federweg Max. Travel	6,35 mm 0.25 inch
Arbeitshub Working Stroke	5,1 mm 0.201 inch
Nennstrom Current Rating	3 A
Mittlerer Durchgangswiderstand Average Resistance	$R_m = 15 \text{ m}\Omega$
Standardabweichung Standard Deviation	$s = 1,5 \text{ m}\Omega$

Werkstoffe:
 Materials:

Führungshülse Probe Barrel	Neusilber vergoldet Nickel silver gold plated
Feder Spring	Stahl vergoldet Steel gold plated
Kolben (Kopf) Plunger (Head)	CuBe (C) vergoldet (A) CuBe (C) gold plated (A)

Bestellbeispiel:
 Ordering Example:

Federkontaktstift
 Spring Contact Probe

TK0050N.	E.	2,54.	C.	120.	A
Serie Series	Kopfform Headtype	Tastkopf Probe tip	Werkstoff Material	Federkraft Springforce	Oberfläche Surface

Hülse Receptacle	S0050N.	SC
	Serie Series	Hülsenart Receptacle Type

TK0050N.E.2,54.C.120.A

S0050N.SC