



2002-12-16

## **PRODUKTINFORMATION**

**Vi reserverar oss mot fel samt förbehåller oss rätten till ändringar utan föregående meddelande**

**ELFA artikelnr**

**35-862-03 Säkerhetsbr XP2**

**35-863-02 Säkerhetsbr XPS42-E2**

# XP

## Momentary Switches

---

### XP

Characteristics	■ Long overtravel plunger ■ >3 mm contact gap ■ Reset spring option for increased reset security
Rating	Up to 400 VAC, 16 A
Dimensions (mm)	30 x 32 x 12
Actuator	Plain or mushroom plungers
Approvals	UL, CSA, ENEC



### Preferred Range


Ordering Reference	Actuating Force		Operating pos.		Terminal	Circuit	Actuator	Contacts	Electrical rating
XP2Z11	3.0 N	10.0 ozf	14.9 mm	0.587 in	Faston	CO	Straight plunger	Silver nickel	Up to 400 VAC, 16 A
XP4Z11	1.8 N	6.2 ozf	14.9 mm	0.587 in	Faston	NC	Straight plunger	Silver nickel	Up to 400 VAC, 16 A
XP5Z11	3.0 N	10.0 ozf	13.0 mm	0.511 in	Faston	NO	Straight plunger	Silver nickel	Up to 400 VAC, 16 A
XP2E1Z11	6.5 N	23.3 ozf	14.9 mm	0.587 in	Faston	CO	Mushroom plunger, reset	Silver nickel	Up to 400 VAC, 16 A
XP4E1Z11	3.8 N	13.4 ozf	14.9 mm	0.587 in	Faston	NC	Mushroom plunger, reset	Silver nickel	Up to 400 VAC, 16 A
XP5E1Z11	6.5 N	23.3 ozf	13.0 mm	0.511 in	Faston	NO	Mushroom plunger, reset	Silver nickel	Up to 400 VAC, 16 A
XP2E2Z11	3.0 N	10.0 ozf	14.9 mm	0.587 in	Faston	CO	Mushroom plunger, reset	Silver nickel	Up to 400 VAC, 16 A

# XP


## Specifications

■ Housing	Glass fibre reinforced nylon
■ Plunger	Glass fibre reinforced nylon
■ Mechanism	Change-over, normally open, normally closed
■ Contacts	Silver
■ Terminals	6.3 mm (0.25 in) faston (quick connect) - brass
■ Temperature range °C	-20°C to +85°C
■ Mechanical life	10 <sup>7</sup> cycles minimum (impact free actuation)
■ Protection	IP40 (enclosure)
■ Mounting	Screw mounting
■ Actuators	Straight or mushroom plunger
■ Special features	Optional reset spring for increased reset security

Circuit diagram



Dimensions

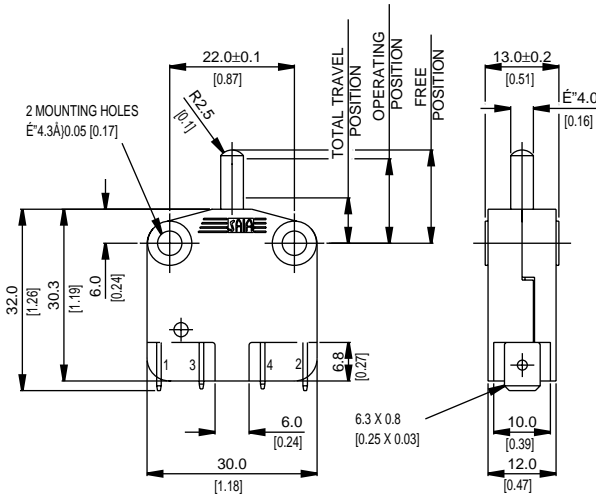

## Recommended maximum electrical ratings

Voltage (max)	Resistive load A	Inductive load	Horsepower	Approval
250 VAC	16 (0.75 pf)	-	-	UL 1054/CSA 22.2 No. 55 - 6,000 operations
125 VAC	-	-	¼ HP (0.45 pf)	UL 1054 - Horsepower- 6,000 operations
250 VAC	-	-	¼ HP (0.45 pf)	UL 1054 - Horsepower- 6,000 operations
250 VAC	16	6	-	EN.60158-1 T85 (°C) 50,000 operations
400 VAC	16	4	-	EN.60158-1 T85 (°C) 10,000 operations
0-15 VDC	10	-	-	General rating - 50,000 operations
15-30 VDC	7	-	-	General rating - 50,000 operations

