
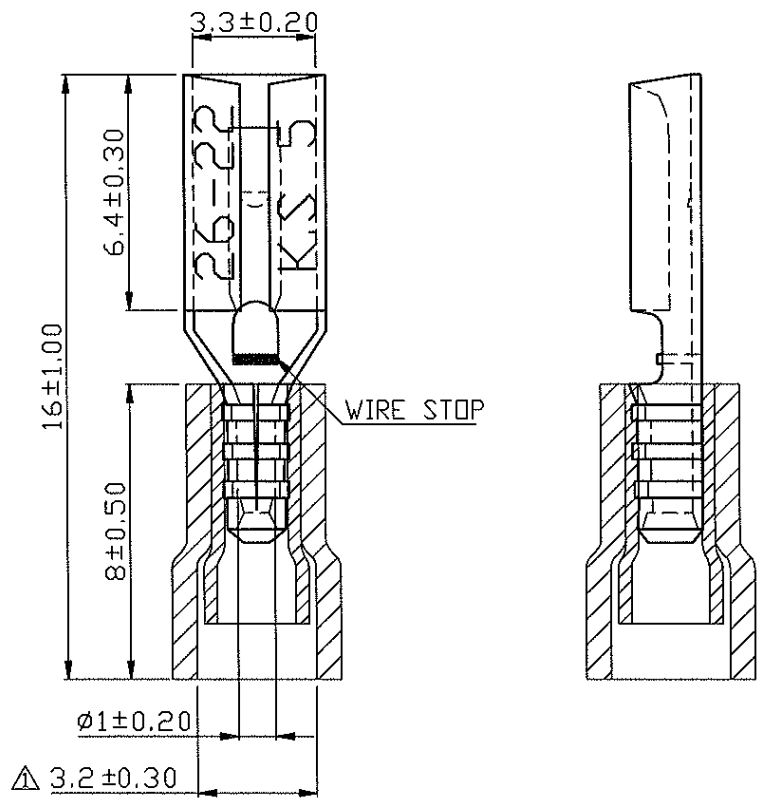


A B C D E F G H

REV	DESCRIPTION	DATE
△ RDK-97119		李冠忠 2008/06/20



- NOTE :
1. MAXIMUM ELECTRIC CURRENT : 

A.W.G.	26	24	22
AMP.	2	2	3
  2. MAXIMUM ELECTRICAL RATING : 75°C 300 VOLTS MAX.
  3. INSULATION MATERIAL : VINYL
  4. INSULATION COLOR : YELLOW
  5. TERMINAL MATERIAL : BRASS
  6. WIRE RANGE : 26-22 A.W.G. ( 0.2-0.5 mm<sup>2</sup> )
  3. NEMA TAB : 0.020 inch \* 0.110 inch (0.5 mm \* 2.80 mm )
  8. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
  9. TERMINAL SURFACE TREATMENT : TIN PLATED
  10. TERMINAL THICKNESS : 0.25 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF ±
18 > 30 mm ± 0.40	±
30 > 75 mm ± 0.50	±

NAME	VINYL-INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS			UNIT	
PART NO.	FDD0.5-110(5)	MATERIAL	-----	APPROVE	
NUMBER	KA-96452-C	SCALE	SHEET PAGE	CHECKED	
DATE	2007/03/12	5/1	1-1 10F2	DRAWN	張馨尹

**KST. K.S. TERMINALS INC.**

A B C D E F G H