
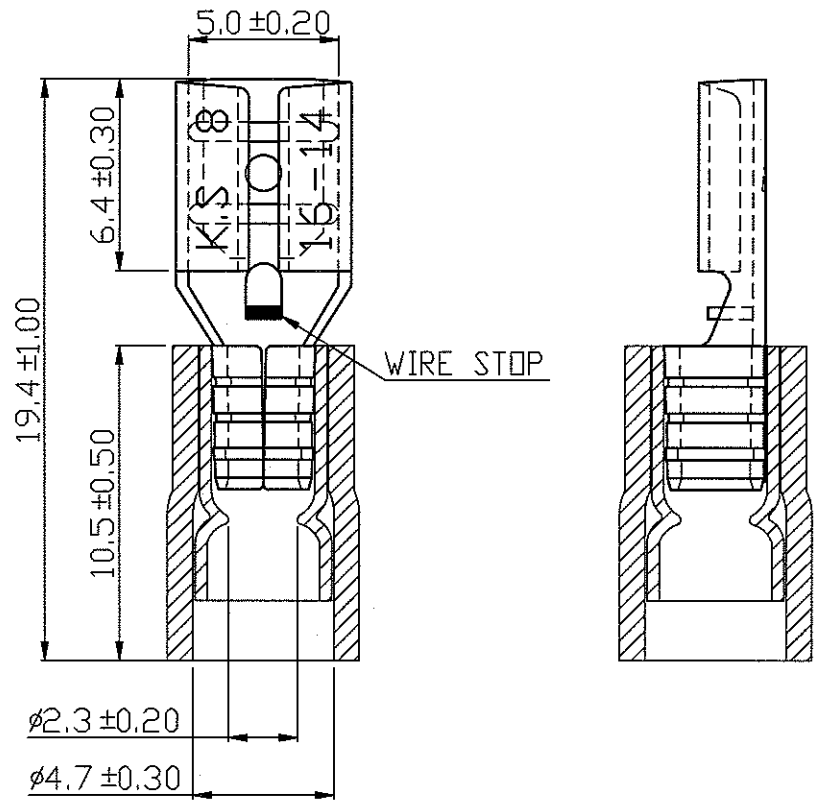


A B C D E F G H

REV	DESCRIPTION	DATE
△ RDK-96131		張馨尹 2008/01/03



- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14	
AMP.	10	15	
 2. MAXIMUM ELECTRICAL RATING : [△]105°C 600 VOLTS MAX.
 3. INSULATION MATERIAL : VINYL
 4. INSULATION COLOR : BLUE
 5. TERMINAL MATERIAL : BRASS
 6. WIRE RANGE : 16-14 A.W.G. (1.5-2.5 mm²)
 7. NEMA TAB : 0.032 inch * 0.187 inch (0.8 mm * 4.75 mm)
 8. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
 9. TERMINAL SURFACE TREATMENT : TIN PLATED
 10. TERMINAL THICKNESS : 0.35 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° REF ±
18 > 30 mm ± 0.40	±
30 > 75 mm ± 0.50	±

NAME	VINYL-INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS	UNIT	
PART NO.	FDD2-187(8)	MATERIAL	-----
NUMBER	KA-951312-C	SCALE	SHEET PAGE
DATE	2006/09/18	4/1	1-1 10F2
APPROVE		CHECKED	DRAWN
			謝婉如

KST. K.S. TERMINALS INC.

A B C D E F G H