


A B C D E F G H

REV	DESCRIPTION	DATE
-----	-------------	------

1
2
3
4
5
6

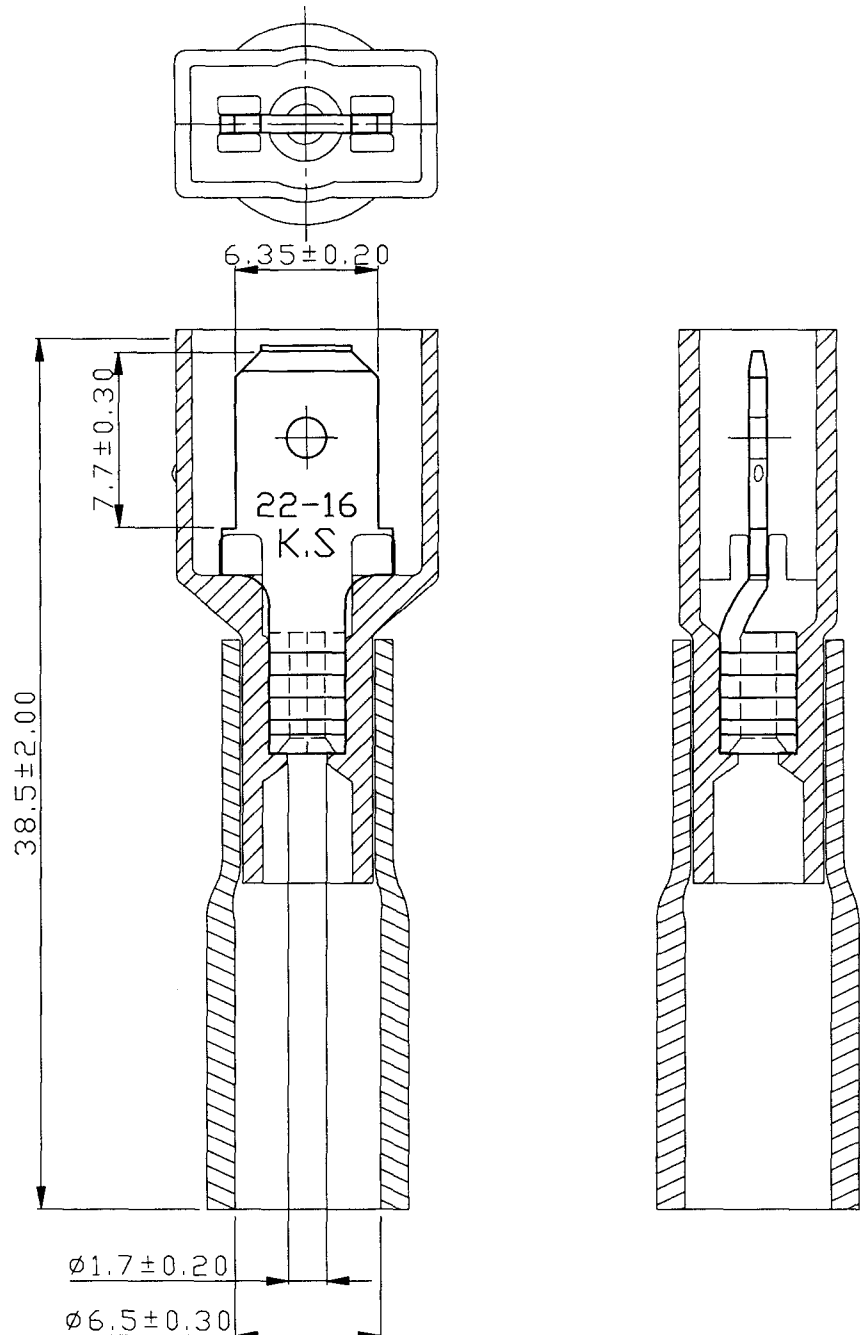

- NOTE :
1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	3	4	7	10
 2. MAXIMUM ELECTRICAL RATING : 300 VOLTS MAX.
 3. SHRINK TEMP. : 150°C
 4. OPERATING TEMP. : -10°C~+105°C
 5. INSULATION MATERIAL : NYLON & HIGH DENSITY PE.
 6. INSULATED COLOR : RED
 7. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
 8. TERMINAL MATERIAL : BRASS
 9. TERMINAL SURFACE TREATMENT : TIN PLATED
 10. TERMINAL THICKNESS : 0.80 mm
 11. NEMA TAB : 0.032 * 0.250 (0.8 * 6.35)

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF ±
18 > 30 mm ± 0.40	° > ° ±
30 > 75 mm ± 0.50	° > ° ±

NAME	HEAT SHRINKABLE-FULLY NYLON MALE DISCONNECTORS	UNIT	
PART NO.	MDFNYH1-250	MATERIAL	APPROVE
NUMBER	KA-94683-C	SCALE	CHECKED
DATE	2005/12/30	3/1	DRAWN

KST. K.S. TERMINALS INC.

A B C D E F G H