
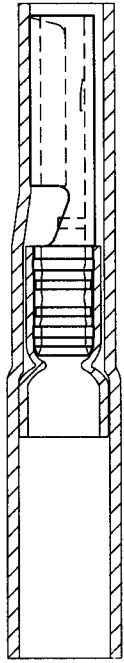
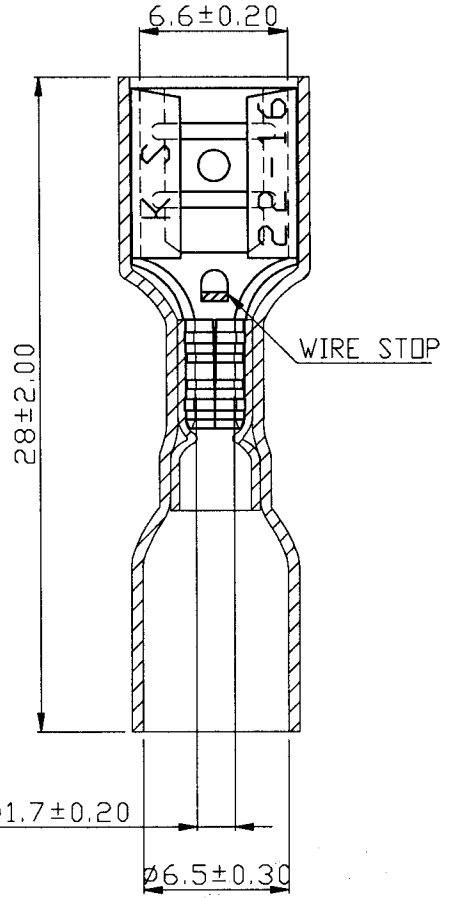


A B C D E F G H

REV	DESCRIPTION	DATE
-----	-------------	------



NOTE :

1. MAXIMUM ELECTRIC CURRENT : 

A.W.G.	22	20	18	16
AMP.	3	4	7	10
2. MAXIMUM ELECTRICAL RATING : 300 VOLTS MAX.
3. SHRINK TEMP. : 150°C
4. OPERATING TEMP. : -10°C~+105°C
5. INSULATION MATERIAL : HIGH DENSITY PE.
6. INSULATION MATERIAL : WITH COPPER SLEEVE ON BARREL
7. INSULATED COLOR : RED
8. WIRE RANGE : 22-16 A.W.G. ( 0.5-1.5 mm<sup>2</sup>)
9. TERMINAL MATERIAL : BRASS
10. TERMINAL SURFACE TREATMENT : TIN PLATED
11. TERMINAL THICKNESS : 0.40 mm
12. NEMA TAB : 0.032 inch \* 0.250 inch (0.8 mm \* 6.35 mm)

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° ° REF ±
18 > 30 mm ± 0.40	° ° ±
30 > 75 mm ± 0.50	° ° ±

NAME	HEAT SHRINKABLE-FULLY FEMALE DISCONNECTORS *HD*(DOUBLE CRIMP TYPE)				UNIT	mm	
PART NO.	FD FHD1-250	MATERIAL	-----	APPROVE			
NUMBER	KA-96085-C	SCALE	SHEET PAGE	CHECKED			
DATE	2007/01/15	3/1	1-0 10F1	DRAWN	張馨尹		

**KST. K.S. TERMINALS INC.**

A B C D E F G H