


A B C D E F G H X

REV	DESCRIPTION	DATE
-----	-------------	------

1
2
3
4
5
6

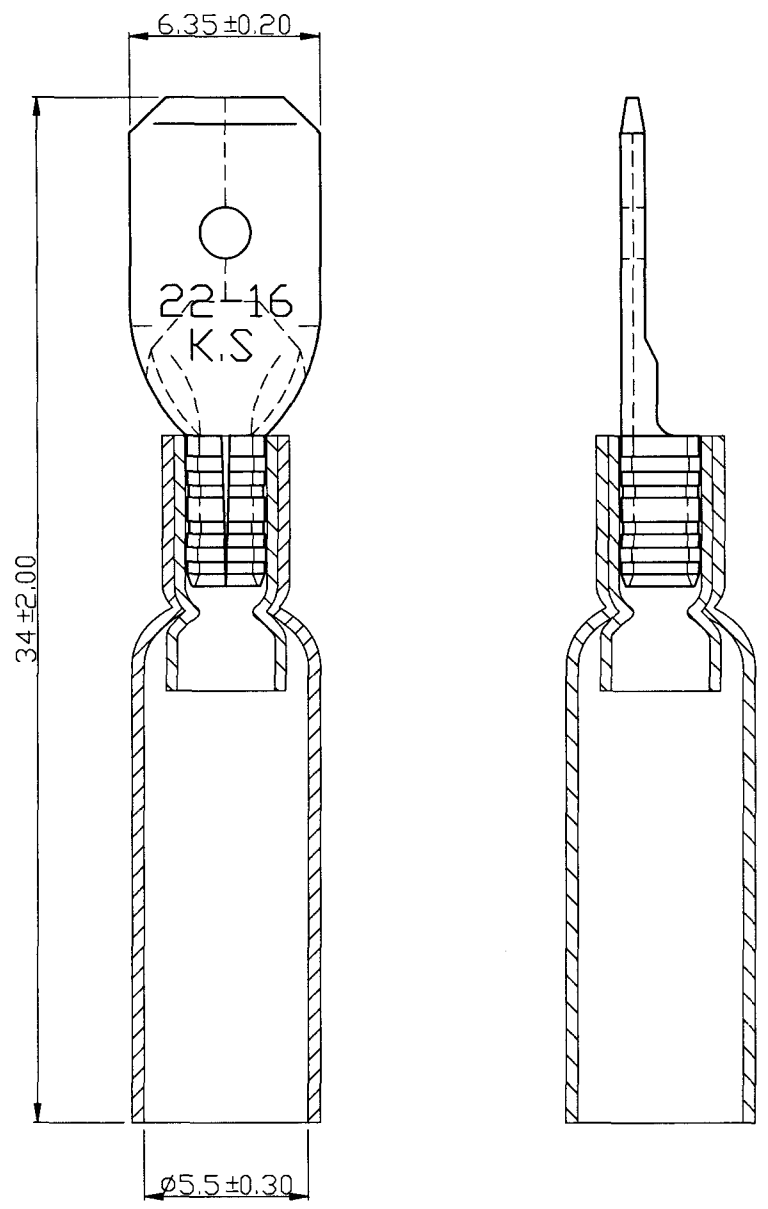

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18	16
AMP.	3	4	7	10
2. MAXIMUM ELECTRICAL RATING : 300 VOLTS MAX.
3. SHRINK TEMP. : 150°C
4. OPERATING TEMP. : -10°C~+105°C
5. INSULATION MATERIAL : HIGH DENSITY PE.
6. INSULATION MATERIAL : WITH COPPER SLEEVE ON BARREL
6. INSULATEDN COLOR : RED
8. WIRE RANGE : 22-16 A.W.G. (0.5-1.5 mm²)
9. TERMINAL MATERIAL : BRASS
10. TERMINAL SURFACE TREATMENT : TIN PLATED
11. TERMINAL THICKNESS : 0.40 mm
12. NEMA TAB : 0.032 * 0.250 (0.8 * 6.35)

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° ° REF ±
18 > 30 mm ± 0.40	° ±
30 > 75 mm ± 0.50	° ±

NAME	HEAT SHRINKABLE-MALE DISCONNECTORS "HD" (DOUBLE CRIMP TYPE)			UNIT	①	②
PART NO.	MDHD1-250	MATERIAL	-----	APPROVE	[Signature]	
NUMBER	KA-94041-C	SCALE	SHEET	PAGE	CHECKED	[Signature]
DATE	2007/02/06	4/1	1-0	10F1	DRAWN	張馨尹

KST. K.S. TERMINALS INC.

A B C D E F G H X