

CABLE DRAWING

Habia Cable

Typ: M-E 2419 STK 6

Habia inspection plan

Date of issue
1999-03-22

Drawing no
41432-014-06

Issued by
TW

Approved by
POM

Rev. no

Revised by

Revised date

Elektriska data vid + 20 °C / Electrical data at +20 °C (nom. data)

1 (1)


LEDARRESISTANS / CONDUCTOR RESISTANCE	max 80 Ω/km
ISOLATIONSRESISTANS / INSULATION RESISTANCE	> 1500 MΩ x km
KAPACITANS / CAPACITANCE	NS nF/ km
IMPEDANS / IMPEDANCE	NS Ω
DÄMPNING / ATTENUATION	MHz NS dB/100 m
PROVSPÄNNING / TEST VOLTAGE	3 kV DC
DRIFTSTEMPERATUR / TEMPERATURE RATING	-65/+200 °C
DRIFTSPÄNNING / VOLTAGE RATING	V
VIKT / WEIGHT	kg/km

This drawing remains a property of HABIA CABLE and it is forbidden to copy, show or give it to third part or other unauthorized persons without our written permission.

Pos	Beskrivning/Description	Dimensioner/Dimensions	Ytterdiam./ Overall diam. [mm]	Anm./Remarks
1	Filler			
2	M-E 2419	AWG 24	1,09/0,6	19x0,127
3	Skärm av försilvrad kopparledare	tråd diam. 0,13	3,9	Täckn. 85%
4	Mantel av FPI 205, vit	t= 0,35	4,6	

Färg på ledare:

- 0 - svart
- 2 - röd
- 4 - gul
- 5 - grön
- 6 - blå
- 9 - orange

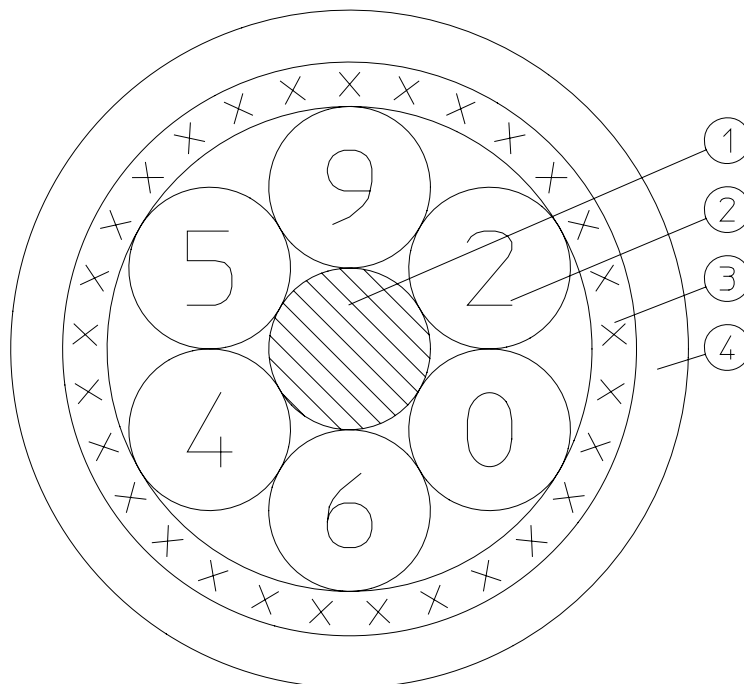

Habia Cable förbehåller sig rätten att ändra ingående material till annat likvärdigt material utan att meddela kund. Habia Cable reserves the right to change any material, dimensions or parameters without notice.