


EKK light 300/500V

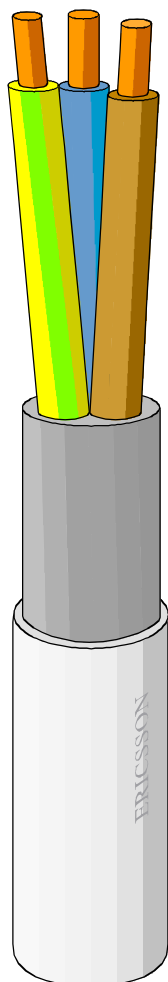

Design SS 424 02 19-3

EKK light 300/500V

Conductor

Solid, annealed copper wires according to IEC 60228, class 1.

Insulation

PVC, colours according to Swedish Standard SS 424 17 20

Filler

PVC

Sheath

PVC, white

Fire resistance

IEC 60332-1

Application

For permanent installation inside and outside and in duct.

Not for installation buried in ground.

Shall be protected against direct sunlight.

Technical data

EKK light 300/500V

Number of conductors and cross section	Diameter nom.			Weight	Minimum bending radius	Maximum pulling force	Resistance
	(mm ²)	Conductor (mm)	Insulation (mm)				
3 G 1,5	1,4	2,8	8,7	12	71	378	12,1
3 G 2,5	1,8	3,4	9,9	17	80	490	7,41
4 G 1,5	1,4	2,8	9,6	14,6	77	461	12,1
4 G 2,5	1,8	3,4	11,0	21	89	605	7,41
5 G 1,5	1,4	2,8	10,4	17,5	84	541	12,1
5 G 2,5	1,8	3,4	12,0	25	97	720	7,41
2 x 1,5	1,4	2,8	8,4	10,4	70	352	12,1

Order information

EKK light 300/500V

Number of conductors and cross section in mm ²	Product number	Package	Length (m)	
			Package	Pallet
3 G 1,5	04 104 00		-	-
3 G 1,5	04 104 01	Coil	50	1800
3 G 1,5	04 104 03	Bobbin	250	3000
3 G 1,5	04 104 05	Wooden drum	500	-
3 G 2,5	04 104 10		-	-
3 G 2,5	04 104 11	Coil	50	900
3 G 2,5	04 104 13	Bobbin	200	2400
3 G 2,5	04 104 15	Wooden drum	500	-
4 G 1,5	04 104 20	Delad pall	-	-
4 G 1,5	04 104 21	Coil	50	1800
4 G 1,5	04 104 23	Bobbin	200	2400
4 G 1,5	04 104 25	Wooden drum	500	-
4 G 2,5	04 104 30		-	-
4 G 2,5	04 104 31	Coil	50	1200
4 G 2,5	04 104 33	Bobbin	150	1800
4 G 2,5	04 104 35	Wooden drum	500	-
5 G 1,5	04 104 40	Delad pall	-	-
5 G 1,5	04 104 41	Coil	50	1200
5 G 1,5	04 104 43	Bobbin	150	1800
5 G 1,5	04 104 45	Wooden drum	500	-
5 G 2,5	04 104 50		-	-
5 G 2,5	04 104 51	Coil	50	900
5 G 2,5	04 104 53	Bobbin	150	1800
5 G 2,5	04 104 55	Wooden drum	500	-
2 x 1,5	04 104 60		-	-
2 x 1,5	04 104 61	Coil	50	1800
2 x 1,5	04 104 63	Bobbin	250	3000
2 x 1,5	04 104 65	Wooden drum	500	-