



MODEL NO: 19-21UBC/C430/TR8

Device Number : DSE-191-016 REV. 1.1

0.8mm Height Flat Top LEDs

ECN : Page: 1/8

Features :


- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.

Descriptions :

- The 19-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications, etc.

Applications :

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

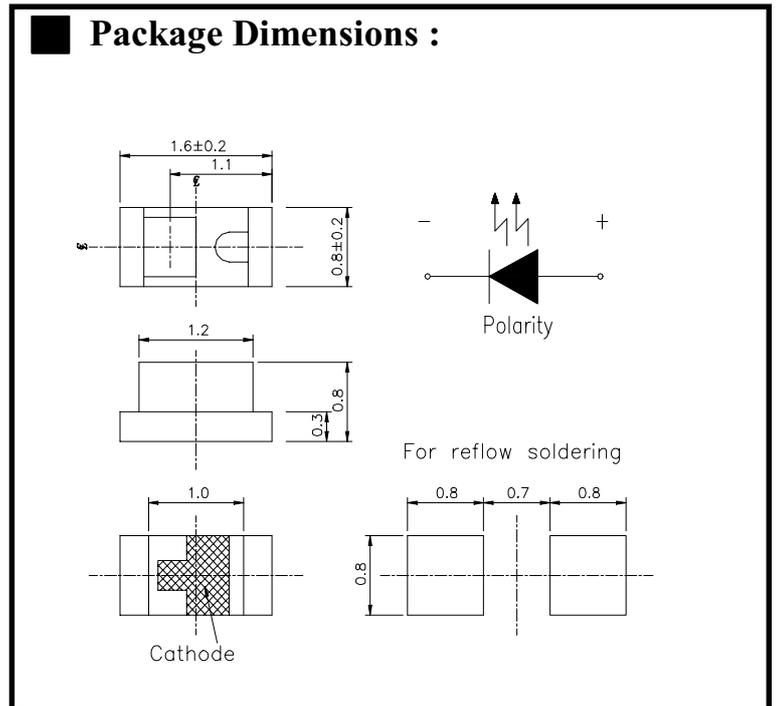

Notes :

Tolerances Unless Dimension $\pm 0.1\text{mm}$
 Angle $\pm 0.5^\circ$
 Unit = mm

PART NO	Chip		Lens Color
	Material	Emitted Color	
19-21UBC/C430/TR8	GaN/SiC	Blue	Water Clear

Office: NO. 25, Lane 76, Sec. 3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL: 886-2-2267-2000, 2267-9936

FAX: 886-2-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com





MODEL NO: 19-21UBC/C430/TR8

Device Number : DSE-191-016 REV. 1.1


0.8mm Height Flat Top LEDs

ECN : _____ Page: 2/8

Package Dimensions :

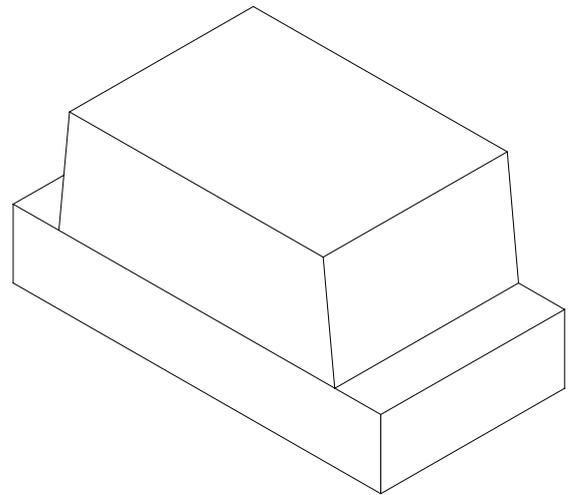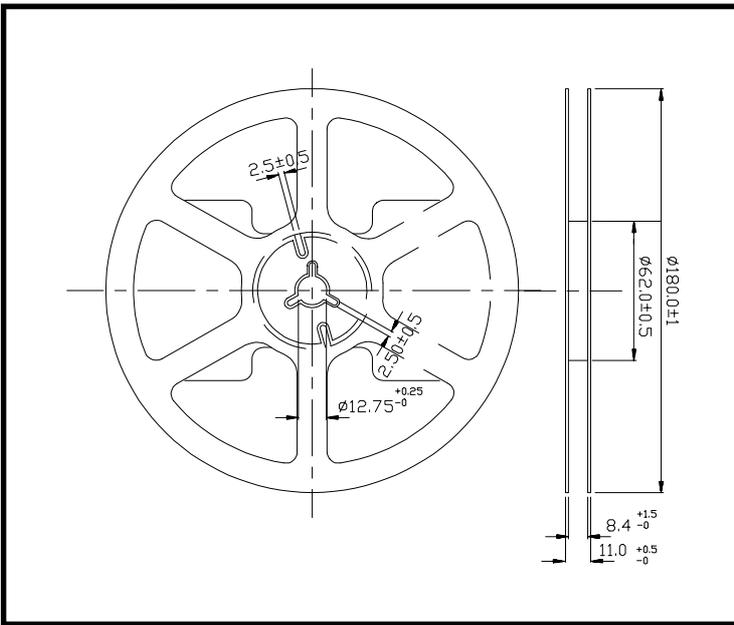

Loaded quantity per reel 3000 pcs/reel :

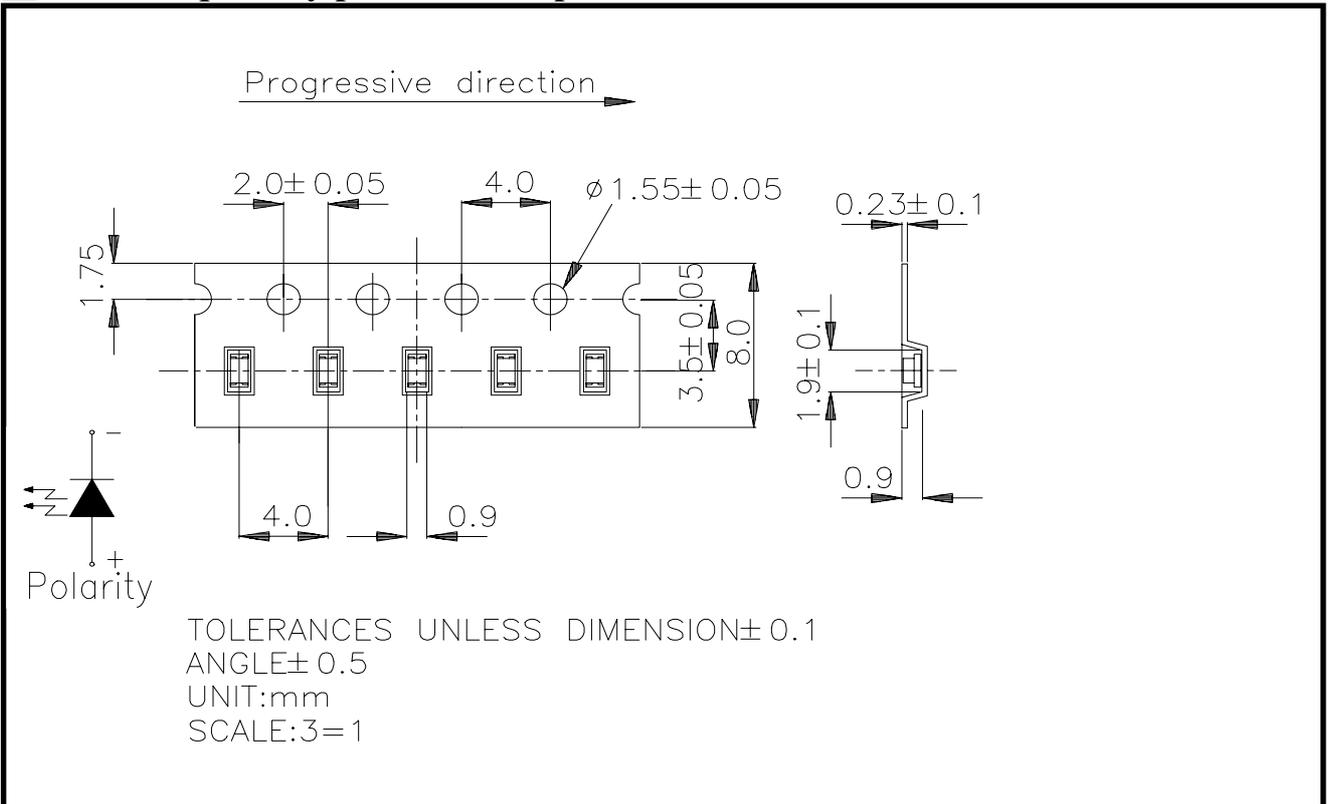



MODEL NO: 19-21UBC/C430/TR8

Device Number : DSE-191-016 REV. 1.1

0.8mm Height Flat Top LEDs

ECN : _____ Page: 3/8

■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Reverse Voltage	Vr	5	V
Forward Current	If	30	mA
Operating Temperature	Topr	-20 ~ +80	°C
Storage Temperature	Tstg	-30 ~ +90	°C
Soldering Temperature	Tsol	260 (for 5 second)	°C
Electrostatic Discharge	ESD	1000	V
Power Dissipation	Pd	140	mW
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	70	mA

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	Iv	14	18	-----	mcd	If=20mA
Viewing Angle	2θ 1/2	-----	100	-----	deg	If=20mA
Peak Wavelength	λp	-----	428	-----	nm	If=20mA
Dominant Wavelength	λd	-----	466	-----	nm	If=20mA
Spectrum Radiation Bandwidth	Δλ	-----	65	-----	nm	If=20mA
Forward Voltage	Vf	-----	3.8	4.5	V	If=20mA
Reverse Current	Ir	-----	-----	50	μA	Vr=5V



MODEL NO: 19-21UBC/C430/TR8

Device Number : DSE-191-016 REV. 1.1

0.8mm Height Flat Top LEDs

ECN : _____ Page: 4/8

Reliability Test Items And Conditions:

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLE	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	If = 20 m A	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1







MODEL NO: 19-21UBC/C430/TR8

Device Number : DSE-191-016 REV. 1.1


0.8mm Height Flat Top LEDs

ECN : _____ Page: 5/8


■ **Typical Electro-Optical Characteristic Curves**

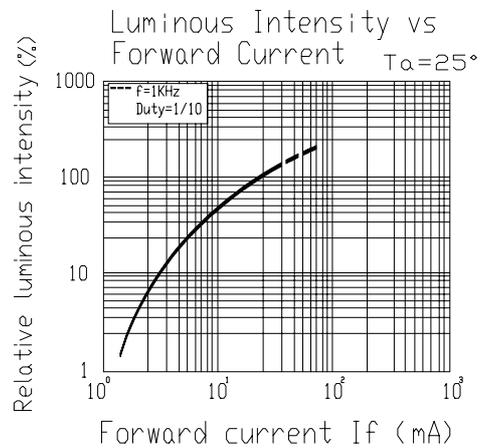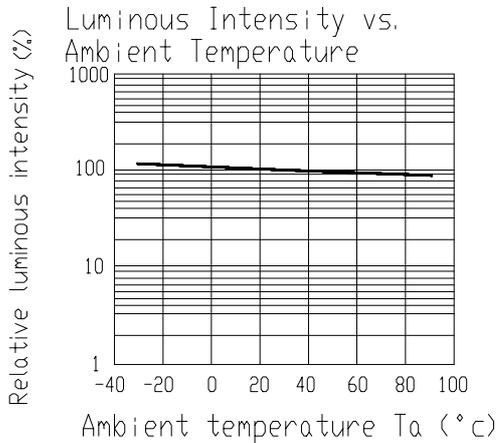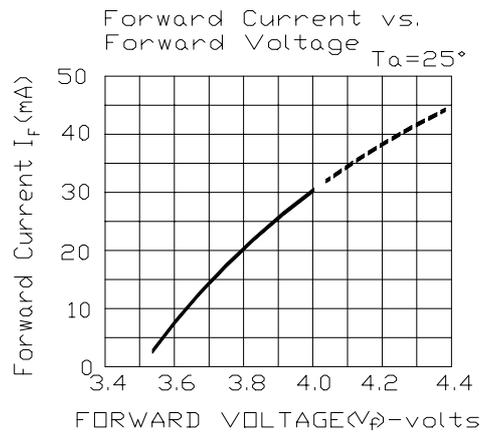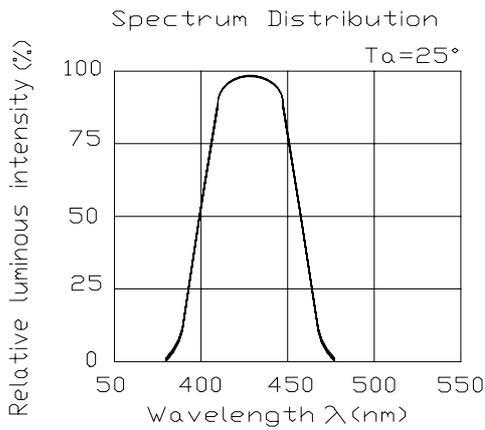

Forward Current Derating Curve

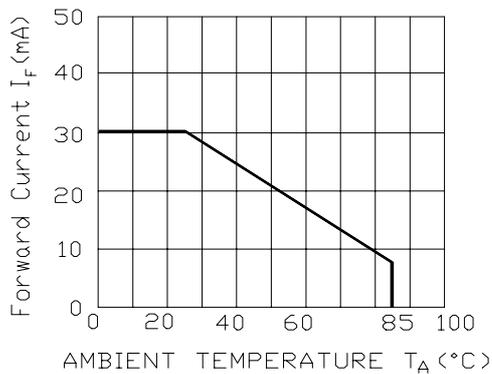

Radiation Diagram $T_a=25^\circ$

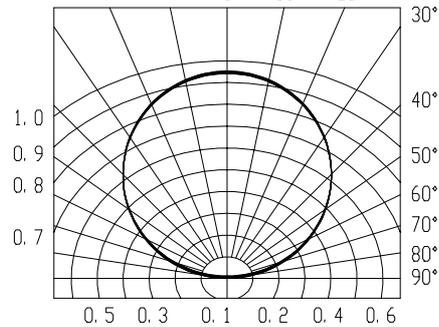



MODEL NO: 19-21UBC/C430/TR8

Device Number : DSE-191-016 REV. 1.1

0.8mm Height Flat Top LEDs

ECN : Page: 8/8

■ Reflow Temp / Time :

