# 1-2106431-4 - ACTIVE

## LUMAWISE | Insulation Displacement Connectors Closed End

TE Internal #: 1-2106431-4 Insulation Displacement Connectors Closed End, Poke-In Connectors, Wire-to-Board, 4 Position, 4 in [.16 mm] Centerline, Printed Circuit Board

View on TE.com >

Connectors > Lighting Connectors > Poke-In Connectors



## Connector System: Wire-to-Board

Number of Positions: 4

Centerline (Pitch): .16 mm [ 4 in ]

Sealable: No

Connector & Contact Terminates To: Printed Circuit Board

## Features

## Product Type Features

Connector Type

Connector Style

Connector System

ennectivity

Connector Assembly

Receptacle

Wire-to-Board

| Sealable                                    | No                    |
|---|-----------------------|
| Connector & Contact Terminates To           | Printed Circuit Board |
| Configuration Features                      |                       |
| Number of Positions                         | 4                     |
| Contact Features                            |                       |
| Contact Current Rating (Max)                | 7.5 A                 |
| Termination Features                        |                       |
| Termination Method to Printed Circuit Board | Surface Mount         |
| Mechanical Attachment                       |                       |
| Connector Mounting Type                     | Board Mount           |
| Housing Features                            |                       |
| Centerline (Pitch)                          | .16 mm[4 in]          |
| Dimensions                                  |                       |
| Connector Height                            | .23 mm[5.8 in]        |

## 1-2106431-4

Insulation Displacement Connectors Closed End, Poke-In Connectors, Wire-to-Board, 4 Position, 4 in [.16 mm] Centerline, Printed Circuit Board



| Wire Size   | 20 – 18 AWG   |
|---|---|
| Usage Conditions  |   |
| Operating Temperature Range   | -40 - 105 °C[-40 - 221 °F]  |
| Operation/Application   |   |
| Circuit Application   | Power   |
| Product Compliance<br>For compliance documentation, visit the product page on TE.com> | Campaliant  |
| EU RoHS Directive 2011/65/EU  | Compliant   |
| EU ELV Directive 2000/53/EC   | Compliant   |
| China RoHS 2 Directive MIIT Order No 32, 2016   | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006  | Current ECHA Candidate List: JAN 2022<br>(223)<br>Candidate List Declared Against: JAN 2022<br>(223)<br>Does not contain REACH SVHC |
| Halogen Content   | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC   |
|   | Free  |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

## 1-2106431-4

Insulation Displacement Connectors Closed End, Poke-In Connectors, Wire-to-Board, 4 Position, 4 in [.16 mm] Centerline, Printed Circuit Board






# Also in the Series | Insulation Displacement Connectors Closed End



# Customers Also Bought

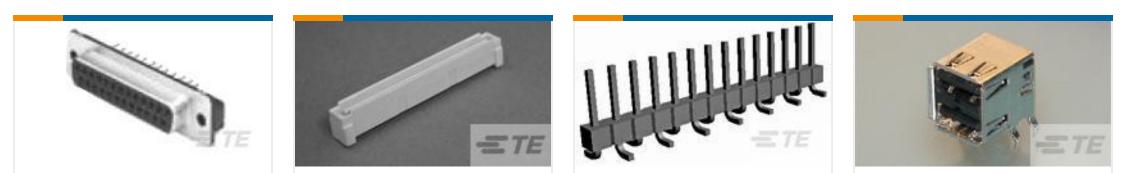

| TE Part #3-338314-2<br>15POS.HD20 REC.ASSY | TE Part #3-5177986-2<br>0.8FH,P08H.5,060,08/Sn,TR,SC  | TE Part #1241150-3<br>3P MOD II BREAK AWAY HDR,SMD,<br>BLISTER | TE Part #5787617-1<br>RECP ASSY, R/A, STACKED, THRU-<br>HOLE, USB, |
|--|---|--|--|
|  | ETE   |  |  |
| TE Part #1-825433-0<br>MOD 2 PINHDR 1X10P. | TE Part #5-1676481-7<br>CPF 0603 1K3 0.1% 25PPM 1K RL | TE Part #3-1825010-7<br>ASE6204=6PDT AUTOSLIDE                 | TE Part #826942-4<br>4P MOD2 STIFT LEI                             |



## 1-2106431-4

Insulation Displacement Connectors Closed End, Poke-In Connectors, Wire-to-Board, 4 Position, 4 in [.16 mm] Centerline, Printed Circuit Board



## Documents

**Product Drawings** Connector, SMT-IDC PASS THRU, 4 POS, 20

English

## **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1-2106431-4\_B.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-2106431-4\_B.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-2106431-4\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages IDC\_SSL\_CONNECTOR

English

**Product Specifications** Application Specification

English

Agency Approvals Agency Approval Document

English