

AMP | AMP Type III+ TE Internal #: 1-66101-7 AMP Type III+, Power Contacts, Contact, Precious Metal, 18 – 16 AWG Wire Size, .8 – 1.4 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket

View on TE.com >

Connectors > Power Connectors > Power Contacts



Power Contact Type: Contact

Contact Mating Area Plating Material: Precious Metal

Wire Size: .8 – 1.4 mm²

Connector & Contact Terminates To: Wire & Cable

Features

Product Type Features

Power Contact Type

Connector & Contact Terminates To

Electrical Characteristics

Test Current



Contact

Wire & Cable

13 A

Contact Features

| Contact Mating Area Plating Material | Precious Metal |
|--|--------------------------|
| Contact Current Rating (Max) | 13 A |
| Contact Type | Socket |
| Mating Pin Diameter | 1.57 mm[.062 in] |
| Contact Base Material | Brass |
| Contact Mating Area Plating Material Thickness | .38 μm[15 μin] |
| Wire Contact Termination Area Plating Thickness | 1.27 μm[50 μin] |
| Wire Contact Termination Area Plating Material | Tin |
| Wire Contact Termination Area Plating Material Finish | Bright |
| Contact Orientation | Straight |
| | |
| Contact Underplating Material | Nickel |
| Contact Underplating Material Contact Underplating Material Thickness | Nickel .76 µm[30 µin] |
| | |

& For support call+1 800 522 6752

AMP Type III+, Power Contacts, Contact, Precious Metal, 18 – 16 AWG Wire Size, .8 – 1.4 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket



| Termination Method to Wire & Cable | Crimp |
|--|---|
| Mechanical Attachment | |
| Wire Insulation Support | With |
| Dimensions | |
| Wire Size | .8 – 1.4 mm ² |
| Accepts Wire Insulation Diameter Range | 2.03 – 2.54 mm[.08 – .1 in] |
| Usage Conditions | |
| Operating Temperature Range | -55 – 90 °C[-67 – 194 °F] |
| Operation/Application | |
| Circuit Application | Power & Signal |
| Packaging Features | |
| Packaging Method | Box, Loose Piece |
| Packaging Quantity | 100 |
| Other | |
| Wire/Cable Type | Discrete Wire |
| For Use With | CPC Connectors, G Series Connectors, M Series Connectors |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant | | |
|---|---|--|--|
| EU ELV Directive 2000/53/EC | Compliant | | |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold | | |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC | | |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free | | |
| Solder Process Capability | Not applicable for solder process capability | | |
| Product Compliance Disclaimer | | | |


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

AMP Type III+, Power Contacts, Contact, Precious Metal, 18 – 16 AWG Wire Size, .8 – 1.4 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket




EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

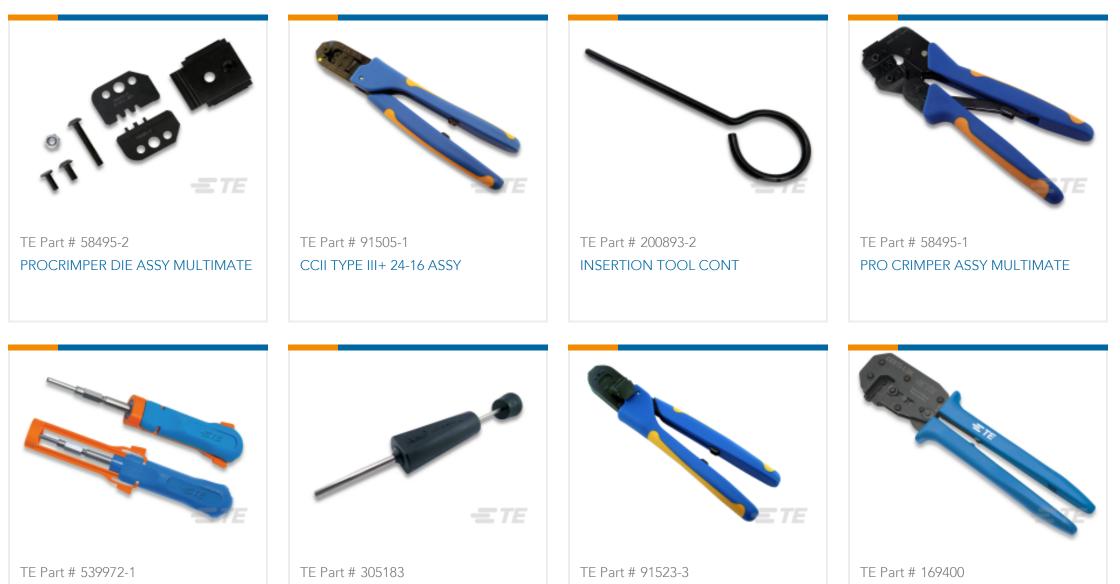

| EXTRACTION TOOL | EXTRACT TOOL TYPE 2 20-16 | CCII TYPE III+ PIN S | SKT 24-16 HEAD | CERTI-LOK |
|-----------------|---------------------------|----------------------|----------------|-----------|
| | | | | |
| | | | | |


Also in the Series | AMP Type III+

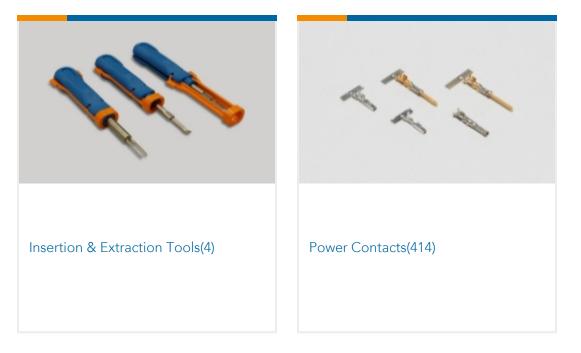

Customers Also Bought

AMP Type III+, Power Contacts, Contact, Precious Metal, 18 – 16 AWG Wire Size, .8 – 1.4 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket



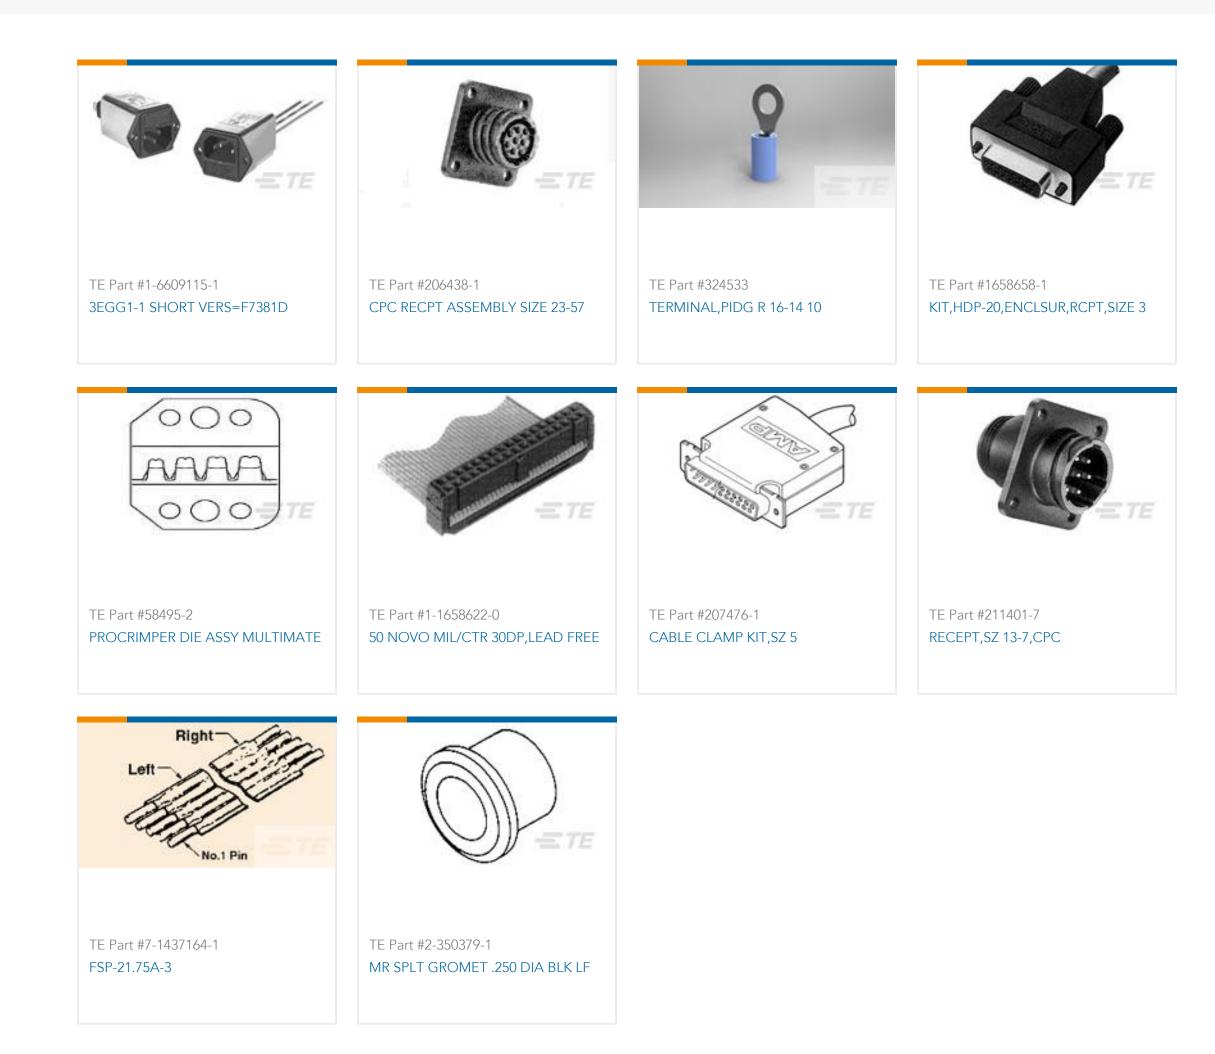

Documents

Product Drawings III+ SKT,18-16,15AU/FL,SMPACK

English

CAD Files

Customer View Model ENG_CVM_CVM_1-66101-7_Z.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-66101-7_Z.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-66101-7_Z.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications

C For support call+1 800 522 6752

AMP Type III+, Power Contacts, Contact, Precious Metal, 18 – 16 AWG Wire Size, .8 – 1.4 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket



Product Specification

English

Instruction Sheets Instruction Sheet (U.S.) Japanese Instruction Sheet (U.S.)

English