

BallStar™ Tip L-Wrenches

- ProGuard™ Finish -

- Fits all TORX® and Star screws
- Ball End inserts into screws at a 20° angle
- Ball End saves time by quickly funneling tool into screw
- Superior Ball End strength and working angle
- Works in hard to reach places



| Sets | PART# | MODEL# | PCS | LENGTH | CONTENTS | QTY | LIST |
|-------------------|-------|--------|-----|--------|---------------------------------------|-----|---------|
| BALL STAR™ | 11346 | LTX6 | 6 | Long | T6, T7, T8, T9, T10, T15 | 1 | \$31.46 |
| | 11331 | LTX8S | 8 | Long | T6, T7, T8, T9, T10, T15, T20, T25 | 1 | \$43.52 |
| | 11332 | LTX8 | 8 | Long | T9, T10, T15, T20, T25, T27, T30, T40 | 1 | \$49.01 |

TAGGED/BARCODED


| Singles | SIZE | INCH | MM | INCH | MM | PART# | QTY | LIST EA |
|-------------------|------|------|-----|------|----|-------|-----|---------|
| BALL STAR™ | T6 | 2.1 | 55 | 0.65 | 16 | 11706 | 5 | \$5.07 |
| | T7 | 2.4 | 61 | 0.65 | 16 | 11707 | 5 | \$5.07 |
| | T8 | 2.6 | 67 | 0.65 | 16 | 11708 | 5 | \$5.07 |
| | T9 | 2.9 | 74 | 0.65 | 16 | 11709 | 5 | \$5.07 |
| | T10 | 3.2 | 80 | 0.73 | 19 | 11710 | 5 | \$5.49 |
| | T15 | 3.3 | 84 | 0.78 | 20 | 11715 | 5 | \$5.68 |
| | T20 | 3.6 | 91 | 0.78 | 20 | 11720 | 5 | \$5.85 |
| | T25 | 3.8 | 98 | 0.88 | 22 | 11725 | 5 | \$6.28 |
| | T27 | 4.2 | 106 | 0.95 | 24 | 11727 | 5 | \$6.49 |
| | T30 | 4.6 | 116 | 1.03 | 26 | 11730 | 5 | \$6.68 |
| | T40 | 4.9 | 125 | 1.11 | 28 | 11740 | 5 | \$7.48 |
| | T45 | 5.4 | 138 | 1.20 | 30 | 11745 | 1 | \$8.91 |
| | T50 | 6.2 | 156 | 1.25 | 32 | 11750 | 1 | \$9.93 |
| | T55 | 6.7 | 171 | 1.36 | 34 | 11755 | 1 | \$13.39 |

Did you know...?
 BallStar™ tools work at a 20° angle; screws can be turned continuously without constantly taking the tool out of the screw, repositioning it and reinserting it, even at angles up to 20°.

Tamper Resistant TORX® L-Wrenches

- ProGuard™ Finish -

- Fits all TORX® and Star tamper resistant screws
- Broad contact surface provides deep lobe engagement
- Straight, vertical sidewalls increase tool engagement and virtually eliminates camout

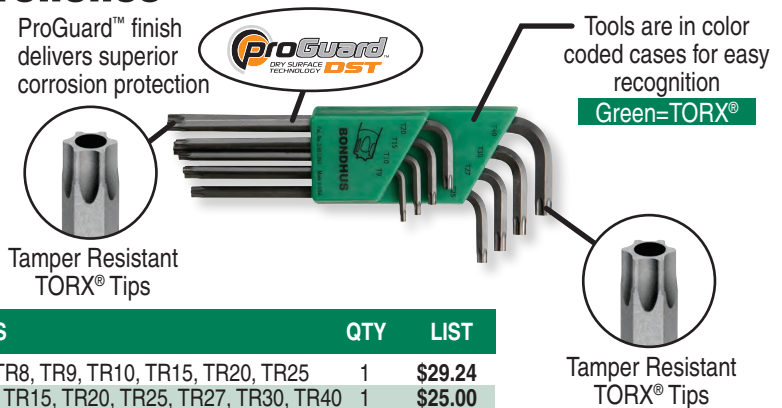

| Sets | PART# | MODEL# | PCS | LENGTH | CONTENTS | QTY | LIST |
|--------------|-------|---------|-----|--------|---|-----|---------|
| TORX® | 32432 | TR-TL8S | 8 | Long | TR6, TR7, TR8, TR9, TR10, TR15, TR20, TR25 | 1 | \$29.24 |
| | 32434 | TR-TL8 | 8 | Long | TR9, TR10, TR15, TR20, TR25, TR27, TR30, TR40 | 1 | \$25.00 |

SINGLE PACKAGING

BULK

TAGGED/BARCODED

| Singles | SIZE | INCH | MM | INCH | MM | PART# | QTY | LIST EA | PART# | QTY | LIST EA |
|-------------------|------|------|-----|------|----|-------|-----|---------|-------|-----|---------|
| LONG TORX® | TR6 | 2.1 | 55 | 0.65 | 16 | 33406 | 25 | \$4.55 | 32406 | 2 | \$5.07 |
| | TR7 | 2.4 | 61 | 0.65 | 16 | 33407 | 25 | \$4.22 | 32407 | 2 | \$4.68 |
| | TR8 | 2.6 | 67 | 0.65 | 16 | 33408 | 25 | \$4.22 | 32408 | 2 | \$4.68 |
| | TR9 | 2.9 | 74 | 0.65 | 16 | 33409 | 25 | \$4.22 | 32409 | 2 | \$4.68 |
| | TR10 | 3.2 | 80 | 0.73 | 19 | 33410 | 25 | \$2.23 | 32410 | 2 | \$2.58 |
| | TR15 | 3.3 | 84 | 0.78 | 20 | 33415 | 25 | \$2.28 | 32415 | 2 | \$2.69 |
| | TR20 | 3.6 | 91 | 0.78 | 20 | 33420 | 25 | \$2.40 | 32420 | 2 | \$2.80 |
| | TR25 | 3.8 | 98 | 0.88 | 22 | 33425 | 25 | \$2.51 | 32425 | 2 | \$2.93 |
| | TR27 | 4.2 | 106 | 0.95 | 24 | 33427 | 25 | \$2.75 | 32427 | 2 | \$3.04 |
| | TR30 | 4.6 | 116 | 1.03 | 26 | 33430 | 25 | \$2.79 | 32430 | 2 | \$3.34 |
| | TR40 | 4.9 | 125 | 1.11 | 28 | 33440 | 25 | \$2.93 | 32440 | 2 | \$3.45 |

Did you know...?
 ProGuard® protection is a permanent solution that does not wipe off like common oil and black oxide finishes; tools remain in good condition with up to 5 times the resistance to rust and corrosion.