



Model No.: **GP357E**

Type	: Mercury and Lead Free Alkaline Battery
Chemical System	: Zinc/Silver Oxide
Nominal Voltage	: 1.55Volts
Nominal Dimension	: $\Phi$ 11.60mm $\times$ 5.40mm
Applications	: Analog watch
Average Weight	: 2.1 g
Data Code	: Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.
Shelf Life	: Not less than 90% of the service capacity within first year, storage at $20 \pm 2^\circ\text{C}$ 45-75%RH.
Close Circuit Voltage	: 1.30 V(min.) (load resistor $200\ \Omega$ at $20 \pm 2^\circ\text{C}$ for 0.1 to 2 seconds)
Nominal Service Life (to 1.2V at $20 \pm 2^\circ\text{C}$ )	: 260hrs (at $3.0\ \text{k}\Omega$ load)
Average Service Capacity (to 1.2V at $20 \pm 2^\circ\text{C}$ )	: 140mAh (at $3.0\ \text{k}\Omega$ load)
Cross References:	
IEC	others
SR44	D357,357

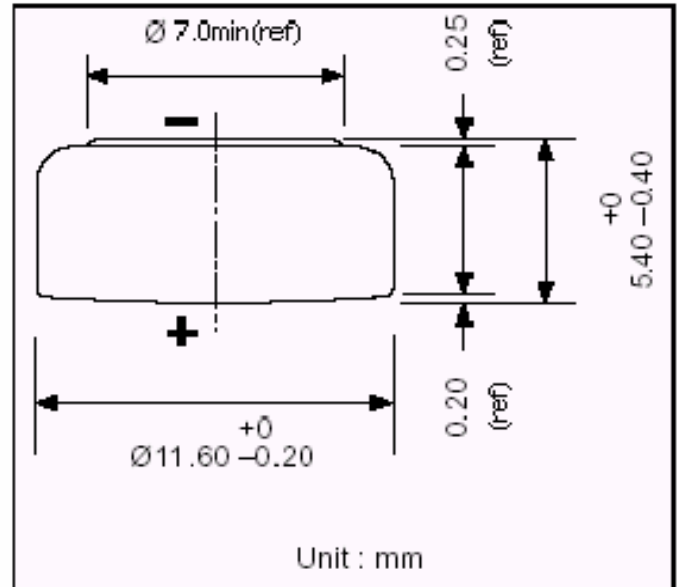

Typical Discharge characteristics at  $200 \pm 2^\circ\text{C}$

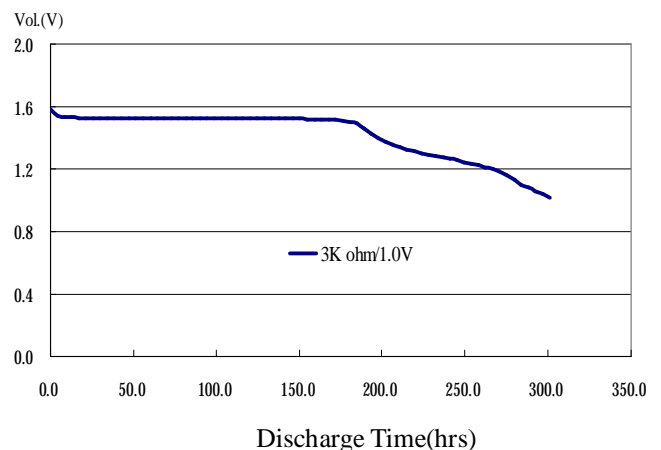

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.