

Signal lamps with integrated filament/neon lamp - 14 mm



Pict.: transparent red

transparent colourless

Panel cut-out

Technical Data

General information

Form of lens see order block
Colour of lens see order block

Dimensions

Dimensions of collar see order block
Overall height 4 mm
Mounting depth see order block
Mounting hole 14 mm

Mechanical design

Mounting pressing into hole
Terminals see order block
Lamp socket no
Lamp see order block

Electrical characteristics

Voltage limit max. see order block
Power limit max. 1.2 W

Other specifications

Operating life see order block
Degree of protection from front side IP40
Weight 5 g

3


integr.
Lamp

Approvals



VDET85° (only version with neon lamp)


Signal lamps with integrated neon lamp - 14 mm, round lens, 230 V

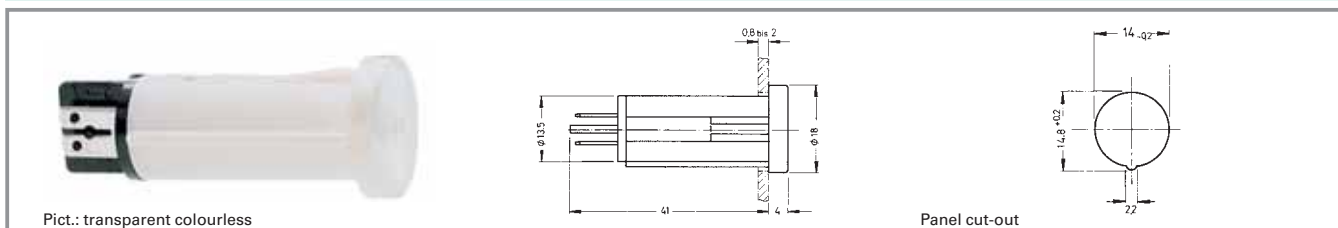

Voltage limit max.	Power limit max.	Lamp	Terminals	Operating life	Colour of lens	Order no.
230 V	-	neon lamp	quick connector 2.8 x 0.8	-	transparent colourless	1.02.614.502/1002
230 V	-	neon lamp	quick connector 2.8 x 0.8	-	transparent red	1.02.614.502/1301
230 V	-	neon lamp	quick connector 2.8 x 0.8	-	transparent yellow	1.02.614.502/1402
230 V	-	neon glow lamp	quick connector 2.8 x 0.8	-	transparent green	1.02.614.503/1502

Technical data see page 3 - 36

Signal lamps with integrated filament lamp - 14 mm, round lens, 28 V

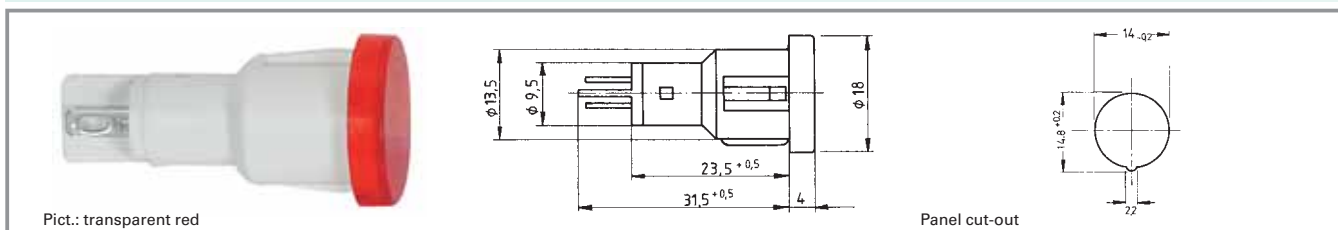

Voltage limit max.	Power limit max.	Lamp	Terminals	Operating life	Colour of lens	Order no.
28 V	1.2 W	filament lamp	quick connector 2.8 x 0.8	10,000 h	transparent colourless	1.69.523.003/1002
28 V	1.2 W	filament lamp	quick connector 2.8 x 0.8	10,000 h	transparent red	1.69.523.003/1301
28 V	1.2 W	filament lamp	quick connector 2.8 x 0.8	10,000 h	transparent yellow	1.69.523.003/1402
28 V	1.2 W	filament lamp	quick connector 2.8 x 0.8	10,000 h	transparent green	1.69.523.003/1502

Technical data see page 3 - 36