


WIRE ADDRESS

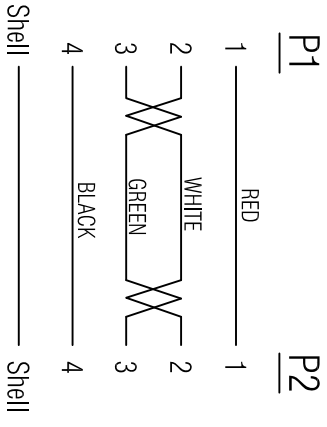

- Electrical Test:
1. 100% TEST OPEN SHORT MIS-WIRE.
 2. CONTACT RESISTANCE:5Ω MAX.
 3. INSULATION RESISTANCE:5MΩ MIN.
 4. HI-POT:300V DC/10MS.
 5. SUPPORT USB 2.0 480Mbps.

NUMBER	1	2	4	Quantity	Unit
C	4SP PVC BLACK				g
B	USB A MALE(White Insulator, Shell Nickel Plated, Pin Gold Plated 30U ^m)			2	PCS
A	UL2725 28#(7/0.127(TC)**1P+24#(7/0.20(TC)*2C+AL+D[28#(7/0.12/BO)]+B(AW/64B).OD=5.0mm BLACK PVC JACKET.			1	PCS
PRODUCT SPECIFICATIONS					

D				
C				
B				
VER.A	REVISE		DATE	
EAN USB 2.0 CABLE, USB AM-AM, 30U ^m , 4.5M				
Item	11.02.8945			
Draw	Sam	Date: 2014.12.05		
Approval				
Duty	F16	BOM.NO: 10929		
Sample NO.				

