


Surge protection device - TTC-6P-4-24DC-PT-I - 1106014

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Surge protection, consisting of protective plug and base element, with integrated status indicator for a 4-wire floating signal circuit with high nominal current. Ideal for 4-conductor measurements, e.g., of temperature and weight.

Your advantages

- ✓ Efficient use of space: the narrowest pluggable surge protection solution for 4-conductor applications
- ✓ Easy function monitoring: on-site or optionally via remote signaling, with optical monitoring, without additional effort
- ✓ Servicing without affecting the signal: replace the surge protection module without affecting the measuring signal
- ✓ Flexible choice: Push-in Technology or screw connection



Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 997100
GTIN	4055626997100
Weight per Piece (excluding packing)	32.620 g
Custom tariff number	85363010
Country of origin	Germany
Sales Key	CL2162

Technical data

Dimensions

Height	125 mm
Width	6.2 mm +0.1 mm
Depth	100 mm (incl. DIN rail 7.5 mm)

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 %

Surge protection device - TTC-6P-4-24DC-PT-I - 1106014

Technical data

Ambient conditions

Altitude	≤ 4000 m (amsl (above mean sea level))
Degree of protection	IP20

General

Housing material	PBT
Flammability rating according to UL 94	V-0
Color	traffic grey A RAL 7042 light grey RAL 7035
Mounting type	DIN rail: TH 35 - 7.5 mm
Type	DIN rail module, two-section, divisible
Direction of action	Line-Line & Line-Earth Ground

Protective circuit

IEC test classification	C1 C2 C3 D1
Nominal voltage U_N	24 V DC 24 V AC
Maximum continuous voltage U_C	36 V DC 30 V AC
Rated current	2.5 A (60°C for insulated systems)
Operating effective current I_C at U_C	≤ 5 μA
Residual current I_{PE}	≤ 1 μA
Nominal discharge current I_n (8/20) μs (line-line)	350 A
Nominal discharge current I_n (8/20) μs (line-earth)	5 kA
Pulse discharge current I_{imp} (10/350) μs (line-earth)	0.5 kA
Total discharge current I_{total} (8/20) μs	10 kA
Voltage protection level U_p (line-line)	≤ 100 V (C1 - 0.7 kV / 350 A) ≤ 100 V (C3 - 50 A) ≤ 80 V (C3 - 25 A)
Voltage protection level U_p (line-earth)	≤ 900 V (C1 - 1 kV/500 A) ≤ 900 V (C2 - 10 kV / 5 kA)
Response time t_A (line-line)	≤ 1 ns
Response time t_A (line-earth)	≤ 100 ns
Input attenuation aE, sym.	typ. 0.3 dB (≤ 12 MHz / 150 Ω)
Cut-off frequency f_g (3 dB), sym. in 150 Ω system	> 60 MHz
Capacity (line-line)	typ. 30 pF
Capacity (line-earth)	typ. 30 pF
Resistance per path	0.03 Ω
Surge protection fault message	optical

Surge protection device - TTC-6P-4-24DC-PT-I - 1106014

Technical data

Protective circuit

Max. required back-up fuse	2.5 A (F)
Impulse durability (line-line)	C1 - 700 V / 350 A
	C3 - 50 A
Impulse durability (line-earth)	C1 - 1 kV / 500 A
	C2 - 10 kV / 5 kA
	C3 - 100 A
	D1 - 500 A

Connection data

Connection method	Push-in connection
Stripping length	8 mm
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section AWG	24 ... 12

Standards and Regulations

Standards/specifications	IEC 61643-21 2000 + corrigendum 2001 + A1:2008, modified + A2:2012
	EN 61643-21 2001 + A1:2009 + A2:2013

Environmental Product Compliance


REACH SVHC	Lead 7439-92-1
------------	----------------

Drawings


Pictogram



Dimensional drawing

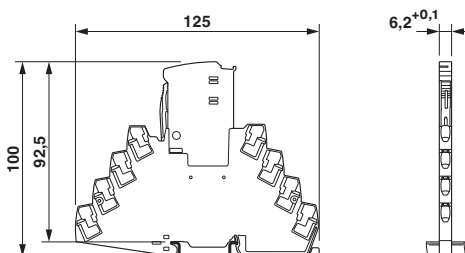

Circuit diagram

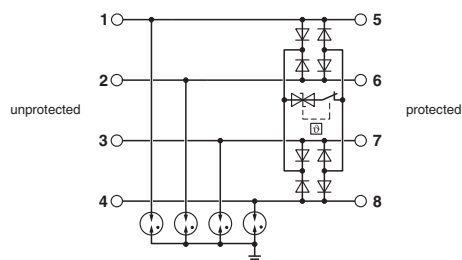

Diagram

