


Data sheet

Order No.: 1161119

Type: MKDSN 1,5/ 3-5,08 MCBD:+-S

PCB terminal block, Screw connection with tension sleeve

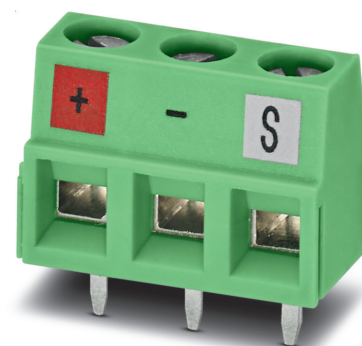

1 Main features



• No. of pos.	3	• Nominal current	13.5 A
• Conductor cross section	1.5 mm ²	• Nominal voltage	400 V
• Color	green (6021)	• Connection direction	0°
• Pitch	5.08 mm	• Type of packaging	packed in cardboard
• Connection method	Screw connection with tension sleeve		

2 Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors
- ✓ Extremely small design for the respective conductor cross section
- ✓ The latching on the side enables various numbers of positions to be combined



Make sure you always use the latest documentation.

It can be downloaded at: phoenixcontact.net/product/1161119

1161119 MKDSN 1,5/ 3-5,08 MCBD:+-S**3 Table of contents**

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	General Technical Data	3
5	Material properties.....	3
6	Dimensions.....	5
7	Series drawing.....	6
8	Product notes	7
9	Application.....	7
10	Packaging information	7
11	Mechanical tests.....	8
12	Electrical tests	9
13	Current carrying capacity/derating curves	11
14	Environmental and durability tests	12
15	Approvals / Certificates.....	13
16	Commercial Data.....	14
17	Accessories.....	14

1161119 MKDSN 1,5/ 3-5,08 MCBD:+-S**4 General Technical Data****4.1 item properties**

Order No.	1161119
Type	MKDSN 1,5/ 3-5,08 MCBD:+-S
Product type	PCB terminal block
Range of articles	MKDSN 1,5
Pitch	5.08 mm
Number of positions	3
Number of levels	1
Number of connections	3
Number of potentials	3
Connection method	Screw connection with tension sleeve
Screw thread	M3
Drive form screw head	Slotted (L)
Mounting type	Wave soldering
Connection direction of the conductor to the PCB	0 °
Pin layout	Linear pinning
Solder pins per potential	1
Product note	Satisfies the requirements of the "APL Port Profile Specification" (Draft 0.3)
Type	PC termination block

4.2 Connection capacity

Conductor cross section, rigid	0.14 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm ² ... 1 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve	0.25 mm ² ... 1.5 mm ²
2 conductors with same cross section, solid	0.14 mm ² ... 0.75 mm ²
2 conductors with same cross section, stranded	0.14 mm ² ... 0.75 mm ²
2 conductors with same cross section, stranded, with ferrule without plastic sleeve	0.25 mm ² ... 0.5 mm ²
2 conductors with the same cross section flexible with TWIN ferrule and plastic sleeve	0.5 mm ² ... 0.75 mm ²
Stripping length	6 mm
Tightening torque	0.5 Nm ... 0.6 Nm

4.3 Connection capacity AWG

Conductor cross section AWG	26 ... 16
-----------------------------	-----------

5 Material properties**5.1 Material of metal parts**

Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy

1161119 MKDSN 1,5/ 3-5,08 MCBD:+-S

Terminal point surface	Nickel (2 - 3 µm Ni) , Tin (5 - 7 µm Sn)
Soldering area surface	Nickel (2 - 3 µm Ni) , Tin (5 - 7 µm Sn)
Surface characteristics	Tin-plated

5.2 Material of plastic parts


	Housing
Color	green (6021)
Insulating material	PA
Insulating material group	I
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Glow wire flammability index GWFI according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

1161119 MKDSN 1,5/ 3-5,08 MCBD:+-S**6 Dimensions****6.1 Dimensions for the product**

Length	8.1 mm
Width	15.24 mm
Height (without solder pin)	10 mm
Total height	13.5 mm
Solder pin [P]	3.5 mm

1161119 MKDSN 1,5/ 3-5,08 MCB D:+-S

7 Series drawing

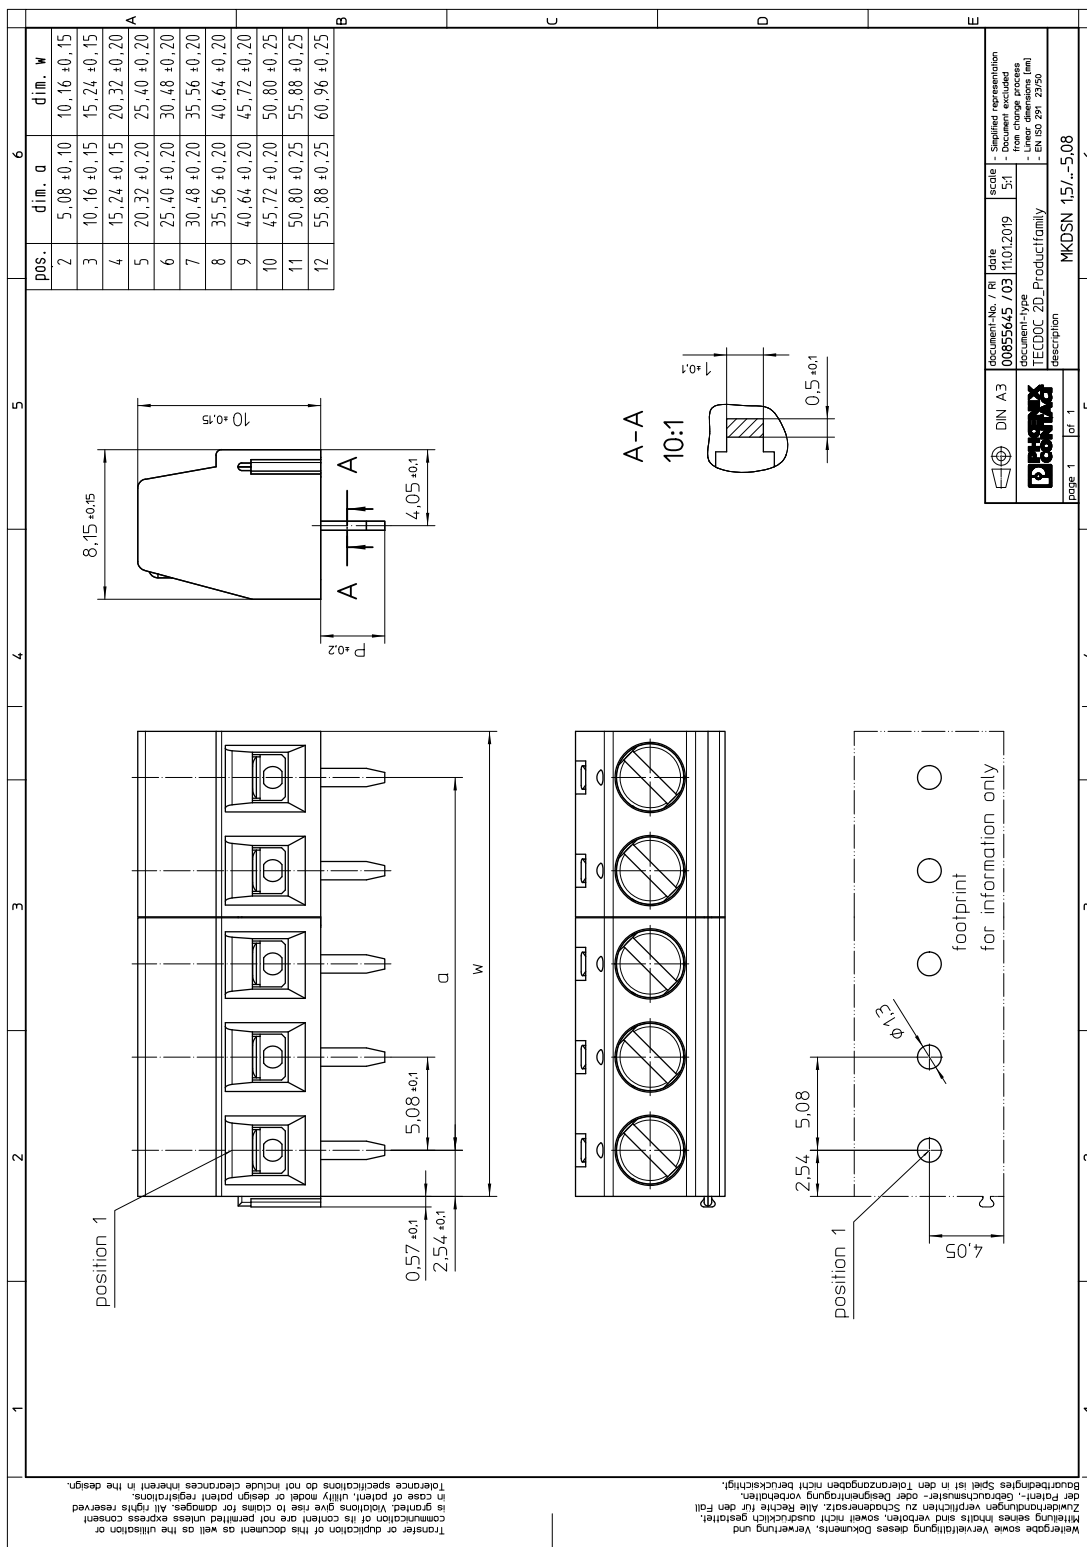

1161119 MKDSN 1,5/ 3-5,08 MCBD:+-S**8 Product notes****8.1 General information**

Note on application

For safe conductor connection, always adhere to a defined tightening torque. Particularly in the case of PCB terminal blocks with two or three positions, the individual solder pin for each contact point cannot compensate for this. That is why the terminal blocks must be supported during conductor connection (held with one hand, support on the housing).

8.2 Dimensions for PCB design

Hole diameter

1.3 mm

Pin dimensions

0.5 x 1 mm

9 Application**10 Packaging information**

Type of packaging

packed in cardboard

Pieces per package

250

10.1 Temperature limit values

Ambient temperature (storage/transport)

-40 °C ... 70 °C

Ambient temperature (assembly)

-5 °C ... 100 °C

Ambient temperature (operation)

-40 °C ... 100 °C (Depending on the current carrying capacity/derating curve)

1161119 MKDSN 1,5/ 3-5,08 MCBD:+-S**11 Mechanical tests****11.1 Pull-out test**

Specification	IEC 60999-1:1999-11
Result	Test passed
Conductor cross section/conductor type/tractive force actual value	0.14 mm ² / flexible / > 10 N
Conductor cross section/conductor type/tractive force actual value	0.14 mm ² / solid / > 10 N
Conductor cross section/conductor type/tractive force actual value	1.5 mm ² / flexible / > 40 N
Conductor cross section/conductor type/tractive force actual value	1.5 mm ² / solid / > 40 N

11.2 Check for damage to conductor or loosening

Specification	IEC 60999-1:1999-11
Result	Test passed

1161119 MKDSN 1,5/ 3-5,08 MCB D:+-S**12 Electrical tests****12.1 Electrical data**

Rated current / conductor cross section	13.5 A / 1.5 mm ²
Rated insulation voltage (III/2)	400 V
Rated surge voltage (III/2)	4 kV
Contact resistance	1.7 mΩ
Degree of pollution	2

12.2 Air and creepage distances

Component	PCB terminal block		
Specification	IEC 60947-1:2007-06 + A1:2010-12 + A2:2014-09		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	250 V	400 V	630 V
Rated surge voltage	4 kV	4 kV	4 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	3 mm	3 mm	3 mm
Minimum value of the creepage path requirement in acc. with table	3.2 mm	2 mm	3.2 mm

12.3 Short-time withstand current test

Specification	IEC 60947-7-4:2013-08
Result	Test passed
Conductor cross section/short-time current	1.5 mm ² / 60 A

12.4 Aging test (climatic impact and corrosion testing)

Specification	IEC 60947-7-4:2013-08
Result	Test passed
Contact resistance R ₁	1.7 mΩ / 1.5 mm ²
Test sequence 1: low temperature storage	-40 °C / 2 h
Test sequence 2: heat storage	168 h/100°C
Test sequence 3: noxious gas storage (ISO 6988)	KFW 0.2 S/1 cycle
Contact resistance R ₂	1.7 mΩ / 1.5 mm ²
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 μs)	
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)	3.1 kV

12.5 Insulation resistance

1161119 MKDSN 1,5/ 3-5,08 MCBD:+-S

Specification	IEC 60512-3-1:2002-02
Result	Test passed
Insulation resistance, neighboring positions	> 0.2 TΩ

12.6 Mechanical connection test for the PCB terminal block

Specification	IEC 60947-7-4:2013-08
Result	Test passed

12.7 Temperature rise test


Specification	IEC 60947-7-4:2013-08
Result	Test passed
Requirement temperature-rise test	The sum of ambient temperature and temperature rise of the PCB terminal block shall not exceed the upper limiting temperature.
Conductor cross section/test current/temperature rise	1.5 mm ² / 13 A / 32.5 K

1161119 MKDSN 1,5/ 3-5,08 MCBD:+-S

13 Current carrying capacity/derating curves

Specification	IEC 60947-7-4:2013-08
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	1
Number of positions	4
Conductor cross section	1.5 mm ²

Type: MKDSN 1,5/...

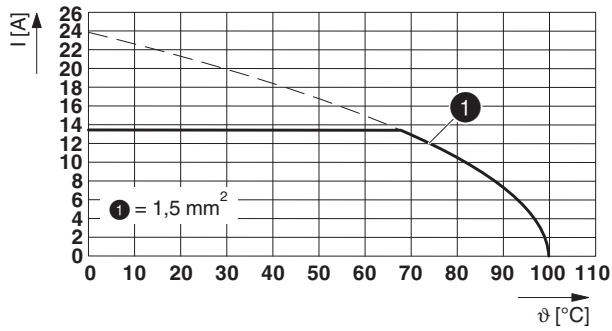


1161119 MKDSN 1,5/ 3-5,08 MCBD:+-S**14 Environmental and durability tests****14.1 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Note	

14.2 Assessment of fire risk (glow wire test)

Specification	IEC 60695-2-10:2013-04		
Result	Test passed		
Temperature	850 °C		
Time of exposure	5 s		

1161119 MKDSN 1,5/ 3-5,08 MCBD:+-S**15 Approvals / Certificates**

EAC ENEC				
cULus Recognized 				
	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
Usegroup B				
	300 V	10 A	30 - 14	-
Mehrleiteranschluss	300 V	10 A	2x - 18	-
Usegroup D				
	300 V	10 A	30 - 14	-
Mehrleiteranschluss	300 V	10 A	2x - 18	-

1161119 MKDSN 1,5/ 3-5,08 MCBD:+-S**16 Commercial Data**

Order No.	1161119
Type	MKDSN 1,5/ 3-5,08 MCBD:+-S
Pieces per package	250
Net weight	2.688 g
GTIN	4063151169558
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

17 Accessories

Description	Order No.	Type
Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip	1205053	SZS 0,6X3,5