


Advantages

- Fastenings at angles up to 30° per side
 - Quick feeding of the key into the screw thanks to feeding from various angles
 - The key does not slip out of the screw, which reduces the risk of accidents
 - No deformation of the screw head thanks to precision fitting of the ball end
- Fastenings at angles up to 25° per side
 - Higher torque transmission due to maximum core diameter
 - Elongated profile positioning for further use of the L-key
- Thanks to the combination of MagicRing® with the Wiha ball end, inserting and removing screws is possible, even in hard-to-reach locations
 - Securely holds screws made of steel and non-magnetic materials such as stainless steel, titanium, aluminium and plastics in any position
 - Can be used for all standard screws
 - Use for applications in which magnetised fastening tools cannot and may not be used (magnetic environment)!
 - Fastenings at angles up to 25° per side
- Securely holds screws made of steel and non-magnetic materials such as stainless steel, titanium, aluminium and plastics in any position
 - TORX® and TORX PLUS® screws manufactured according to Camcar Textron specifications
 - Use for applications in which magnetised fastening tools cannot and may not be used (magnetic environment)!
- Reduction of the short L-key arm, especially for hard-to-reach screws and confined spaces
 - Increase in the hand working space of over 30% and thus a reduction of the risk of injury to the knuckles and fingertips thanks to a 95° bend of the L-key
 - Improved access through a reduction of the L-key head height of up to 15%
 - Ball end geometry enables fastening at an angle of up to 25°
- Handles and holders in the same colour depending on the output size
 - This provides an overview of the tool assortment

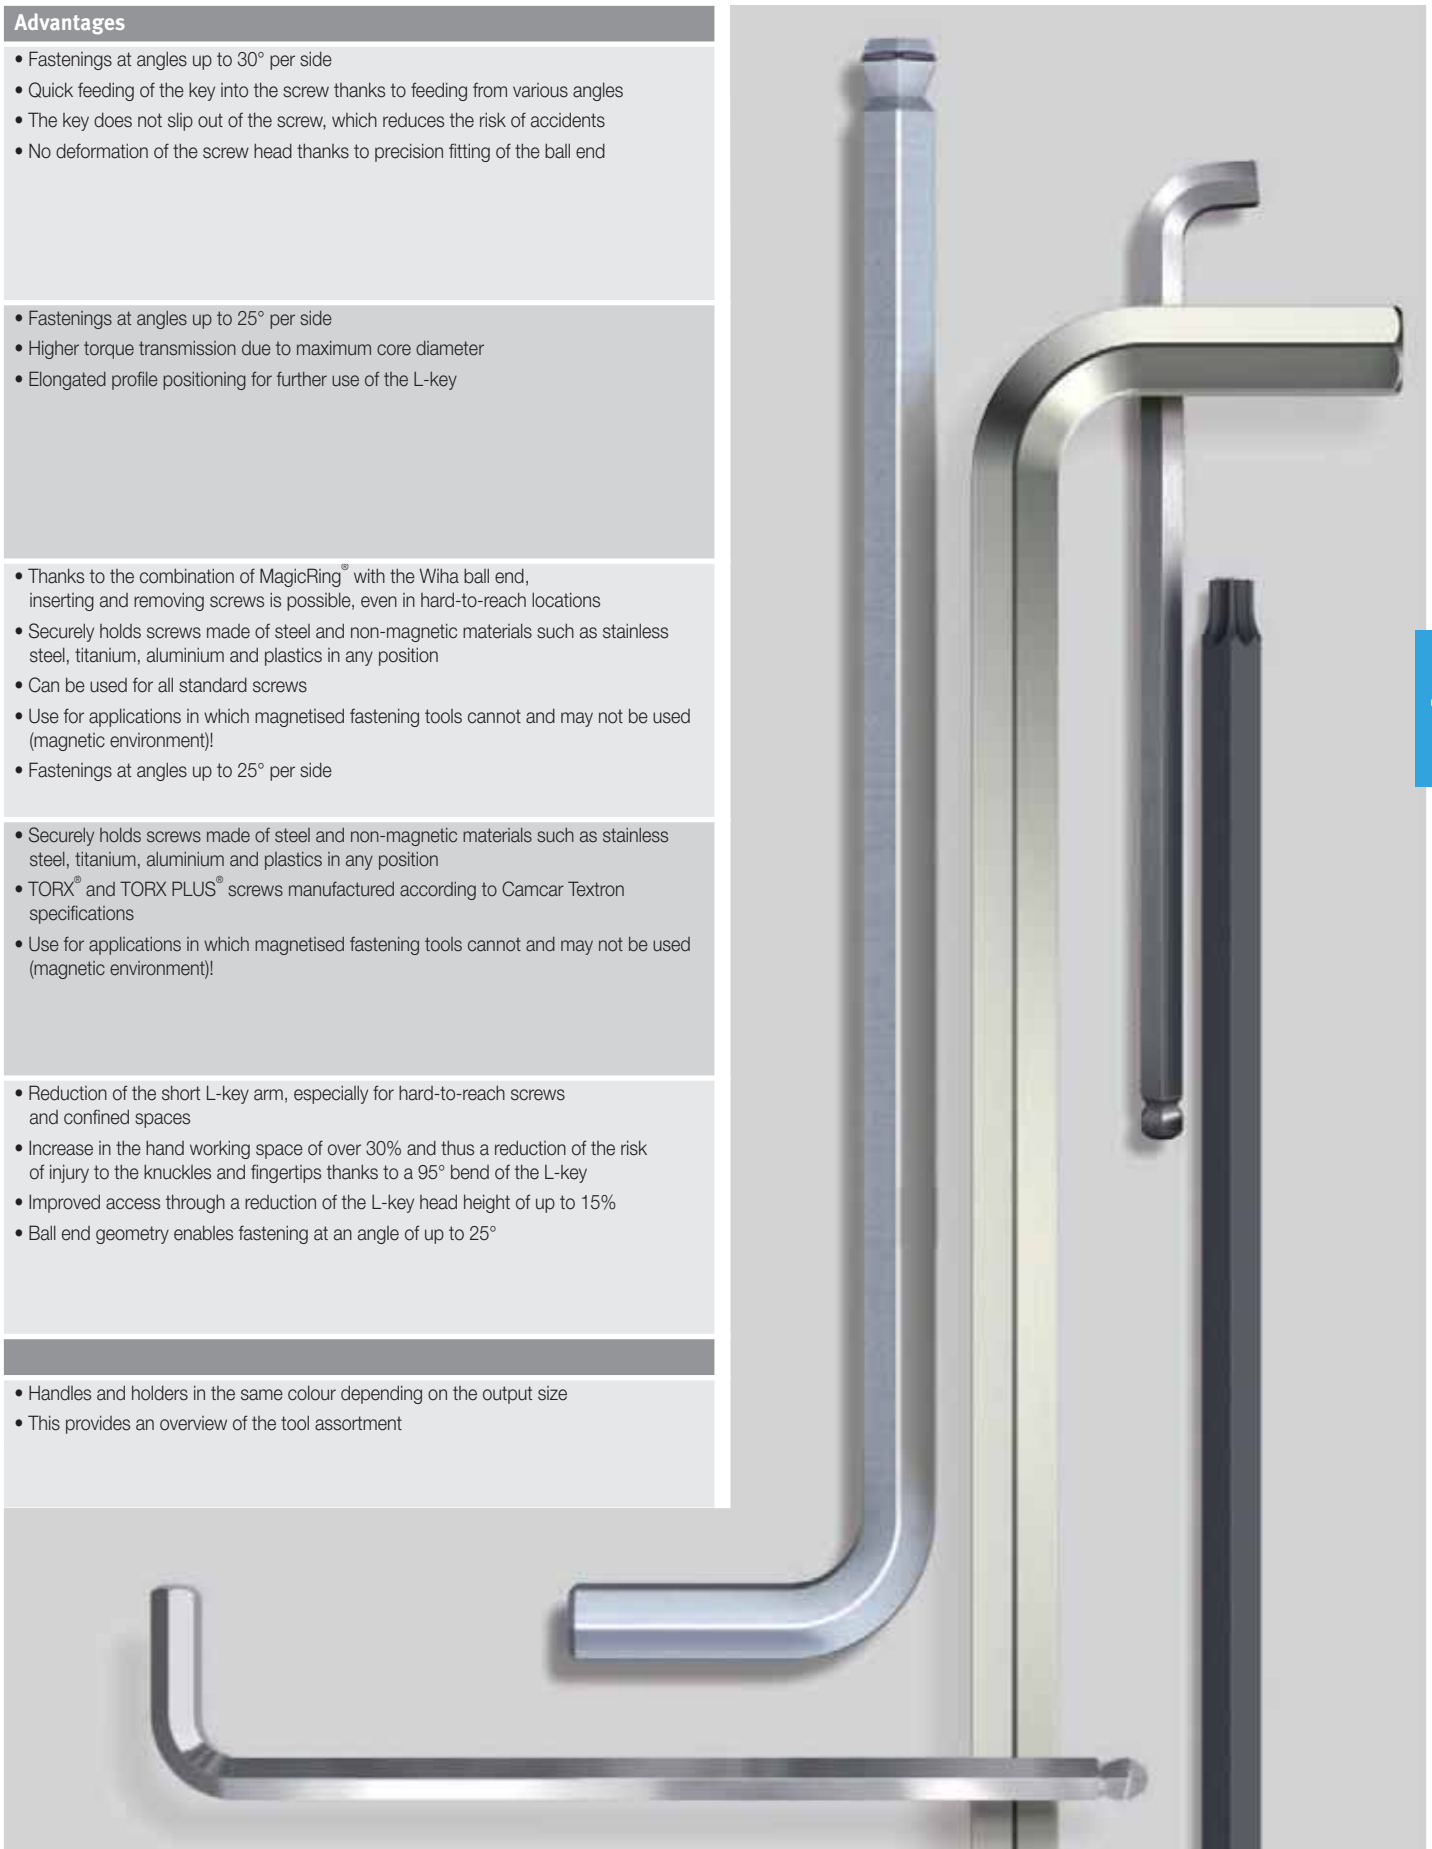

Wiha hexagon L-key (metric).

For Allen screws (metric).



369 H11 Hexagon ball end L-key set in Compact holder. Chrome-plated, 11 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Thanks to its compact form the Wiha Compact holder fits perfectly into any folding rule pocket.
The ball end enables the user to work at angles up to 25°. Including SW 7 and SW 9 special sizes.

Order-No.	Series								
36453	369 H11								5
	● 369	1.5	2	2.5	3	4			
		5	6	7	8	9	10		

SB 369 H11 Hexagon ball end L-key set in Compact holder. Chrome-plated, 11 pcs. Blister packed.

Order-No.	Series								
36454	SB 369 H11								5
	● 369	1.5	2	2.5	3	4			
		5	6	7	8	9	10		



369 H9 Hexagon ball end L-key set in Compact holder. Chrome-plated, 9 pcs.


Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Thanks to its compact dimensions, this holder fits easily into every ruler pocket.
Popular key sizes kept in a well-organised holder.
The ball end enables the user to work at angles up to 25°.

Order-No.	Series								
01418	369 H9								5
	● 369	1.5	2	2.5	3	4			
		5	6	8	10				

SB 369 H9 Hexagon ball end L-key set in Compact holder. Chrome-plated, 9 pcs. Blister packed.

Order-No.	Series								
02292	SB 369 H9								5
	● 369	1.5	2	2.5	3	4			
		5	6	8	10				

For Allen screws (metric).

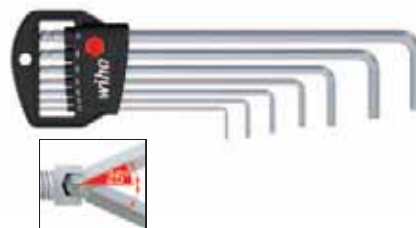

369 H7 Hexagon ball end L-key set in Classic holder. Chrome-plated, 7 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.
The ball end enables the user to work at angles up to 25°.

Order-No.	Series								
01416	369 H7								5
	● 369	1.5	2	2.5	3	4	5	6	

SB 369 H7 Hexagon ball end L-key set in Classic holder. Chrome-plated, 7 pcs. Blister packed.

Order-No.	Series								
03723	SB 369 H7								10
	● 369	1.5	2	2.5	3	4	5	6	



369 B8 Ball end hex L-key set in sliding box. Chrome-plated, 8 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Especially for screws that are difficult to access.
Extra: Large, impact resistant sliding box.
The ball end enables the user to work at angles up to 25°.

Order-No.	Series									
01410	369 B8									5
	● 369	2	2.5	3	4	5	6	8	10	