

Signal lamps with lamp socket - E 14, 30.5 mm



Technical Data

General information

Form of lens	round
Colour of lens	see order block
Diameter of collar	36 mm

Dimensions

Overall height	see order block
Mounting depth	58 mm
Mounting hole	30,5 ^{+0,5} mm

Mechanical design

Mounting	ring nut
Terminals	quick connector for 2 x 2.8 x 0.8 mm
Lamp socket	E 14
Lamp	filament lamp

Electrical characteristics

Voltage limit max.	250 V
Power limit max.	5 W

Other specifications


Degree of protection from front side	see order block
Weight	40 g

Typical accessories Signal lamps with lamp socket - E 14, 30.5 mm

Description	Photo	Order no.	Additional accessories see page
Filament lamp, E 14 base, 24 - 30 V		1.90.020.033/0000	5 - 10
Filament lamp, E 14 base, 24 V		1.90.020.053/0000	5 - 11
Filament lamp, E 14 base, 220 - 260 V		1.90.020.061/0000	5 - 11
Filament lamp, E 14 base, 24 - 30 V		1.90.020.105/0000	5 - 11
Filament lamp, E 14 base, 220 - 260 V		1.90.020.115/0000	5 - 11
Protection against contact to VBG 5		5.50.240.065/0200	5 - 25
Protective sleeve for terminals		5.52.011.031/0100	
Fixing spanner M 25, M 30		5.58.002.020/0105	5 - 21

The filament lamps 1.90.020.105/0000 and 1.20.090.115/0000 can only be used in combination with the lens form 2. Because of their height, they support the best illumination of this lens shape.

Signal lamps with lamp socket - E 14, IP40, 30.5 mm

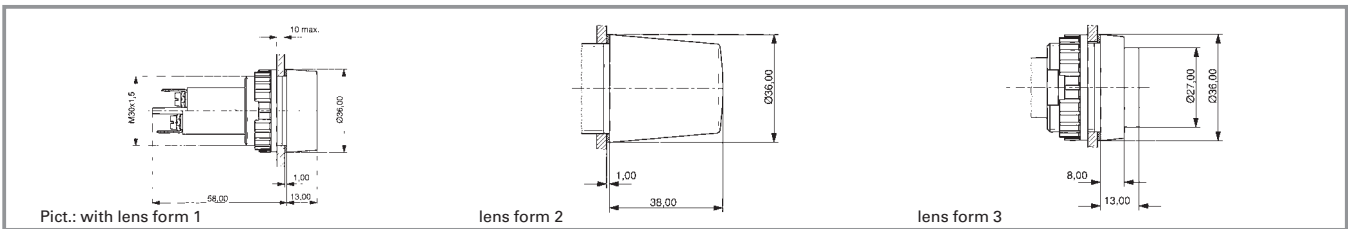

Voltage limit max.	Power limit max.	Degree of protection from front side	Order no. without lens	Note
250 V	5 W	IP40	1.61.021.099/0000	Please include the desired lens in your order.

Technical data see page 3 - 96

Lenses:

- Screw-on lens, form 3, transparent colourless: 5.00.350.013/1002
- Screw-on lens, form 3, transparent red: 5.00.350.013/1301
- Screw-on lens, form 3, transparent yellow: 5.00.350.013/1402
- Screw-on lens, form 3, transparent green: 5.00.350.013/1502
- Screw-on lens, form 1, transparent colourless: 5.49.233.005/1002
- Screw-on lens, form 1, transparent red: 5.49.233.005/1301
- Screw-on lens, form 1, transparent yellow: 5.49.233.005/1402
- Screw-on lens, form 1, transparent green: 5.49.233.005/1502
- Screw-on lens, form 2, transparent colourless: 5.49.233.008/1002
- Screw-on lens, form 2, transparent red: 5.49.233.008/1301
- Screw-on lens, form 2, transparent yellow: 5.49.233.008/1402
- Screw-on lens, form 2, transparent green: 5.49.233.008/1502

Single-wire screw terminal with clamp: 2 x 0.75 to 2.5 mm², stranded core with wire end sleeve: 2 x 0.75 to 1.5 mm², quick-connect terminal suitable for 2 x 2.8 x 0.8 tin-plated for soldering.