



PCB hybrid header - PCH 6/ 4+4-G1L4-7,62 BK - 1717137

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB hybrid header, nominal current: 41 A, rated voltage (III/2): 630 V, number of positions: 8, pitch: 7.62 mm, color: black, contact surface: Tin

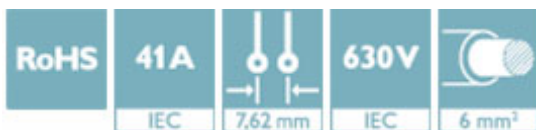

Key Commercial Data

Packing unit	50 pc
Minimum order quantity	50 pc
GTIN	 4 055626 514987
GTIN	4055626514987
Weight per Piece (excluding packing)	13.870 g
Custom tariff number	85366930
Country of origin	China

Technical data

Item properties

Number of positions	8
Pin layout	Linear pinning

Dimensions for the product

Length [l]	28.2 mm
Width [w]	47.25 mm
Height [h]	19 mm
Pitch	7.62 mm
Height (without solder pin)	16.4 mm
Solder pin [P]	2.6 mm

Packaging information

Type of packaging	packed in cardboard
Pieces per package	50
Denomination packing units	Pcs.

PCB hybrid header - PCH 6/ 4+4-G1L4-7,62 BK - 1717137

Technical data

Air clearances and creepage distances

Voltage	630 V
---------	-------

Classifications

eCl@ss

eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402
eCl@ss 9.0	27440402

ETIM

ETIM 5.0	EC002637
ETIM 6.0	EC002637

Accessories

Accessories

Coding element

Coding profile - CP-PC RD - 1701967



Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red

Additional products

PCB hybrid connector - LPCH 6/ 4+4-STL4-7,62 - 1716987



PCB hybrid connector, nominal current: 41 A, rated voltage (III/2): 1000 V, number of positions: 8, pitch: 7.62 mm, connection method: Push-in spring connection, color: green, contact surface: Tin