

## SAI Passive SAI-8-F 3P M8 L 10M

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

### Similar to illustration



The new slim M8 line from Weidmüller. This range of products is characterised by the marking options at all connection positions. Even the 4-way distributor with 8-pole M12 has adequately large markers at all M8 connection positions. Furthermore, this distributor is shorter than many conventional M8 designs.

- Very narrow, short and flat M8 distributor.
- The range is supplied with 4 to 12 M8 connection positions, 3 or 4 poles.
- Hybrid variants of the M8 are also possible on request.
- The M8 line is equipped with transverse holes.

### General ordering data

Type	SAI-8-F 3P M8 L 10M
Order No.	<a href="#">1828670000</a>
Version	SAI Passive, Sensor-actuator passive distributor, M8, Fixed cable version, 10 m, Yes
GTIN (EAN)	4032248335312
Qty.	1 pc(s).

**SAI Passive**  
**SAI-8-F 3P M8 L 10M**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Width	24 mm	Width (inches)	0.945 inch
Height	144 mm	Height (inches)	5.669 inch
Depth	18.2 mm	Depth (inches)	0.717 inch
Net weight	865 g		

**Temperatures**

Operating temperature range, max.	80 °C	Operating temperature range, min.	-25 °C
Operating temperature, max.	80 °C	Operating temperature, min.	-25 °C
Operating temperature	-25 - 80°C	Ambient temperature	-25 °C...+70 °C

**Environmental Product Compliance**

REACH SVHC	Lead 7439-92-1
------------	----------------

**Connection data**

Sheathing stripping length	100 mm	Distributor outlet	Fixed cable version
----------------------------	--------	--------------------	---------------------

**Standards**

Certificate No. (cURus)	E92202
-------------------------	--------

**Electrical data**

Rated voltage, min.	10 V	Rated voltage, max.	30 V
Test voltage	1 kV	Max. current-carrying capacity per slot	2 A
Total current	6 A	Current per signal	1 A
Insulation strength	10 <sup>9</sup> Ω		

**General technical data**

Protection degree	IP68	Number of poles	3
Number of contact sockets	8	Connection thread	M8
Pollution severity	3	Fire behaviour	V-0
LED	Yes	LED initiator	Yes
LED colour for indicating operation	green	LED colour for I/O function	yellow

**Material data**

Housing main material	Pocan	Material of distributor	Plastic
Housing colour	grey, RAL 7032	Screw socket	Nickel-plated CuZn
Contact material	CuZn	Contact surface	Gold-plated
Contact carrier material	PBT (UL 94 V0)		

**Technical data cable**

Cable length	10 m	Suitable for cable carriers	Yes
Number of poles		Wire cross section	8 x 0.34 mm <sup>2</sup> + 2 x 0.75 mm <sup>2</sup>
	3	Shielded	No
O.D.	7.4 mm	Sheathing colour	black
Sheath material	PUR	Bending radius, min., moving	10 x cable diameter
Halogen	No		
Bending cycles	2 Mio		

Creation date January 24, 2020 3:25:13 PM CET

**Data sheet**

**SAI Passive  
SAI-8-F 3P M8 L 10M**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

**Classifications**

ETIM 6.0	EC002585	ETIM 7.0	EC002585
eClass 9.0	27-44-01-08	eClass 9.1	27-44-01-08
eClass 10.0	27-44-01-08	UNSPSC	30-21-18-01

**Approvals**

Approvals



ROHS Conform

**Downloads**

Brochure/Catalogue	<a href="#">CAT 8 SAI 15/16 EN</a> <a href="#">FL FIELDWIRING EN</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
Engineering Data	<a href="#">STEP</a>


**Data sheet**

**SAI Passive  
SAI-8-F 3P M8 L 10M**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

**Dimensioned drawing**

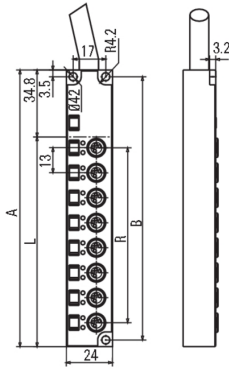

**Wiring diagram**

