
Multilevel installation terminal block; with operating slots and push-button; 2.5 mm²; with pivoting knife disconnect; LTi/L/PE; green-yellow lower deck; Push-in CAGE CLAMP®; 2,50 mm²; gray



https://www.wago.com/2203-6544



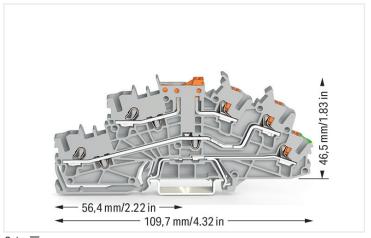

Color: gray

### Electrical data

| Ratings per IEC/EN            |                                                           |
|-------------------------------|-----------------------------------------------------------|
| Ratings (note)                | Potential – ground                                        |
| Nominal voltage (III/3)       | 250 V                                                     |
| Rated impulse voltage (III/3) | 4 kV                                                      |
| Rated current                 | 22 A                                                      |
| Ratings (note) 2              | Potential – potential                                     |
| Rated voltage (III/3) 2       | 400 V                                                     |
| Rated surge voltage (III/3) 2 | 6 kV                                                      |
| Rated current 2               | 27 A                                                      |
| Legend (ratings)              | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

| Connection data                   |   |  |
|-----------------------------------|---|--|
| Total number of connection points | 5 |  |
| Total number of potentials        | 3 |  |
| Number of levels                  | 3 |  |

| Connection 1                                               |                                                                                                                                   |  |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--|
| Connection technology                                      | Push-in CAGE CLAMP®                                                                                                               |  |
| Actuation type                                             | Push-in<br>Operating tool                                                                                                         |  |
| Connectable conductor materials                            | Copper                                                                                                                            |  |
| Nominal cross-section                                      | 2.5 mm²                                                                                                                           |  |
| Solid conductor                                            | 0.25 4 mm² / 22 12 AWG                                                                                                            |  |
| Solid conductor; push-in termination                       | 0.75 4 mm² / 18 12 AWG                                                                                                            |  |
| Fine-stranded conductor                                    | 0.25 4 mm² / 22 12 AWG                                                                                                            |  |
| Fine-stranded conductor; with insulated ferrule            | 0.25 2.5 mm² / 22 14 AWG                                                                                                          |  |
| Fine-stranded conductor; with ferrule; push-in termination | 1 2.5 mm² / 18 14 AWG                                                                                                             |  |
| Note (conductor cross-section)                             | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |  |
| Strip length                                               | 10 12 mm / 0.39 0.47 inch                                                                                                         |  |
| Wiring direction                                           | Front-entry wiring                                                                                                                |  |

https://www.wago.com/2203-6544



Connection 2

Actuation type 2 Push-in

Push-button

# Physical data

Width 5.2 mm / 0.205 inch Height 109.7 mm / 4.319 inch Depth from upper-edge of DIN-rail 46.5 mm / 1.831 inch

### Mechanical data

Potential marking LTi/L/PE Mounting type DIN-35 rail

Marking level Center/side marking

### Material data

Note (material data) Information on material data can be found here

Color

Polyamide (PA66) Insulation material

Flammability class per UL94 V0

Fire load 0.311 MJ

Weight 20.7 g

### Commercial data

PU (SPU) 50 Pieces Packaging type Box Country of origin VKOrg Germany DE

4055144070101 **GTIN** 

Customs tariff number VKOrg Germany 85369010000

### Approvals and certificates

### **Country specific Approvals**



Approval Standard Certificate name

C22.2 80093552 CSA

DEKRA Certification B.V.

https://www.wago.com/2203-6544



### **Downloads**

### **Environmental Product Compliance**

### Compliance Search

Environmental Product Compliance 2203-6544



### **Documentation**

### **Additional Information**

**Technical Section** 

pdf 2142.18 KB

 $\underline{\downarrow}$ 

### 1 Compatible products

### 1.1 Required accessories

### 1.1.1 End plate

### 1.1.1.1 End plate



### Item no.: 2203-6692

End and intermediate plate; 0.8 mm thick; orange

### 1.2 Optional accessories

### 1.2.1 DIN-rail

### 1.2.1.1 Mounting accessories



### tem no.: 210-196

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

# Item no.: 210-198

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

### Item no.: 210-197

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

### Item no.: 210-114

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored



### Item no.: 210-118

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

### Item no.: 210-115

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored

### Item no.: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

### Item no.: 210-113

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

### 1.2.2 Ferrule

### 1.2.2.1 Ferrule

# Item no.: 216-241

Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white

### Itom no : 216-242

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

### Item no : 216-262

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

### Item no.: 216-243

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

https://www.wago.com/2203-6544



### 1.2.2.1 Ferrule

### Item no.: 216-263

Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90: red



Ferrule; Sleeve for 1.5 mm<sup>2</sup> / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

# Item no.: 216-264

Ferrule; Sleeve for 1.5 mm2 / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

### Item no.: 216-246

Ferrule; Sleeve for 2.5 mm2 / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



### Item no.: 216-266

Ferrule; Sleeve for 2.5 mm<sup>2</sup> / AWG 14; insulated: electro-tin plated: electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue

### 1.2.3 Installation

### 1.2.3.1 Mounting accessories









### Item no.: 2009-304

Busbar carrier; not suitable for use as end stop; for DIN 35 rail; 1.5 mm thick; blue

### Item no.: 2009-305

Busbar carrier; with end stop function and detachable separator plate; for DIN 35 rail; 7.5 mm thick; blue

### Item no.: 709-169

Cover carrier; Type 3; gray

### Item no.: 709-156

Cover; Type 3; suitable for cover carrier, type 3; 1 m long; transparent

### 1.2.4 Insulation stop

### 1.2.4.1 Insulation stop





### Item no.: 2002-171

Insulation stop; 0.25 - 0.5 mm2; 5 pieces/ strip; light gray

### Item no.: 2002-172

Insulation stop; 0.75 - 1 mm²; 5 pieces/ strip; dark gray

### 1.2.5 Jumper

### 1.2.5.1 Jumper



### Item no.: 2002-400

Continuous jumper; 2-way; insulated; light gray

Item no.: 2002-423/000-006

Continuous jumper; from 1 to 3; insulated;

### Item no.: 2002-423

Continuous jumper; from 1 to 3; insulated; light gray



### Item no.: 2002-423/000-005

Continuous jumper; from 1 to 3; insulated; red



### Item no.: 2002-406/020-000

Delta jumper; insulated; light gray



### Item no.: 2002-410/000-006 Item no.: 2002-410

Jumper; 10-way; insulated; light gray Jumper; 10-way; insulated; blue





### Item no.: 2002-402/000-006

Jumper; 2-way; insulated; blue

### Item no.: 2002-402

Jumper; 2-way; insulated; light gray

# Item no.: 2002-402/000-005

Jumper; 2-way; insulated; red


### Item no.: 2002-403/000-006 Jumper; 3-way; insulated; blue

Jumper; 10-way; insulated; red



# Item no.: 2002-403

Jumper; 3-way; insulated; light gray



# Item no.: 2002-404/000-006

Jumper; 4-way; insulated; blue





Jumper; 5-way; insulated; light gray



# Item no.: 2002-404/000-005

Jumper; 4-way; insulated; red

Item no.: 2002-405/000-006 Jumper; 5-way; insulated; blue Item no.: 2002-405

Item no.: 2002-405/000-005 Jumper; 5-way; insulated; red

https://www.wago.com/2203-6544



### 1.2.5.1 Jumper









Item no.: 2002-406/000-006

Item no.: 2002-406 Jumper; 6-way; insulated; blue

Item no.: 2002-406/000-005 Jumper; 6-way; insulated; red Item no.: 2002-407/000-006 Jumper; 7-way; insulated; blue

Jumper; 6-way; insulated; light gray

Item no.: 2002-407

Jumper; 7-way; insulated; light gray

Item no.: 2002-408/000-006

Item no.: 2002-408 Jumper; 8-way; insulated; light gray Jumper; 8-way; insulated; blue

Item no.: 2002-408/000-005

Item no.: 2002-407/000-005

Jumper; 7-way; insulated; red

Item no.: 2002-409

Jumper; 8-way; insulated; red

Item no.: 2002-409/000-006 Jumper; 9-way; insulated; blue

Jumper; 9-way; insulated; light gray

Item no.: 2002-409/000-005

Jumper; 9-way; insulated; red

Item no.: 2002-440

Jumper; from 1 to 10; insulated; light gray

Item no.: 2002-433

Jumper; from 1 to 3; insulated; light gray

Item no.: 2002-434

Jumper; from 1 to 4; insulated; light gray

Item no.: 2002-435

Jumper; from 1 to 5; insulated; light gray

Item no.: 2002-436

Jumper; from 1 to 6; insulated; light gray

Item no.: 2002-437

Jumper; from 1 to 7; insulated; light gray

Item no.: 2002-438

Item no.: 2002-439

NIN COUNTY OF THE PERSON

Jumper; from 1 to 8; insulated; light gray NEW TOWNS

Jumper; from 1 to 9; insulated; light gray

Item no.: 2002-480

Staggered jumper; 10-way; insulated; light gray

Item no.: 2002-481

Staggered jumper; 11-way; insulated; light gray

Item no.: 2002-482

Staggered jumper; 12-way; insulated; light gray

Item no.: 2002-473/011-000 Staggered jumper; 2-way; from 1 to 3; in-

sulated; light gray

Item no.: 2002-472

Staggered jumper; 2-way; insulated; light gray

Item no.: 2002-473

Staggered jumper; 3-way; insulated; light gray

Item no.: 2002-475/011-000

Staggered jumper; 3-way; insulated; light gray

Item no.: 2002-474

Staggered jumper; 4-way; insulated; light

Item no.: 2002-475 Staggered jumper; 5-way; insulated; light gray

Item no.: 2002-476

Staggered jumper; 6-way; insulated; light

Item no.: 2002-477

Staggered jumper; 7-way; insulated; light

Item no.: 2002-478 Staggered jumper; 8-way; insulated; light

Item no.: 2002-479 Staggered jumper; 9-way; insulated; light gray

Item no.: 2002-477/011-000

Item no.: 2002-479/011-000

Staggered jumper; insulated; light gray

Staggered jumper; insulated; light gray

Continued on next page

Item no.: 2002-481/011-000

Item no.: 2002-405/011-000

Star point jumper; 3-way; insulated; light

Staggered jumper; insulated; light gray

Wire commoning chain; insulated; black

Item no.: 210-123

Wire commoning chain; insulated; blue

1.2.6 Marking

1.2.6.1 Group marker carrier



Item no.: 2009-192

Item no.: 2009-193 Group marker carrier; gray

Group marker carrier; gray

Page 5/8

Item no.: 2009-191

Group marker carrier; grav

Item no.: 210-103

Version 13.04.2022

### 1.2.6.2 Marker

### Item no.: 2009-145/000-006

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

### Item no.: 2009-145/000-007

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

### Item no.: 2009-145/000-023

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

### Item no.: 2009-145/000-012

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

### Item no.: 2009-145/000-005

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

### Item no.: 2009-145/000-024

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white


### Item no.: 2009-145/000-002

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



### Item no.: 248-501/000-006

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue



### Item no.: 248-501/000-023

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

### Item no.: 248-501/000-017

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green



### Item no.: 248-501/000-012

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange



### Item no.: 248-501/000-005

Item no.: 248-501/000-007

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

Mini-WSB marking card; as card; not

stretchable; plain; snap-on type; gray



### Item no.: 248-501/000-024

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

### Item no.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



### Item no.: 248-501/000-002

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

### Item no.: 793-5501/000-006

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; blue



### Item no.: 793-5501/000-014

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; brown

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; gray



### Item no.: 793-5501/000-017

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; green



### Item no.: 793-5501/000-023

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; light green

### Item no.: 793-5501/000-012

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; orange

### Item no.: 793-5501/000-005 WMB marking card; as card; for terminal

Item no.: 793-5501/000-007

block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; red



### Item no.: 793-5501/000-024

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; violet



# Item no.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; white

### Item no.: 793-5501/000-002

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; yellow

### Item no.: 793-501/000-006

WMB marking card; as card; not stretchable; plain; snap-on type; blue



# Item no.: 793-501/000-007

WMB marking card; as card; not stretchable; plain; snap-on type; gray



### Item no.: 793-501/000-023

WMB marking card; as card; not stretchable; plain; snap-on type; green

WMB marking card; as card; not stretcha-



### Item no.: 793-501/000-017

WMB marking card; as card; not stretchable; plain; snap-on type; light green




# Item no.: 793-501/000-012

WMB marking card; as card; not stretchable; plain; snap-on type; orange



# Item no.: 793-501/000-005

WMB marking card; as card; not stretchable; plain; snap-on type; red



Item no.: 2009-115/000-007

Item no.: 793-501/000-024

# Item no.: 793-501

WMB marking card; as card; not stretchable; plain; snap-on type; white



# Item no.: 793-501/000-002

WMB marking card; as card; not stretchable; plain; snap-on type; yellow



### Item no.: 2009-115/000-006

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



### Item no.: 2009-115/000-023

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



### Item no.: 2009-115/000-017

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green



### Item no.: 2009-115/000-012

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



# Item no.: 2009-115/000-005

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red

### Item no.: 2009-115/000-024

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet

### Item no.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

# Item no.: 2009-115/000-002

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snapon type; yellow

https://www.wago.com/2203-6544



### 1.2.6.3 Marker carrier



Item no.: 2009-198 Adaptor; gray

### 1.2.6.4 Marking strip



### Item no.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

### 1.2.7 Push-in type wire jumper

### 1.2.7.1 Jumper



### Item no.: 2009-414

Push-in type wire jumper; 1.5 mm²; insulated; 110 mm long; black



Push-in type wire jumper; 1.5 mm²; insulated; 110 mm long; black

# Item no.: 2009-416

Push-in type wire jumper; 1.5 mm<sup>2</sup>; insulated; 250 mm long; black

### Item no.: 2009-414/000-006

Push-in type wire jumper; insulated; 110 mm long; black

### Item no.: 2009-412

Push-in type wire jumper; insulated; 60 mm long; black

### 1.2.8 Test and measurement

# 1.2.8.1 Testing accessories



# Item no.: 2003-499

Test plug adapter N/L; for 2003-6641 and 2003-6640 Multilevel Installation Terminal Blocks; for vertical test slot; 2-pole; gray

# Item no.: 2003-500

Test plug adapter N; for 2003-6641 and 2003-6640 Multilevel Installation Terminal Blocks; for vertical test slot; 1-pole; gray

### Item no.: 2009-174

Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray

### Item no.: 210-136

Test plug; 2 mm Ø; with 500 mm cable; red

### Item no.: 2009-182

Testing tap; for max. 2.5 mm²; tool-free connection for individual test wires 0.08 - 2.5 mm; gray

### 1.2.9 Tool

### 1.2.9.1 Operating tool



Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured

### <u>Item no.: 210-720</u>

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

### Item no.: 2009-309

Operating tool;  $\overline{\text{Blades}}$ : 3.5 x 0.5 mm and 2.5 x 0.4 mm; for TOPJOB®S installation terminal blocks

### Item no.: 2009-310

Operating tool;  $\overline{\text{Blades}}$ : 3.5 x 0.5 mm and 5.5 x 0.8 mm; for TOPJOB $^{\circ}$ S installation terminal blocks; green

https://www.wago.com/2203-6544

# MAGO

### Installation notes

### Conductor termination



All conductor types at a glance



Conductor termination



Inserting a conductor via push-in termination

Solid conductors with cross-sections from either one size above, or up to two sizes below, the rated cross-section can be simply pushed in – no tools needed.



Inserting a conductor via operating tool. Connecting fine-stranded conductors without ferrules, or small cross-sectional conductors that cannot be pushed in, is performed similarly to the original CAGE CLAMP® – just use an operating tool.



Pivoting a knife disconnect.

### Commoning



Commoning two potentials in one single jumper slot via extremely slim staggered jumpers.



Removing a staggered jumper: Insert the operating tool between the staggered jumpers, then lift up the jumper.



The 1-to-3 adjacent jumper for continuous commoning enables every other terminal block to be commoned. For example, positive and negative potentials can be accommodated alongside each other



Adjacent Jumpers for Continuous Commoning (2002-400)

### **Testing**



Testing

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com

Page 8/8 Version 13.04.2022