



Item no.: 250-705  
 Product description: Double-deck PCB terminal strip 2 solder pins/pole, in line 5-pole Pin spacing 5 mm / 0.197 in with push-button with test port for 2.3 mm Ø test pin

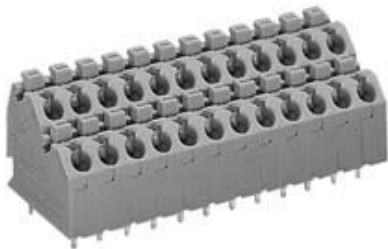

Produkt kann von Bild abweichen / product may differ

RoHS compliant

Product group	4 (Printed Circuit)
Pin spacing from	5 mm
Pin spacing from	0.197 in
Number of levels	2
pole count	5
Cross section [mm <sup>2</sup> ]	0.5 - 1.5 mm <sup>2</sup>
Cross section [AWG]	20 - 14 AWG
Wiring method	e
Connection method	PUSH WIRE®
Cross section to [mm <sup>2</sup> ]	0.5 mm <sup>2</sup>
Cross section to [AWG]	20 AWG
Wiring method	f
Cross section [mm <sup>2</sup> ]	0.75 - 1.5 mm <sup>2</sup>
Cross section to [AWG]	18 - 14 AWG
Wiring method	f
Measured voltage EN	400 V
Measured shock voltage	4 kV
Pollution degree	2

Current intensity EN  
Weight  
Color  
Wiring type

10 A  
9.7 g  
grey  
Angled Type



No. of connection Points	5
No. of potentials	5
Height	20.9 mm
Height	0.823 in
Width	26.2 mm
Width	1.031 in
Depth	21.7 mm
Depth	0.854 in
Strip length from	9 mm
Strip length to	9 mm
Strip length	0.35 in
Customs Tariff No.	85369010
Country of Origin	Schweiz

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected