


VPU PV I+II 3 1000

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Product image

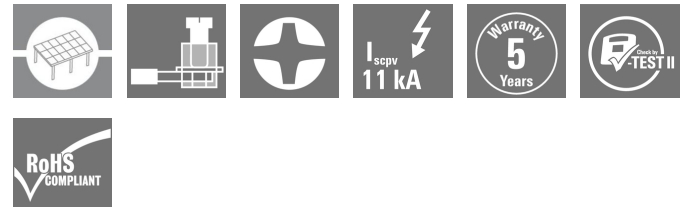

Similar to illustration

Type II surge voltage arrester for use in photovoltaic applications

- Pluggable arrester
- Suitable for protecting DC systems
- High energy absorption with short response time
- Tested in accordance with EN 50539-11
- Suitable for use in accordance with IEC 60364-7-712 / EN 50539-12
- Coded voltage level
- Installation in distribution board
- Thermal protection function

General ordering data

Version	Surge voltage arrester, Low voltage
Order No.	2530610000
Type	VPU PV I+II 3 1000
GTIN (EAN)	4050118540826
Qty.	1 pc(s).
Replacement parts	2530600000 2534300000

Creation date May 19, 2022 12:06:31 PM CEST

Catalogue status 06.05.2022 / We reserve the right to make technical changes.

VPU PV I+II 3 1000

Weidmüller Interface GmbH & Co. KG

 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	86 mm	Depth (inches)	3.386 inch
Height	96 mm	Height (inches)	3.78 inch
Width	54 mm	Width (inches)	2.126 inch
Mounting dimension - height	85 mm	Net weight	470 g

Temperatures

Storage temperature	-40 °C...85 °C	Operating temperature	-40 °C...85 °C
Humidity	5 - 95% rel. humidity		

Rated data UL

Certificate No. (UR)	E354261	Ambient temperature (operational), max. 85 °C	
Rated Voltage U_N	1,100 V	SCCR	50 kA
I_n	20 kA	Category	SPD TYPE 1CA
Rated current (UL)	1,100 V	Ambient temperature (operational), min. -40 °C	
Certificate No. (cURus)	E354261	VPR (DC+/DC-)	2,500 V
VPR (DC-/G)	2,500 V	Voltage type	DC

General data

Colour	black, orange	Design	Installation housing; 3TE, Insta IP 20
Operating altitude	≤ 2000 m	Optical function display	green = OK; red = arrester is defective - replace
Protection degree	IP20	Rail	TS 35
UL 94 flammability rating	V-0		

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Photovoltaic technical data

Discharge current I_n (8/20 μs)	20 kA	Discharge current, max. (8/20 μs)	40 kA
Lightning test current I_{imp} (10/350 μs)	6.25 kA	Operating height in the grounded PV system	≤ 2000 m
Operating height in ungrounded PV system	< 4,000 m, see operating instructions	PV system voltage, max. U_{cpv}	1,100 V
Protection level U_p (+/-, -/PE, +/-PE)	≤ 3.8 kV	Requirements class	Type I/II
Short-circuit current I_{SCPV}	11,000 A	Standards	EN 50539-11, UL 1449
Total discharge current I_{total} (8/20 μs)	50 kA	Total discharge current I_{total} (10/350 μs)	12.5 kA

Rated data IEC / EN

Discharge current, max. (8/20 μs)	40 kA	Leakage current at U_n	30 μA
Lightning test current I_{imp} (10/350 μs)	6.25 kA	Number of poles	3
Rated voltage (DC)	1000 V	Response time	≤ 25 ns
SPD type	T1, T2	Signalling contact	No
Standards	EN 50539-11, UL 1449	Voltage type	DC

VPU PV I+II 3 1000

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Connection data

Stripping length	18 mm	Type of connection	Screw connection
Stripping length, rated connection	18 mm	Tightening torque, min.	2 Nm
Tightening torque, max.	4.5 Nm	Clamping range, rated connection	16 mm ²
Clamping range, min.	1.5 mm ²	Clamping range, max.	35 mm ²
Wire cross-section, solid, min.	1.5 mm ²	Wire cross-section, solid, max.	16 mm ²
Wire connection cross section, finely stranded, min.	1.5 mm ²	Wire connection cross section, finely stranded, max.	25 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), min.	1.5 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), max.	25 mm ²
Connection cross-section, stranded, min.	1.5 mm ²	Connection cross-section, stranded, max.	35 mm ²

Ratings IECEx/ATEX/cUL

Certificate no. (cULus) E354261

Guarantee

Time interval 5 years

Classifications

ETIM 6.0	EC000941	ETIM 7.0	EC000941
ETIM 8.0	EC000941	ECLASS 9.0	27-13-08-05
ECLASS 9.1	27-13-08-05	ECLASS 10.0	27-13-08-05
ECLASS 11.0	27-13-08-05	ECLASS 12.0	27-17-90-90

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	EAC VPU SERIES CE_VPU_PV
Engineering Data	CAD data – STEP
Tender specification	Ausschreibungstext DE Tenderspecification EN
User Documentation	Beipackzettel / Instruction sheet
Catalogues	Catalogues in PDF-format


VPU PV I+II 3 1000

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

Electric symbol



Circuit diagram