

Wiha Torque VDE screwdrivers.

Precise with repeat accuracy.




product
design
award

2011



Focus Open
Silver 2011

slimTECHNOLOGY

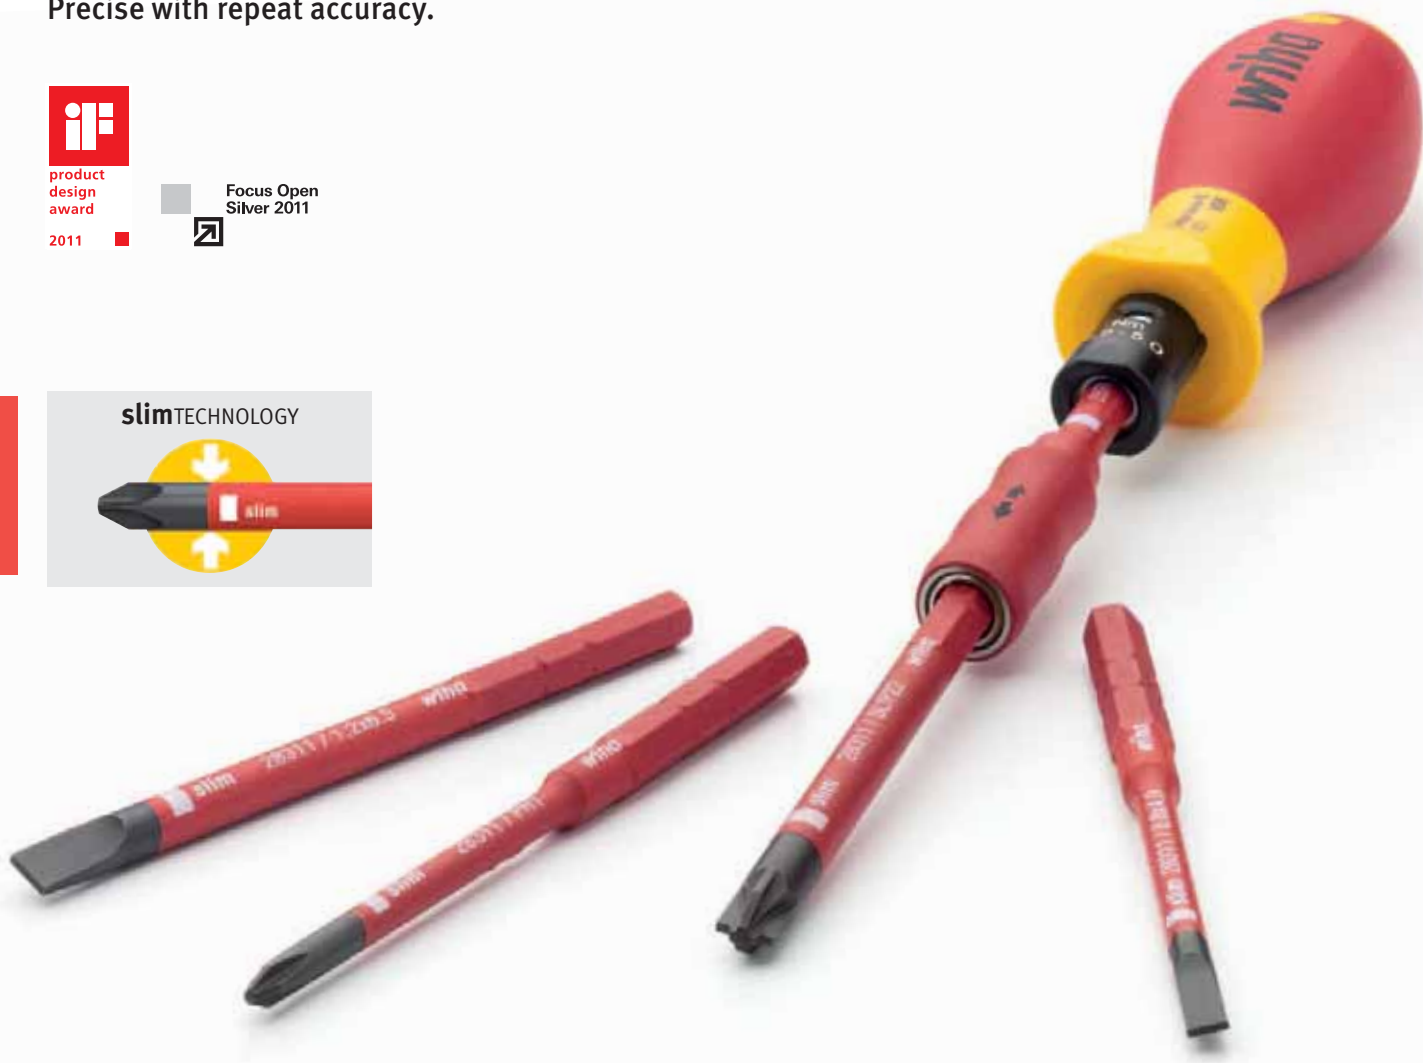

TorqueVario®-S VDE. Completely certified VDE torque system.

The TorqueVario®-S VDE with integrated scale in combination with the slimTorque VDE bit holder and slimBits offer controlled tightening of screws with simultaneous user safety fo



slimTECHNOLOGY:
Up to 33% narrower bits ensures unimpeded access to low-lying fastenings/ spring elements in the critical working area.



In type-tested switchgear systems, the torque to be observed is specified by all manufacturers.



Wiha Torque VDE screwdrivers.

- Clearly audible and perceptible click on attaining the pre-set torque
- Torque accuracy $\pm 6\%$ of the pre-set scale value
- Delivered with factory calibration certificate
- Safety when working with live equipment up to 1,000 V AC and 1,500 V DC
- Fulfills all accuracy requirements as defined by EN ISO 6789, BS EN 26789 and ASME B 107.14M



Wiha slimTorque VDE bit holder.

- Absolute safety even if mistakes are made: no metal connection between the bit holder and blade tang



Safety Notice:

When working with VDE tools, observe the national safety and accident prevention regulations!



TorqueVario®-S VDE. slimTorque VDE bit holder.

with scale



1000 V IEC 60900:2012

2872 TorqueVario®-S VDE torque screwdriver.
 Insulation up to 1,000 V AC, GS-mark.
Torque value can be set via window scale. Automatic release.

Handle: Torque infinitely adjustable with Torque-Setter setting tool (also supplied).
 Ergonomic multi-component handle, insulation up to 1,000 V AC, GS mark.
 Handle sizes proportioned to optimise torque setting.
 Audible and perceptible click when the pre-set torque has been attained.
 Compatible with all blades of the 2831 series in connection with the bit holder (2879 series).

Standards: Manufactured acc. to IEC 60900:2012.
 EN ISO 6798, BS EN 26789, ASME B107.14M.

Accuracy: ±6%, traceable to national standards.

Bit holder: slimTorque VDE bit holder (included in delivery) for 6 mm slimBits.

Application: For controlled fastening on live parts up to 1,000 V AC, for use only in combination with a slimTorque VDE bit holder for 6 mm slimBits.

Extra: Delivered in practical plastic box, incl. factory calibration certificate.

Individual: Products can be designed individually using the configurator at mytorque.wiha.com. (Can be chosen freely: text field, torque unit)

Order-No.	Nm	±%	Ø	mm	mm	mm
26625	0.6-2.0	6%	3.8	131	30	1
26626	1.0-5.0	6%	3.8	138	36	1
26627	2.0-8.0	6%	3.8	142	41	1



1000 V IEC 60900:2012

2879 slimTorque VDE bit holder for 6 mm slimBits.
 Insulation up to 1,000 V AC, GS-mark.
Exclusively for Wiha VDE torque screwdrivers.

Blade: High quality chrome-vanadium-molybdenum steel, through hardened, black-finish.
 Insulation moulded directly onto blade.

Standards: Manufactured acc. to IEC 60900:2012.

Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.
 Only for 6 mm slimBits.

Application: For use of Wiha 6 mm slimBits with Wiha VDE torque screwdrivers.

Attention: Not for use with bit styles C 6.3 and E 6.3.

Order-No.	Ø	mm	mm	mm	mm
35870	6	3.8	170	13	5

slimTorque starter set. Torque setter.

with scale



1000 V IEC 60900:2012

NEW
2872 S3 slimTorque starter set, 5-pcs.
Torque value can be set via window scale.
With slimTorque VDE bit holder for 6 mm slimBits.

Handle: VDE torque handle 1.0 - 5.0 Nm, steplessly adjustable with Torque Setter adjusting tool (included in delivery).

Bit holder: Insulated metal ClicFix bit holder locks all slimBits reliability.
 Only for 6 mm slimBits.

Bits: Protective insulation moulded directly onto the bit and completely integrated into the bit in the lower area.
 Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Application: For controlled fastening on live parts up to 1 000 V AC.

Extra: 100% safety from fastening with torque according to specification of manufacturer type-tested switching devices according to EN 60439-1.

Order-No.	Series	mm
38074	2872 S3	1
	2872	TorqueVario®-S VDE, model 1.0-5.0 Nm
	2879	slimTorque VDE bit holder for 6 mm slimBits
	285-900	Torque-Setter
⊕	2831-14	SL/PZ1x75 SL/PZ2x75



285-900 Torque-Setter.
Setting tool for variable torque screwdrivers.
Included in every torque screwdriver delivery.

Blade: Octagonal blade, through hardened, zinc-plated.

Supplement: Included in every torque screwdriver delivery.

Order-No.	mm	mm	mm
26864	150	80	1