

RAST

TE Internal #: 284865-4

Standard Edge Connectors, Wire-to-Board, 4 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Black, PBT

GF, Fully Loaded

View on TE.com >



Connectors > PCB Connectors > Card Edge Connectors > Standard Edge Connectors



Connector System: Wire-to-Board

Number of Positions: 4

Centerline (Pitch): 2.5 mm [.098 in]

Termination Method to Wire & Cable: Insulation Displacement (IDC)

Number of Rows: 1

Features

Product Type Features

Connector System	Wire-to-Board	
Connector & Housing Type	Receptacle	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Card Entry Style	Side	
Number of Insulation Displacement Slots	4	
Compatible With Wire & Cable Type	Discrete Wire	
Number of Positions	4	
Number of Rows	1	
Connector Contact Load Condition	Fully Loaded	
PCB Mount Orientation	Right Angle	
Electrical Characteristics		
Operating Voltage	63 VAC	
Body Features		
Keying Between Cavity Locations	1&2	

Standard

Connector Profile



Contact Features

Contact Retention Within Housing	Without
PCB Contact Termination Area Plating Material Thickness	$4-10~\mu m$
Contact Type	Socket
Contact Mating Area Plating Material	Pre-Tin
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	2 A

Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)

Mechanical Attachment

Mating Alignment Type	Keyed
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	With
Panel Mount Feature	Without
PCB Mount Retention	With
Connector Mounting Type	Board Mount

Housing Features

Housing Entry Configuration	Both Ends Closed
Centerline (Pitch)	2.5 mm[.098 in]
Housing Color	Black
Housing Material	PBT GF

Dimensions

Card Slot Depth	5 mm
Connector Height	7.35 mm
PCB Thickness (Recommended)	1.5 mm[.059 in]
Accepts Wire Insulation Diameter Range	1.3 – 2.1 mm[.05 – .08 in]
Wire Size	.22 – .35 mm²

Usage Conditions

Operating Temperature Range	-40 - 110 °C[-40 - 230 °F]
Operating remperature range	+0 110 C[+0 230 1]

Operation/Application

Circuit Application	Signal
1 1	\mathcal{S}



Packaging Features

Packaging Method	Tray
Packaging Quantity	364

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

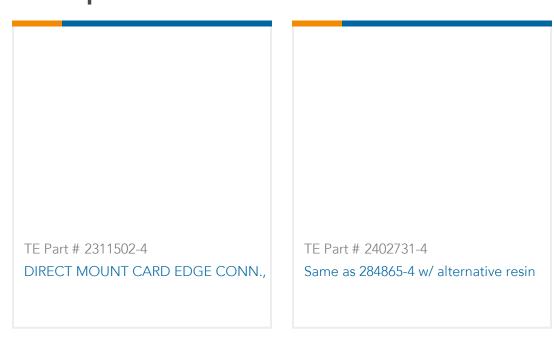

Customers Also Bought























Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_284865-4_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_284865-4_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_284865-4_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Datasheets & Catalog Pages
1654742_HOUSEHOLD_APPLIANCES_RAST5

English

Product Specifications

Standard Edge Connectors, Wire-to-Board, 4 Position, .098 in [2.5 mm] Centerline, Insulation Displacement (IDC), 1 Row, Black, PBT GF, Fully Loaded



Application Specification

English

Product Environmental Compliance

MD_284865-4_06052018121_dmtec

English

MD_284865-4_06052018121_dmtec

English

Agency Approvals

Agency Approval Document

English