
W31-X2M1G-1 <

Potter & Brumfield | Potter & Brumfield W23-31

TE Internal #: 3-1393247-1 Circuit Breakers, Thermal, Series Trip, Silver with Amp Rate Marking Toggle Color, 240 VAC Voltage Rating AC, Potter & Brumfield W23-31

View on TE.com >

Relays, Contactors & Switches > Circuit Breakers



Circuit Breaker Type: Thermal Circuit Function: Series Trip

Illuminated: No

Toggle Color: Silver with Amp Rate Marking

Voltage Rating AC: 240 VAC

Features

Product Type Features

Circuit Breaker Style	Toggle
Illumination Type	No Light
Product Type	Circuit Breaker



Actuator Type	Push-Pull, Toggle
Circuit Breaker Type	Thermal
Illuminated	No
Toggle Color	Silver with Amp Rate Marking
Configuration Features	
	.47 (Diameter) in
Earthing Switch	Without
Circuit Function	Series Trip
Electrical Characteristics	
Voltage Rating AC	240 VAC
Voltage Rating DC	50 VDC
Circuit Breaker Current Rating	1 A
Interrupt Capacity	1000A @ 50VDC or 120VAC
Contact Features	
Pole Configuration	1

W31-X2M1G-1

Circuit Breakers, Thermal, Series Trip, Silver with Amp Rate Marking Toggle Color, 240 VAC Voltage Rating AC, Potter & Brumfield W23-31



Trip Time a at 2009/	
Trip Time at 200%	11 – 30 seconds
Termination Features	
Circuit Breaker Termination Type	8-32 Screws 90° to Each Other
Mechanical Attachment	
Mounting Hardware Packaging	Assembled to Bushing
Mounting Options	Two Hex Nuts/Lockwasher
Mounting Bushing	15/32-32 Threaded Bushing .32" Long Double "D", Silver Color
Circuit Breaker Mounting Type	Panel Mount
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223)

Halogen Content

SVHC > Threshold:

Cadmium oxide (5.1% in Component Part)

Candidate List Declared Against: JUL 2021

Article Safe Usage Statements:

(219)

Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

W31-X2M1G-1

Circuit Breakers, Thermal, Series Trip, Silver with Amp Rate Marking Toggle Color, 240 VAC Voltage Rating AC, Potter & Brumfield W23-31





Also in the Series | Potter & Brumfield W23-31



Circuit Breakers(31)


Customers Also Bought









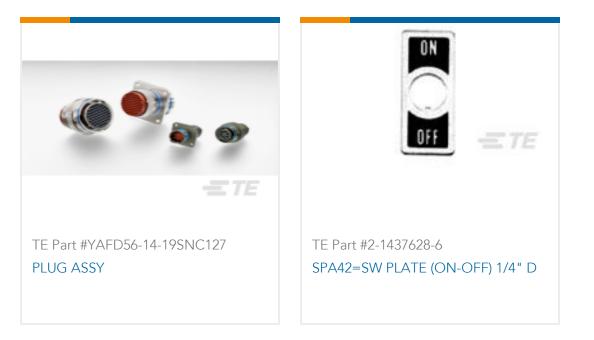

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1393247-1_C_c-3-1393247-1-c.2d_dxf.zip

W31-X2M1G-1

Circuit Breakers, Thermal, Series Trip, Silver with Amp Rate Marking Toggle Color, 240 VAC Voltage Rating AC, Potter & Brumfield W23-31



English Customer View Model ENG_CVM_CVM_3-1393247-1_C_c-3-1393247-1-c.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1393247-1_C_c-3-1393247-1-c.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages W23/31 Toggle or Pusl/Pull Actuator Thermal Circuit Breaker English Industrial Relays Quick Reference Guide English

Industrial Relays Quick Reference Guide

Japanese

Industrial Relays Quick Reference Guide

W23/W31 Series Datasheet

English