




Positive Lock | Positive Lock 250

TE Internal #: 341001-3

Positive Lock 250, Quick Disconnects, Receptacle, 13 – 11 AWG
 Wire Size, 2.62 – 4.17 mm² Wire Size, Mating Tab Width .25 in [6.35 mm], Straight, Brass

[View on TE.com >](#)

Terminals & Splices > Quick Disconnects

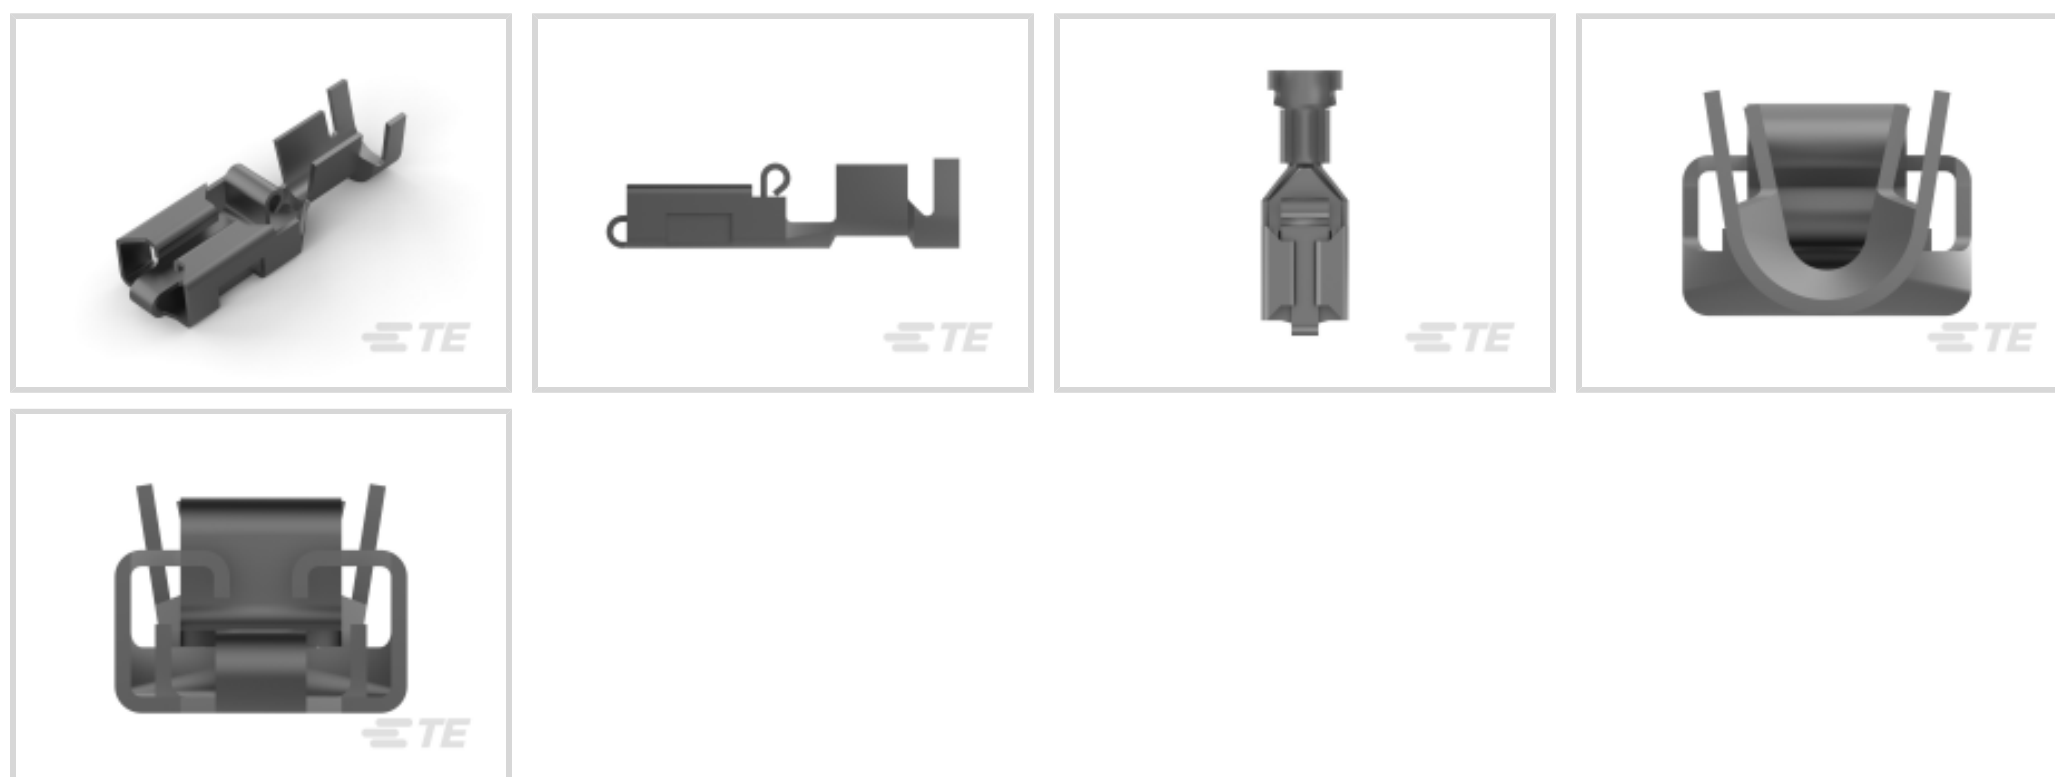

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **2.62 – 4.17 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Terminates To	Wire & Cable
Wire/Cable Type	FLK
Wire Stop	No
Insertion Force	Low
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp



Barrel Type	Open
-------------	------

Mechanical Attachment

Mating Retention Type	Dimple
Extraction Force	7 – 100 Newton
Wire Insulation Support	With

Dimensions

Accepts Wire Insulation Diameter Range	3.6 – 4.3 mm [.141 – .169 in]
Receptacle Terminal Stock Thickness	.41 mm [.016 in]
Overall Length	22.76 mm [.896 in]
Wire Size	2.62 – 4.17 mm ²

Usage Conditions

Insulation Requirement	Uninsulated
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

Industry Standards

UL Rating	Recognized
-----------	------------

Packaging Features

Packaging Quantity	500
Packaging Method	Loose Piece/Carton

Other

Comment	FLK-Wire: Normal Wire
---------	-----------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2022 (223) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC



Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 928901-3
PL 250 REC TERMINAL 17-13 AWG
TPBR LP



TE Part # 525651
DAHT POSITIVE LOCK 18-11 ASSY




TE Part # 928901-4
PL 250 REC TERMINAL 17-13 TPPB LP




TE Part # 1337265-1
POS LOCK RECEPTACLE GOLD


Also in the Series | Positive Lock 250

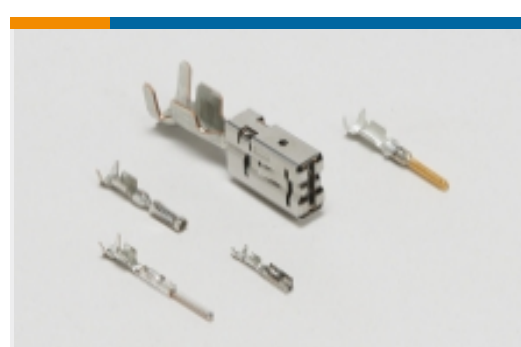

Automotive Terminals(1)




Crimp Terminal Housings(203)



Insertion & Extraction Tools(3)




Insulation Boots & Sleeves(4)

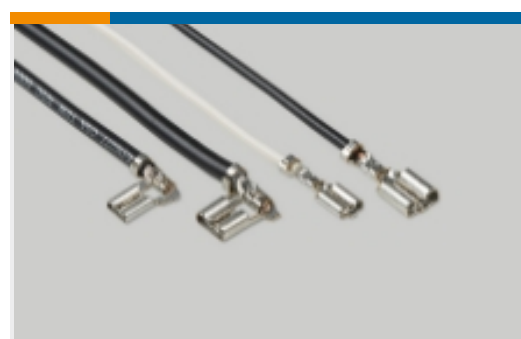

Quick Disconnects(189)


Customers Also Bought

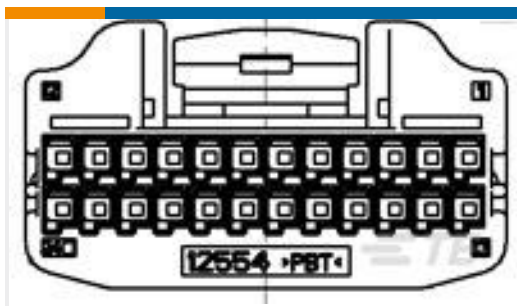

TE Part #1318917-1
025 ECU PLUG HSG ASSY 24P



TE Part #626062
FASTIN-ON HOUSING REC PA66
NATURAL

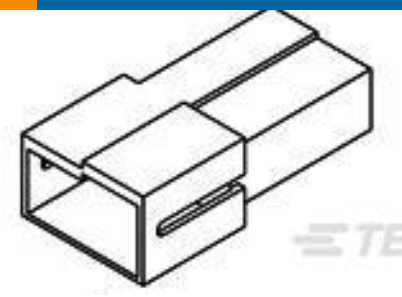

TE Part #626065
2 P FASTIN-ON 110 HOUSING TAB
PA66 NAT




TE Part #DT06-12SD-B016
DEUTSCH DT Series Housings &
Connectors



TE Part #1-968851-3
AMP MCP 2.8, CONTACT



TE Part #K1060643
Battery Disconnecter 35-222

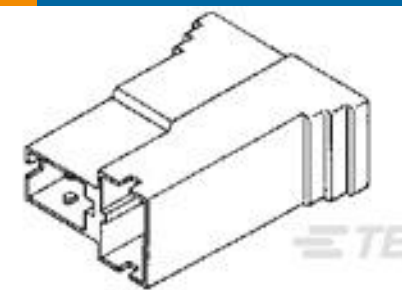

TE Part #926522-1
PL 250 REC HSG 2P NYLON BLACK



TE Part #K1126773
Knotenkette K12/1,2 SCHL020 KARABI.
12/50

Documents

Product Drawings

[PL 250 REC TERMINAL 13-11 TPBR LP](#)

English

[PL 250 REC TERMINAL 13-11 TPBR LP](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_341001-3_C.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_341001-3_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_341001-3_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1654742_HOUSEHOLD_APPLIANCES_RAST5](#)

English

Product Specifications

[Positive Lock](#)

English

341001-3

Positive Lock 250, Quick Disconnects, Receptacle, 13 – 11 AWG Wire Size, 2.62 – 4.17 mm² Wire Size, Mating Tab Width .25 in [6.35 mm], Straight, Brass



Product Specification

English