

Wiha MagicRing® hexagon L-key.

Securely holds hexagon bolts in place in any position.

MagicRing® holds all standard screws!

- DIN 6912
- DIN 7984
- DIN EN ISO 4762
- DIN EN ISO 10642
- DIN EN ISO 4026
- DIN EN ISO 4027
- DIN EN ISO 4028
- DIN EN ISO 4029
- DIN EN ISO 7380



Wiha hex keys with MagicRing® guarantee the perfect location of hex screws in every position.

Due to a high-quality retaining ring in the key head, the insertion of a screw in straight, inclined or very deep pocket holes is no problem. The new ball geometry with MagicRing® now offers even more advantages:

- Greater retention force for screws. For example, size 6 holds screws up to 1000 mm in length.
- Enlarged maximum torque of up to 10% due to the new ball geometry.
- Can now be used with all standard screws.

A further advantage is that the Wiha MagicRing® can even be used to hold non-magnetisable screws made of stainless steel, titanium and aluminium.



Wiha MagicRing® metric is only available as long design from size 3. With the inch dimensions, MagicRing® is available from 1/8". All series are made from high-quality chrome-vanadium steel.

Thanks to the Wiha MagicRing®, inserting and removing screws is safe and easy, even in areas that are difficult to access.




The ball end can be rotated by up to 25° in both clockwise and anti-clockwise direction.



Wiha MagicRing® hexagon L-key.

- Suitable for removing sunk-head standard screws and for inserting and working screws in horizontal, inclined or deep pocket holes
- Holds screws made of steel and non-magnetisable materials such as stainless steel, titanium and aluminium
- Ideal for applications where there is insufficient space for a simple hex key
- No troublesome searching for dropped screws

For Allen screws (metric).

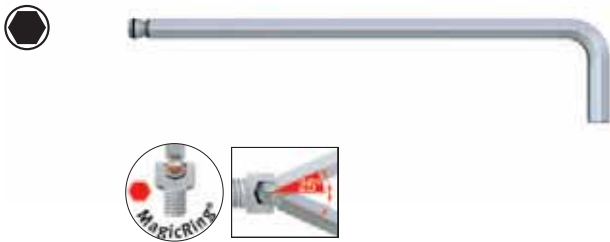

369R Ball end hex L-key, long.
With MagicRing®.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Insert screws into or remove from boreholes, especially in difficult to access areas.
Extra: MagicRing® of spring steel (from size 3 mm) secures all hex standard screws independently of screw material in any position. The ball end enables the user to work at angles up to 25°.

| Order-No. | ● | ↔ | ↙ ↘ | ↔ |
|-----------|----|-----|-----|----|
| 20549 | 3 | 128 | 23 | 10 |
| 20550 | 4 | 142 | 29 | 10 |
| 20570 | 5 | 163 | 33 | 10 |
| 20551 | 6 | 184 | 38 | 10 |
| 20552 | 8 | 206 | 44 | 10 |
| 20553 | 10 | 231 | 50 | 5 |

For Allen screws (metric).



NEW
369R H9 Hexagon ball end L-key set in ErgoStar holder.
With MagicRing®, chrome-plated, 9 pcs.

Blade: Chrome-vanadium steel, through hardened, chrome-plated.
Standards: Based on ISO 2936L.
Application: Insert screws into or remove from boreholes, especially in difficult to access areas.
Extra: Mechanical operation of the space-saving ErgoStar holder makes simplest removal of each individual L-key possible without movement of the others. MagicRing® of spring steel (from size 3 mm) secures all hex standard screws independently of screw material in any position. The ball end enables the user to work at angles up to 25°.

| Order-No. | Series | ↔ |
|-----------|---------|--------------|
| 37351 | 369R H9 | 5 |
| ● | 369 | 1.5 2 2.5 |
| ● | 369R | 3 4 5 6 8 10 |

NEW
SB 369R H9 Hexagon ball end L-key set in ErgoStar holder.
With MagicRing®, chrome-plated, 9 pcs.
Blister packed
With practical wall bracket.

| Order-No. | Series | ↔ |
|-----------|------------|--------------|
| 37352 | SB 369R H9 | 5 |
| ● | 369 | 1.5 2 2.5 |
| ● | 369R | 3 4 5 6 8 10 |



Wiha Info



Wiha MagicRing®.
Thanks to the Wiha MagicRing®, inserting and removing screws is safe and easy, even in areas that are difficult to access.