

CIRCUIT-BREAKER, SIZE S00, FOR MOTOR PROTECTION, CLASS 10, A REL. 1.4...2A, N REL. 26A, SCREW CONNECTION, STANDARD BREAKING CAPACITY W. TRANSV. AUX. SWITCH 1NO/1NC



Figure similar

| | |
|---|----------------------|
| product brandname | SIRIUS |
| Product designation | Circuit breaker |
| Design of the product | For motor protection |
| General technical data | |
| Size of the circuit-breaker | S00 |
| Size of contactor can be combined company-specific | S00 |
| Product extension | |
| • Auxiliary switch | Yes |
| Power loss [W] total typical | 6 W |
| Insulation voltage with degree of pollution 3 rated value | 690 V |
| Surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation | |
| • in networks with grounded star point between main and auxiliary circuit | 400 V |
| • in networks with grounded star point between main and auxiliary circuit | 400 V |
| Protection class IP | |

| | |
|---|--------------------|
| <ul style="list-style-type: none"> • on the front • of the terminal | IP20 IP00 |
| Mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> • of the main contacts typical • of auxiliary contacts typical | 100 000 100 000 |
| Electrical endurance (switching cycles) | |
| <ul style="list-style-type: none"> • typical | 100 000 |
| Type of protection | Increased safety |
| Protection against electrical shock | finger-safe |
| Equipment marking acc. to DIN EN 81346-2 | Q |

| Ambient conditions | |
|--|--|
| Installation altitude at height above sea level maximum | 2 000 m |
| Ambient temperature | |
| <ul style="list-style-type: none"> • during operation • during storage • during transport | -20 ... +60 °C -50 ... +80 °C -50 ... +80 °C |
| Temperature compensation | -20 ... +60 °C |
| Relative humidity during operation | 10 ... 95 % |

| Main circuit | |
|---|------------------------------------|
| Number of poles for main current circuit | 3 |
| Adjustable pick-up value current of the current-dependent overload release | 1.4 ... 2 A |
| Operating voltage | |
| <ul style="list-style-type: none"> • rated value • at AC-3 rated value maximum | 690 V 690 V |
| Operating frequency rated value | 50 ... 60 Hz |
| Operating current rated value | 2 A |
| Operating current | |
| <ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 400 V rated value | 2 A |
| Operating power | |
| <ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value | 370 W 750 W 750 W 1 100 W |
| Operating frequency | |
| <ul style="list-style-type: none"> • at AC-3 maximum | 15 1/h |

| Auxiliary circuit | |
|---------------------------------------|------------|
| Design of the auxiliary switch | transverse |

| | |
|---|--------|
| Number of NC contacts | |
| • for auxiliary contacts | 1 |
| — Note | 1 |
| Number of NO contacts | |
| • for auxiliary contacts | 1 |
| — Note | 1 |
| Number of CO contacts | |
| • for auxiliary contacts | 0 |
| Operating current of auxiliary contacts at AC-15 | |
| • at 24 V | 2 A |
| • at 110 V | 2 A |
| • at 120 V | 2 A |
| • at 125 V | 2 A |
| • at 230 V | 0.5 A |
| Operating current of auxiliary contacts at DC-13 | |
| • at 24 V | 1 A |
| • at 60 V | 0.15 A |

Protective and monitoring functions

| | |
|--|-----------|
| Trip class | CLASS 10 |
| Design of the overload release | thermal |
| Operational short-circuit current breaking capacity (Ics) at AC | |
| • at 240 V rated value | 100 000 A |
| • at 400 V rated value | 100 000 A |
| • at 500 V rated value | 10 000 A |
| • at 690 V rated value | 2 000 A |
| Maximum short-circuit current breaking capacity (Icu) | |
| • at AC at 240 V rated value | 100 kA |
| • at AC at 400 V rated value | 100 kA |
| • at AC at 500 V rated value | 10 kA |
| • at AC at 690 V rated value | 2 kA |
| Breaking capacity short-circuit current (Icn) | |
| • at 1 current path at DC at 150 V rated value | 10 kA |
| • with 2 current paths in series at DC at 300 V rated value | 10 kA |
| • with 3 current paths in series at DC at 450 V rated value | 10 kA |

UL/CSA ratings

| | |
|---|-----|
| Full-load current (FLA) for three-phase AC motor | |
| • at 480 V rated value | 2 A |
| • at 600 V rated value | 2 A |
| Yielded mechanical performance [hp] | |

| | |
|---|--|
| <ul style="list-style-type: none"> • for single-phase AC motor <ul style="list-style-type: none"> — at 230 V rated value • for three-phase AC motor <ul style="list-style-type: none"> — at 460/480 V rated value — at 575/600 V rated value | <p>0.125 hp</p> <p>0.75 hp</p> <p>1 hp</p> |
| Contact rating of auxiliary contacts according to UL | C300 / R300 |

Short-circuit protection

| | |
|---|--|
| Product function Short circuit protection | Yes |
| Design of the short-circuit trip | magnetic |
| Design of the fuse link <ul style="list-style-type: none"> • for short-circuit protection of the auxiliary switch required | fuse gG: 10 A, miniature circuit breaker C 6 A (short-circuit current $I_k < 400$ A) |
| Design of the fuse link for IT network for short-circuit protection of the main circuit <ul style="list-style-type: none"> • at 240 V • at 400 V • at 500 V • at 690 V | <p>none required</p> <p>gL/gG 35 A</p> <p>gL/gG 25 A</p> <p>gL/gG 25 A</p> |

Installation/ mounting/ dimensions

| | |
|--------------------------|--|
| Mounting position | any |
| Mounting type | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |
| Height | 90 mm |
| Width | 45 mm |
| Depth | 81 mm |

Connections/Terminals

| | |
|---|--|
| Product function <ul style="list-style-type: none"> • removable terminal for auxiliary and control circuit | No |
| Type of electrical connection <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control current circuit | <p>screw-type terminals</p> <p>screw-type terminals</p> |
| Arrangement of electrical connectors for main current circuit | Top and bottom |
| Type of connectable conductor cross-sections <ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — single or multi-stranded — finely stranded with core end processing | <p>2x (0,5 ... 1,5 mm²), 2x (0,75 ... 2,5 mm²), 2x (1 ... 4 mm²)</p> <p>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)</p> |
| Type of connectable conductor cross-sections <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — single or multi-stranded | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) |
| Tightening torque | |

| | |
|---|------------------------------------|
| <ul style="list-style-type: none"> • for main contacts with screw-type terminals • for auxiliary contacts with screw-type terminals | 0.8 ... 1.2 N·m 0.8 ... 1.2 N·m |
| Design of the thread of the connection screw | |
| <ul style="list-style-type: none"> • for main contacts • of the auxiliary and control contacts | M3 M3 |

Safety related data

| | |
|---|---------------|
| B10 value | |
| <ul style="list-style-type: none"> • with high demand rate acc. to SN 31920 | 5 000 |
| Proportion of dangerous failures | |
| <ul style="list-style-type: none"> • with low demand rate acc. to SN 31920 • with high demand rate acc. to SN 31920 | 50 % 50 % |
| Failure rate [FIT] | |
| <ul style="list-style-type: none"> • with low demand rate acc. to SN 31920 | 50 FIT |
| Display version | |
| <ul style="list-style-type: none"> • for switching status | Rocker switch |

Certificates/approvals

| General Product Approval | For use in hazardous locations |
|--------------------------|--------------------------------|
|--------------------------|--------------------------------|



| Declaration of Conformity | Test Certificates | Shipping Approval |
|---------------------------|-------------------|-------------------|
|---------------------------|-------------------|-------------------|



| Shipping Approval | other |
|-------------------|-------|
|-------------------|-------|



| other |
|-------|
|-------|



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RV1011-1BA15>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RV1011-1BA15>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1011-1BA15>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RV1011-1BA15&lang=en

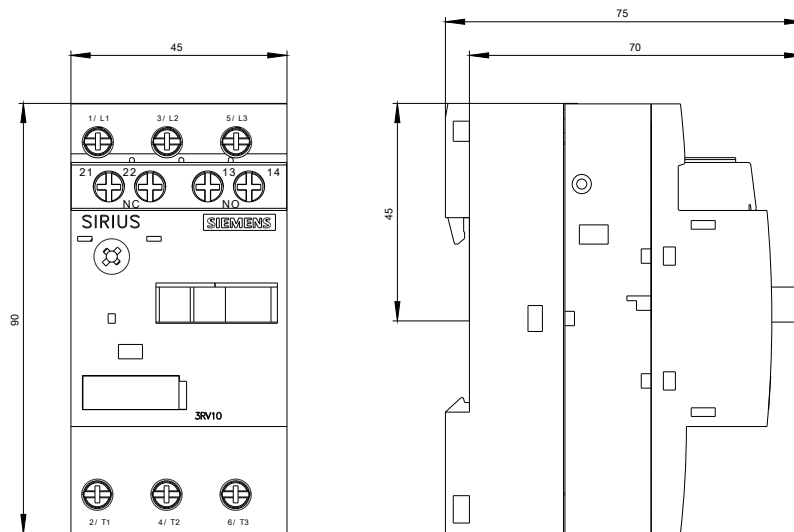

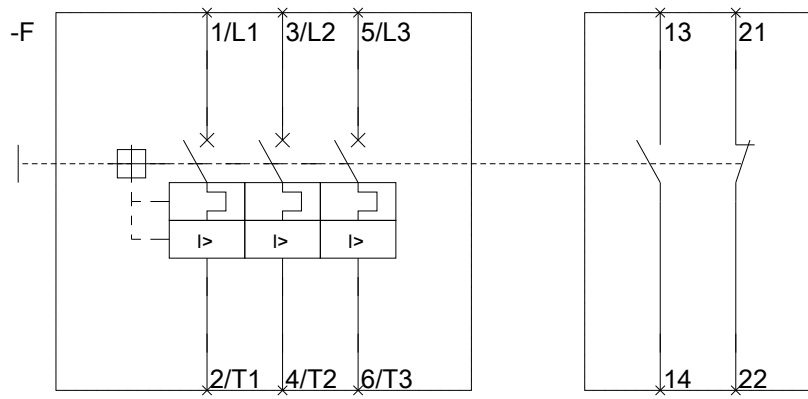

last modified:

02/08/2017