


Removable control terminals with spring-type terminals 2 blocks with 6 terminals each



Product designation	Removable control terminals
Design of the product	With spring-type terminals, contains 2 blocks each with 6 terminals
Manufacturer's article number	<ul style="list-style-type: none"> • of soft starter 3RW521.-3.C., 3RW522.-3.C., 3RW523.-2.C., 3RW52 • of soft starter 3RW551.-3HA., 3RW552.-3HA., 3RW553.-2HA., 3RW55

General Product Approval	Declaration of Conformity	Test Certificates
---------------------------------	----------------------------------	--------------------------

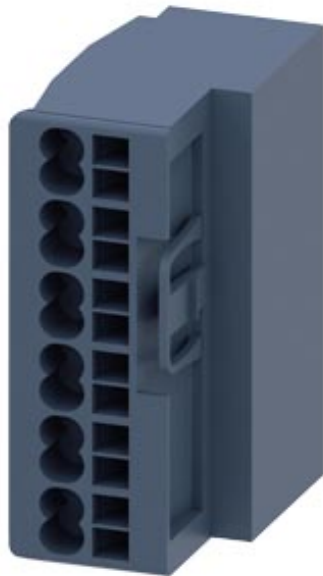

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

Marine / Shipping	other
--------------------------	--------------



LRS



PRS

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5980-2TR00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5980-2TR00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5980-2TR00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5980-2TR00&lang=en

Characteristic: Tripping characteristics, I^t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5980-2TR00/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5980-2TR00&objecttype=14&gridview=view1>

last modified:

05/18/2019