

motor operator 24-60V DC accessory for: 3VA1 160







Model	
Product brand name	SENTRON
Product designation	Accessories
Product version	Motorized operating mechanism (MO)
Accessories	Motorized operating mechanism (MO)

Mechanical Design	
Rated control supply voltage U_s with DC	24 V
Height	70 mm
Width	76.2 mm
Depth	103 mm
Net weight	578 g
Connectable conductor cross-section / solid / minimum	1.5 mm ²
Connectable conductor cross-section / solid / maximum	2.5 mm ²
Connectable conductor cross-section / finely stranded / with core end processing / minimum	1.5 mm ²
Connectable conductor cross-section / finely stranded / with core end processing / maximum	2.5 mm ²

Ambient temperature / during operation	
<ul style="list-style-type: none"> • minimum • maximum 	<p>-25 °C</p> <p>70 °C</p>
Ambient temperature / during storage	
<ul style="list-style-type: none"> • minimum • maximum 	<p>-40 °C</p> <p>80 °C</p>

Connections according IEC	
Wire stripping length	7 mm



Certificates


General Product Approval	EMC	Declaration of Conformity	Test Certificates	Shipping Approval
Miscellaneous 	 RCM	 EG-Konf.	Type Test Certificates/Test Report	 LRS

other
Miscellaneous

Further information

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)**
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9157-0HA10>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<https://support.industry.siemens.com/cs/ww/en/ps/3VA9157-0HA10>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9157-0HA10
- CAX-Online-Generator**
<http://www.siemens.com/cax>
- Tender specifications**
<http://www.siemens.com/specifications>

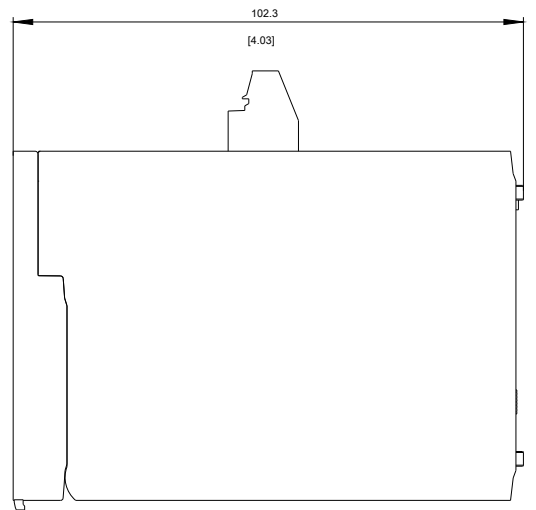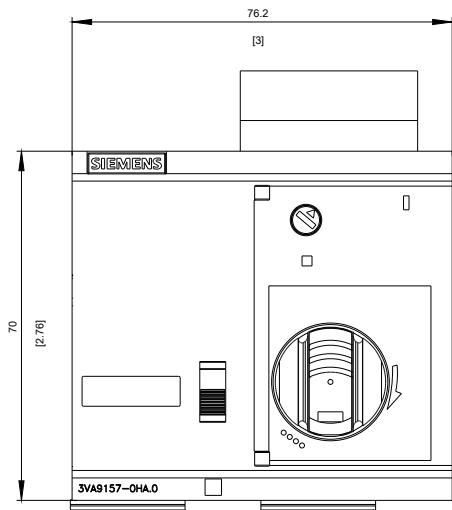

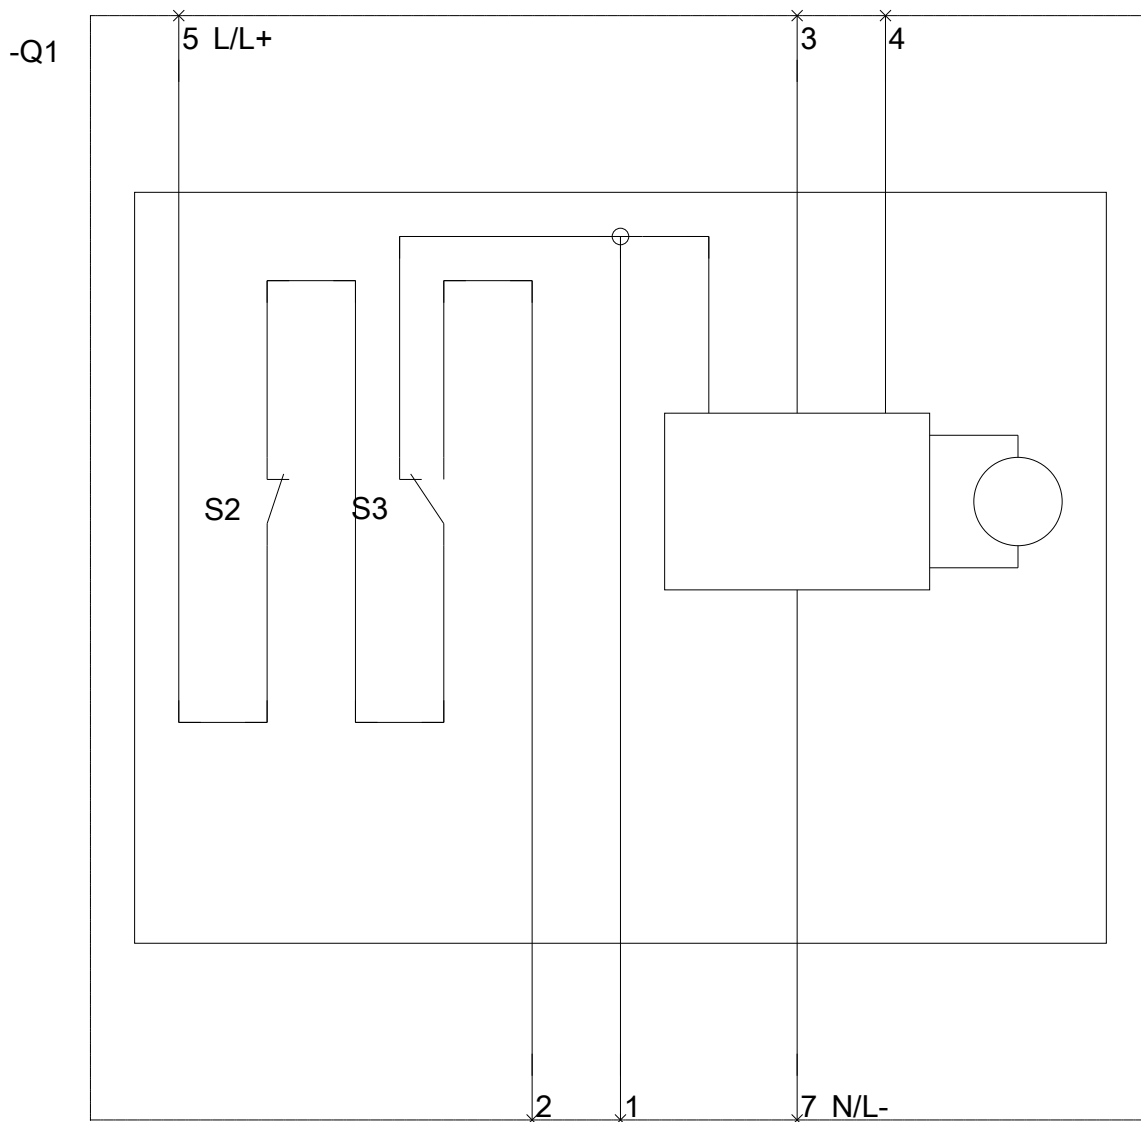

last modified:

11/17/2018