

motor operator 24-60V DC accessory for: 3VA1 400/630 3VA2 400/630



Model	
Product brand name	SETRON
Product designation	Accessories
Product version	Motorized operating mechanism (MO)
Accessories	Motorized operating mechanism (MO)





Mechanical Design	
Rated control supply voltage U_s with DC	24 V
Height	92 mm
Width	137.6 mm
Depth	149 mm
Net weight	1 310 g
Connectable conductor cross-section / solid / minimum	1.5 mm ²
Connectable conductor cross-section / solid / maximum	2.5 mm ²
Connectable conductor cross-section / finely stranded / with core end processing / minimum	1.5 mm ²
Connectable conductor cross-section / finely stranded / with core end processing / maximum	2.5 mm ²

Ambient temperature / during operation	
• minimum	-25 °C
• maximum	70 °C
Ambient temperature / during storage	
• minimum	-40 °C
• maximum	80 °C

Connections according IEC



Wire stripping length	7 mm
-----------------------	------


Certificates

General Product Approval	EMC	Declaration of Conformity	Shipping Approval	other
Miscellaneous		 RCM	 EG-Konf.	 LRS
				Miscellaneous

Further information

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)**
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9467-0HA10>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<https://support.industry.siemens.com/cs/ww/en/ps/3VA9467-0HA10>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9467-0HA10
- CAX-Online-Generator**
<http://www.siemens.com/cax>
- Tender specifications**
<http://www.siemens.com/specifications>

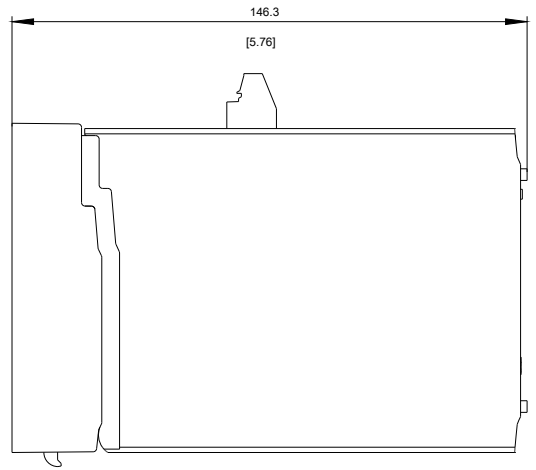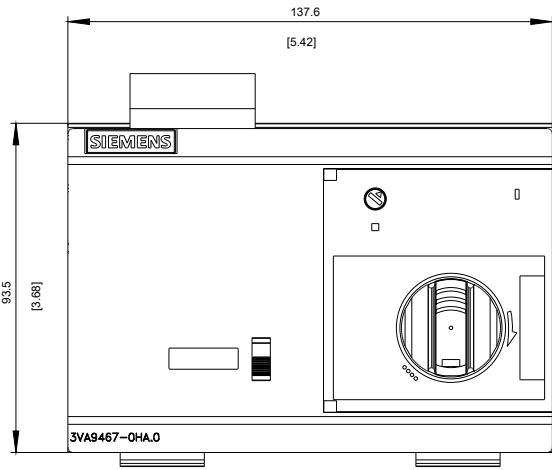

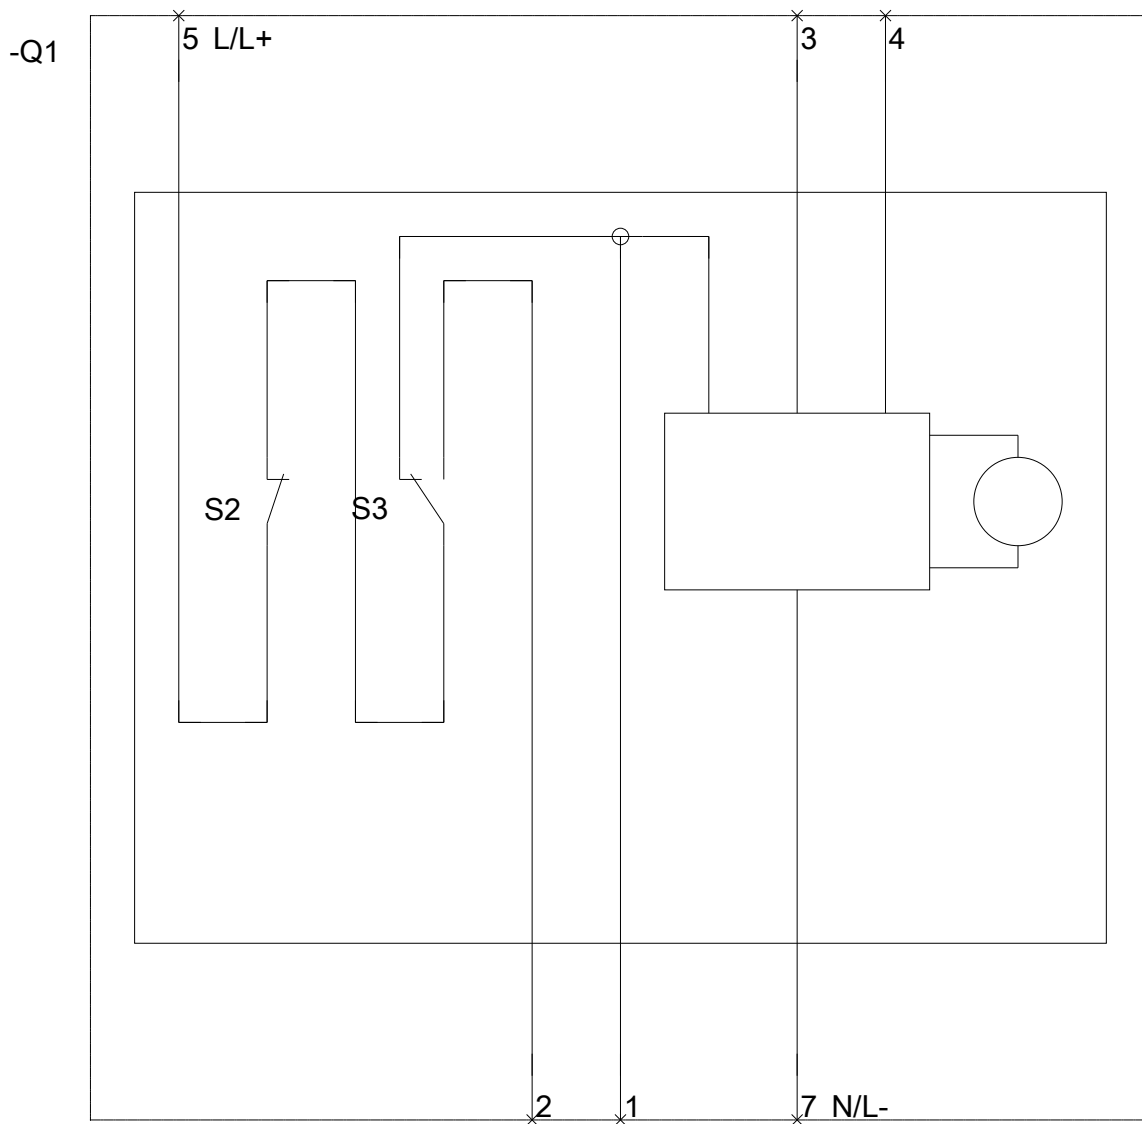

last modified:

12/18/2018