

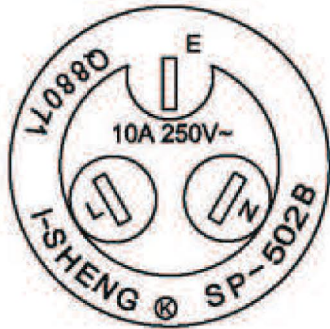
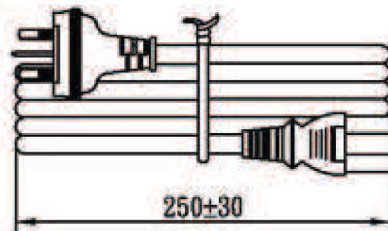


MARKING:

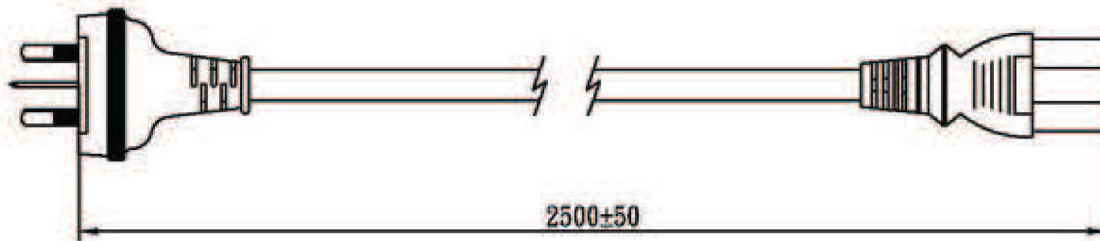

MARKING:

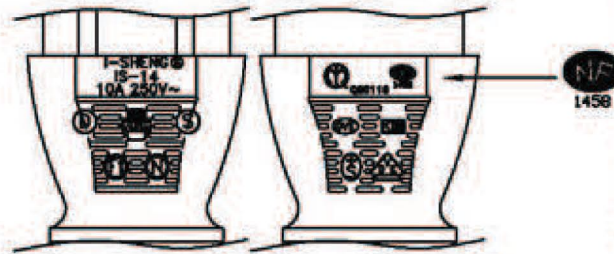

WIRING COLOR:

- E: Yellow/Green
- N: Blue
- L: Brown

LENGED ON CORD: (凹字)

I-SHENG KSIS <VDE> KEMA-KEUR <VE> ΔCEBEC 809
 NF-USE 1353 IEMMEQU H05VV-F 3G 1.0mm² 60227 IEC 53 RVV 300/500V A041481
 3ASL/100 4V-75 V-75(75°C) 250/440V ORDINARY DUTY Q90033 -LF-CE

No	BOM ITEM	Q'TY	P/N
1	SAA-118 BLADE	1 pcs	BBN11800
2	SAA-118 INSULATION BLADE	2 pcs	BBN1181N
3	SP-502B INNER BODY	1 pcs	MI502000
4	PVC 50P (SP-502B)	40 g	RPP05012
5	KPR-14 BLADE	3 pcs	BBB14000
6	IS-14 INNER BODY	1 pcs	MI014000
7	PVC 50P (IS-14)	14.3g	RPP05012
8	PE TIE (BLACK, 6 inch)	1 pcs	KBBPE115

CABLE	H05VV-F 3G 1.0 DENT PRINT CT-12 (BLACK)			
PLUG	SP-502B + IS-14	LENGTH	2480	UNIT mm
CLIENT	NAME	ELFA DISTRELEC	N/W	UNIT kg
	P/N	43-301-08 (ELFA)	KS DWG	SR-1203211-2 VER. A
Maxxtro®			Design. by	TESS
			Review. by	汪华高
			Approval. by	周家荣
V54 6C3016 12 250 00				