
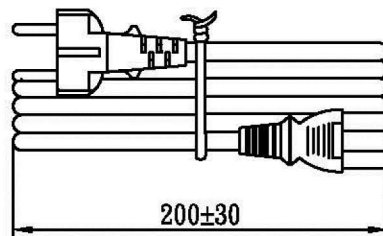


No	BOM ITEM	Q' TY	P/N
1	SP-023 INSERT	1 pcs	MB023012
2	PVC 50P (SP-022)	29.7 g	RPP05012
3	KPR-14 TERMINAL	3 pcs	BBB14000
4	IS-14 INNER BODY	1 pcs	MI014000
5	PVC 50P (IS-14)	14.3 g	RPP05012
6	PE TIE (BLACK, 6 inch)	1 pcs	KBBPE115

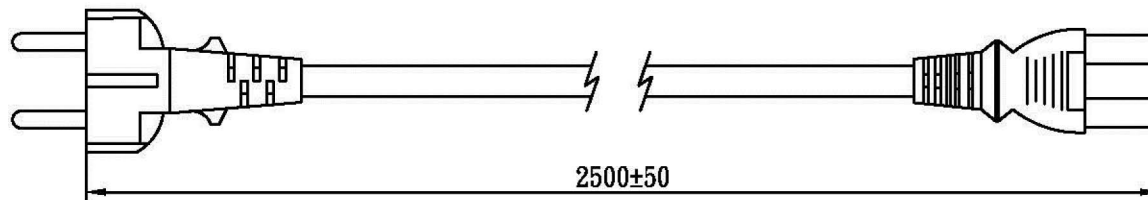

WIRING COLOR:
 E: Yellow/Green
 N: Blue
 L: Brown

LENGED ON CORD: (四字)

I-SHENG KSIS <VDE> KEMA-KEUR <OVE> △CEBEC 809 S D N F
 NF-USE 1353 IEMMEQU H05VV-F 3G 1.0mm² 60227 IEC 53 RVV 300/500V A041481
 3ASL/100 4V-75 V-75(75°C) 250/440V ORDINARY DUTY Q90033 -LF-CE

CABLE	H05VV-F 3G 1.0 DENT PRINT CT-12 (BLACK)			
PLUG	SP-022 + IS-14	LENGTH	2500	UNIT mm
CLIENT	NAME	Eifa	N/W	UNIT kg
	P/N	43-526-45	KS DWG	SR-1210151-2 VER. A
Maxxtro®			Design. by	TESS
			Review. by	汪華高
			Approval. by	周家榮
V24 6C3016 12 250 00				