





MARKING:

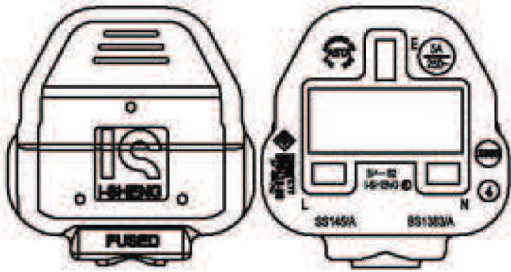

MARKING:

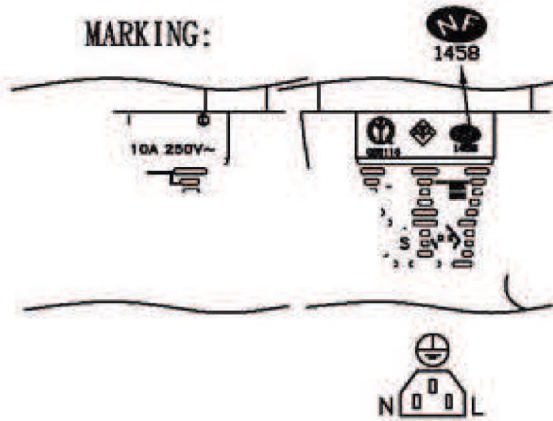

No	BOM ITEM	Q'TY	P/N
1	SP62 NICKEL INSERT	1 pcs	MB062012
2	FUSE 5A	1 pcs	KFB0005A
3	SP62 FUSE COVER	1 pcs	MI0622RA
4	SP60 INNER BODY COVER	1 pcs	MI0621RA
5	SP62 BLADE	1 pcs	BEN63L00
6	PVC 50P (SP62)	40 g	RPP05012
7	KPR-14 BLADE	3 pcs	BBB14000
8	IS-14 INNER BODY	1 pcs	MI014000
9	PVC 50P (IS-14)	14.3 g	RPP05012
10	PE TIE (BLACK, 6 inch)	1 pcs	KBBPE115
11	LABEL 5A	1 pcs	KLC10005

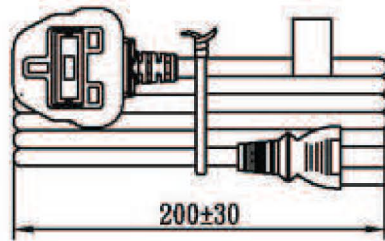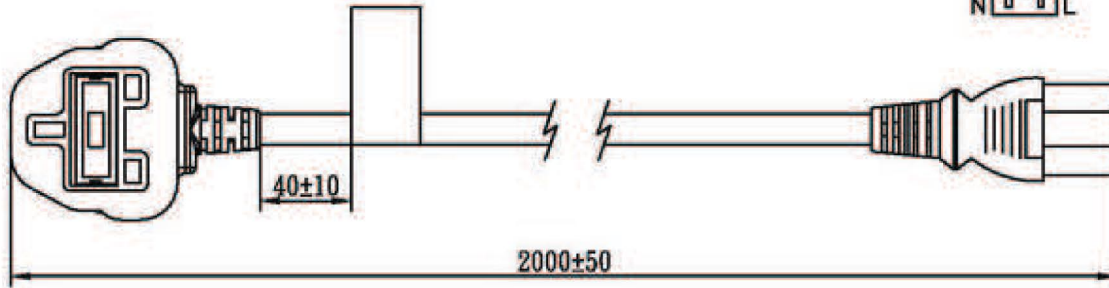

WIRING COLOR:

E: Yellow/Green
N: Blue
L: Brown

LENGED ON CORD: (凹字)

I-SHENG KSIS ◁VDE▷ KEMA-KEUR ◁VE▷ △ CEPEC 809 NF-USE
1353 IEMMEQU H05VV-F 3G 0.75mm² 60227 IEC 53 RVV 300/500V A041481
3ASL/75 4V-75 V-75(75°C) 250/440V ORDINARY DUTY Q88228 -LF- CE

CABLE	H05VV-F 3G 0.75 DENT PRINT CT-12 (BLACK)			
PLUG	SP-62 + IS-14 (5A)	LENGTH	1980	UNIT mm
CLIENT	NAME	ELFA DISTRELEC	N/W	UNIT kg
	P/N	43-303-04 (ELFA)	KS DWG	SR-1203211-3 VER. A
Maxxtro [®]			Design. by	TESS
			Review. by	汪华高
			Approval. by	周家荣
V62 6B3016 12 200 00				