

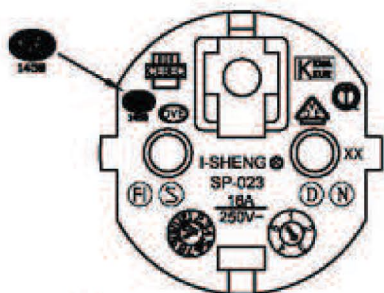
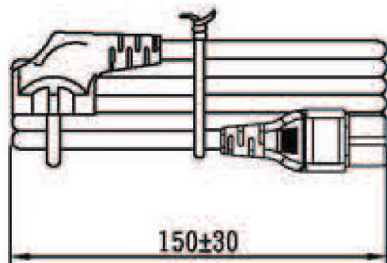


MARKING:

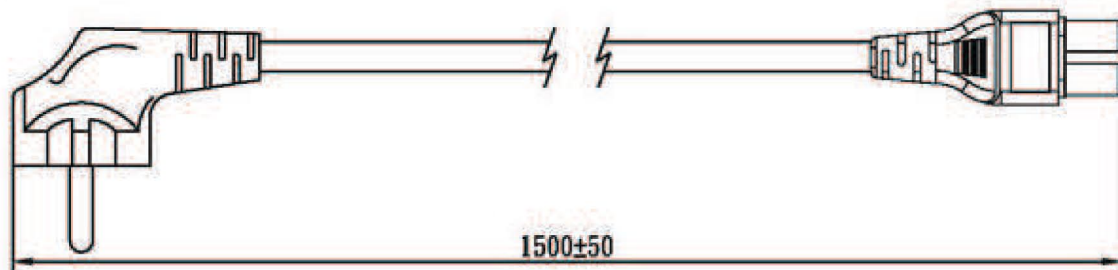

MARKING:

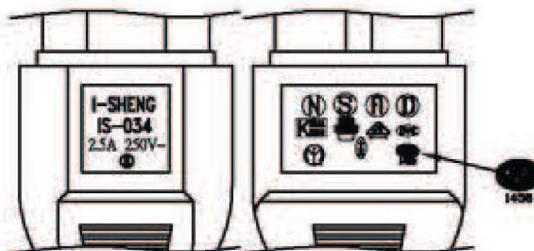

WIRING COLOR:

E: Yellow/Green
N: Blue
L: Brown

LENGED ON CORD: (凹字)

I-SHENG KSIS ◁VDE▷ KEMA-KEUR 符合符合 ◁BVE▷ △ CEBC 809 ⑤⑥⑦⑧ NF-USE
1353 IEMMEQU H05VV-F 3G 0.75mm² 60227 IEC 53 RVV 300/500V Ⓜ A041481
3ASL/75 4V-75 V-75(75°C) 250/440V ORDINARY DUTY Q88228 -LF- CE

No	BOM ITEM	Q'TY	P/N
1	SP-023 INSERT	1 PCS	MB023012
2	PVC 50P (SP-023)	45 g	RPP05012
3	□2.35B PHOSPHOR BRONZE TUBE	2 pcs	BPP235B3
4	□3.2 PHOSPHOR BRONZE TUBE	1 pcs	BPP32300
5	IS-034 INNER BODY	1 pcs	MP334012
6	PVC 50P (IS-034)	10.4 g	RPP05012
7	PE TIE (BLACK, 6 inch)	1 pcs	KBBPE115

CABLE	H05VV-F 3G 0.75 DENT PRINT CT-12 (BLACK)			
PLUG	SP-023 + IS-034	LENGTH	1480	UNIT mm
CLIENT	NAME	ELFA DISTRELEC	N/W	UNIT kg
	P/N	43-313-06 (ELFA)	KS DWG	SR-1203213-4 VER. A
Maxxtro [®]			Design. by	TESS
			Review. by	汪华高
			Approval. by	周家荣
Y33 6B3016 12 150 00				