



Meets your requirements: A variably settable torque covers a large application area.
Simplifies your work: All tools securely arranged in a robust, orderly bag. **Lowers your costs:** Electrostatically conductive tools protect electronic components from damage.
Protect your health: With the patented SoftFinish® handle design, ensuring work is kind to hands and muscles. Recommended by doctors and therapists at German Campaign for Healthier Backs. **Increases your efficiency:** The correct torque avoids damaging material and no follow-up work is necessary.

Torque screwdriver set TorqueVario®-S ESD

mixed, 13 pcs., variably adjustable torque limit, 0,4-1,0 Nm in box

Order-No. 43898

More information: Page 209


The perfect complement:



Pliers set Professional ESD

Order-No. 33507

More information: Page 316

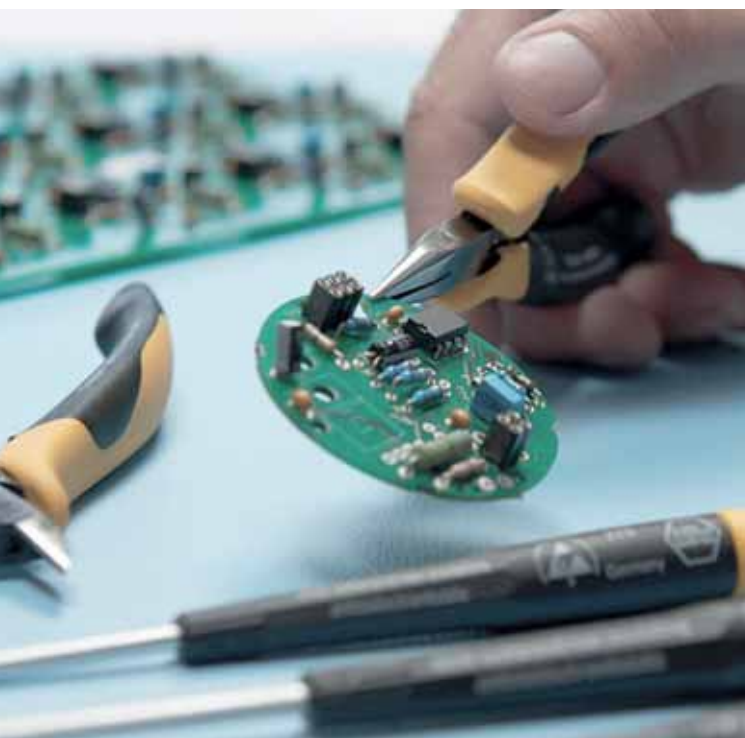

Electrostatic conductive ESD tools

Sensitive, electronic components can be damaged even at a very low voltage.

Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.

ESD tools meet the ESD Standard IEC 61340-5-1.

ESD tool handles have a surface resistance of $10^6 - 10^9$ Ohm.

Torque screwdriver set TorqueVario®-S ESD



mixed, 13 pcs., variably adjustable torque limit, 0,4-1,0 Nm in box

2882 S10

| Order-No. | Icon | Description |
|-----------------------|------|---|
| 43898 | | 1 |
| <input type="radio"/> | | Torque screwdriver TorqueVario®-S ESD Variable torque limit settings / 0,4-1,0 Nm |
| <input type="radio"/> | | Bit holder clamping with ball for torque screwdriver with long handle |
| | | Adjusting tool for torque screwdriver with long handle |
| <input type="radio"/> | | 4,0 x 25 / 4,5 x 25 |
| <input type="radio"/> | | PH0 x 25 / PH1 x 25 |
| <input type="radio"/> | | PZ0 x 25 / PZ1 x 25 |
| <input type="radio"/> | | T4 x 25 / T5 x 25 / T6 x 25 / T8 x 25 |

IEC 61340-5-1. DIN EN ISO 6789.

Torque screwdriver TorqueVario®-S ESD




○ Variable torque limit settings

2882

| Order-No. | Nm | ±% | ○ | ☰ | ☷ | ☰ |
|-----------|------------|-----|---|-----|----|---|
| 36851 | 0,04-0,46• | 10% | 4 | 127 | 23 | 1 |
| 26865 | 0,1-0,6 | 10% | 4 | 127 | 23 | 1 |
| 36852 | 0,1-0,6 | 6% | 4 | 127 | 23 | 1 |
| 26629 | 0,4-1,0 | 6% | 4 | 127 | 23 | 1 |
| 26866 | 0,5-2,0 | 6% | 4 | 131 | 30 | 1 |
| 30495 | 0,8-5,0 | 6% | 4 | 138 | 36 | 1 |

• Precision in range of 0.1-0.46 Nm. IEC 61340-5-1. DIN EN ISO 6789.

INFOBOX:
Electrostatic
conductive ESD
tools



Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of $10^6 - 10^9$ Ohm.